FED. SUP CLASS
9505

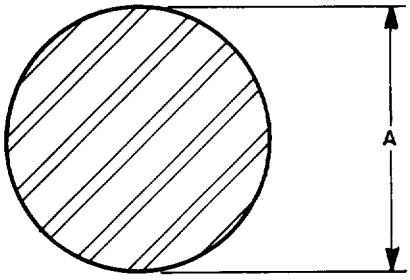

TABLE I. DASH NUMBERS

DASH NO	A
001	.063
003	.093
005	.125
007	.188
009	.250
011	.312

REQUIREMENTS:

1. MATERIAL. TOOL STEEL TYPE 01 (UNS T31501), AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. LENGTH. STANDARD LENGTH OF ROUND WIRE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. FORMING PROCESS. HOT FORMED.
4. FINISH. AS SPECIFIED IN PROCUREMENT DOCUMENT.
5. HEAT TREATMENT. ANNEALED.
6. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS52047-001
   - 001 — DASH NUMBER FROM TABLE I
   - MS52047 — BASIC MS NUMBER

7. MARKING. TOOL STEEL SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 31 JUL 85 REVISED

P.A. MR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust 99		WIRE, ROUND, NONELECTRICAL, TOOL STEEL, TYPE 01	MS52047
PROCUREMENT SPECIFICATION ASTM-A681	SUPERSEDES:		PAGE 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9505-0160

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-AR, EA, MI
AIR FORCE-84
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:18Z
Check the source to verify that this is the current version before use.