[INCH-POUND]
A-A-2971
June 7, 1996
SUPERSEDING
GGG-P-00477A
May 23, 1967

# COMMERCIAL ITEM DESCRIPTION

## PLIERS, SLIP JOINT (LINE CLAMP)

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of line clamp slip joint pliers specified in Interim Federal Specification GGG-P-00477A for all federal agencies.

1. SCOPE

1.1 Scope. This Commercial Item Description covers one type of line clamp slip joint pliers used for installing line clamps.

2. CLASSIFICATION Not applicable.

3. SALIENT CHARACTERISTICS

3.1 Design. The pliers shall simultaneously hold a number 10 bolt, compress single and multiple line clamps, and automatically retain them in a closed position, leaving both hands free to apply the clamp nut or additional clamps. The pliers shall be provided with a three hole slip joint adjustment capable of a 3/4 inch adjustment. The pliers shall be properly proportioned in all parts so as to be strong, durable and easy to operate. The pliers shall be similar to figure 1.

3.1.1 Clamp holding and release test. Using a number 10 bolt, and a commercial line clamp, clamp and hold one clamp, then insert and hold two additional clamps in succession. After holding three clamps, install the retaining nut and remove the pliers without disturbing the nut or requiring the use of separate mechanical means.

3.2 Material. The pliers shall be made of steel and either investment casted or forged. The joint and retaining pawl shall be steel. The pliers shall be free from pits, rips, fins, burrs, tears, nodules, cracks, pinholes. gaps and blisters which may adversely impact the plier's serviceability, durability, safety, or appearance.

3.3. Jaws. The jaws shall operate through the maximum spread of the tool in a smooth and uniform manner.

3.3.1 Lower Jaw. The lower jaw shall be slotted to allow clearance over a number 10 bolt. The lower jaw shall contain a mechanism for retaining a number 10 bolt. The lower jaw shall contain a retaining pawl for holding the line clamp in a closed position.

Beneficial comments, recommendations, additions, deletions, clarification, etc. and any data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center (6FETE-CO), Washington, DC 20406



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.3.2 Upper Jaw. The upper jaw shall be slotted to allow sufficient clearance for operation.

3.4 Joint. The pliers shall be joined in a permanent manner through the use of a bolt and nut. There shall be uniform smooth movement through the respective number of adjustment positions with a minimum of looseness and sideplay. The joint shall not loosen or require adjustment.

3.5 Retaining pawl. The retaining pawl shall be securely attached to the lower jaw and be capable of holding the clamp in the closed position.

3.6 Handles. The handles shall be shaped to afford a comfortable handgrip and shall be free from rough edges and corners. Inner handle surfaces shall be well rounded or beveled so as to prevent injury to the hand. The outer hand grip surfaces of the handles shall be knurled, impressed or scored to minimize hand slippage.

3.7 Dimensions. The pliers shall be in accordance with the dimensions of figure 1. The jaw thickness of the pliers shall be 1/2 inch plus or minus 1/16 inch. The specified dimensions shall be taken with the pliers in the first working position, as shown. Unless otherwise specified limits on dimensions are: Fractional dimensions - plus or minus 1/2 inch; angular dimensions - plus or minus 5 degrees.

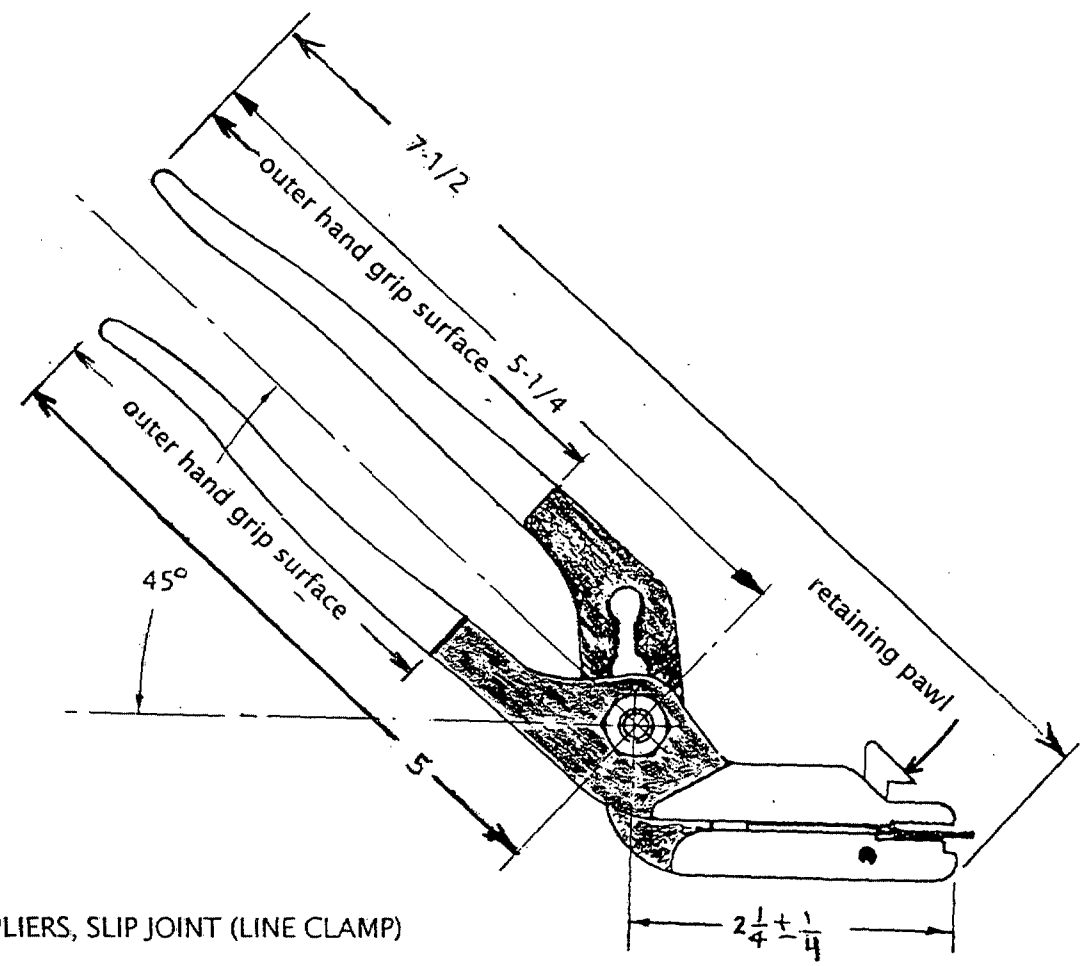



Figure 1. PLIERS, SLIP JOINT (LINE CLAMP)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.9 Finish. All surfaces shall be clean and free of pits, nodules , burrs, cracks, or other detrimental defects.

3.10. Coating. Excluding the joint and retaining pawl, the pliers shall be nickel or chromium plated. The joint and pawl shall be coated with black oxide..

3.11 Instructions. The pliers shall be furnished with an instruction sheet. The instruction sheet shall contain written step-by-step instructions and illustrations showing how line clamps can be assembled and fastened.

3.12 Identification marking. The pliers shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.13 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Coatings, platings, and finishes shall be smooth adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety or appearance.

4. REGULATORY REQUIREMENTS

4.1 Recovered Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

## 5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) may be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

## 6. PACKAGING

6.1 Packaging. Requirements for preservation, packing, and marking of packages shall be as specified in the contract or order.

## 7. NOTES

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of reference documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

Federal Acquisition Regulations (FAR): Government Printing Office Superintendent of Documents, Washington, DC 20401-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 43201-4606.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and shall include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required and the number of samples required.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspections are required and the applicable lot sampling requirements.

For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be S-3 with an Acceptable quality level (AQL) of 2.5 percent defective.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable quality level (AQL) of 2.5 percent defective..

(e) What preservation, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The applicable NSN for this Commercial Item Description is 5120-00-770-9362. This NSN may not be indicative of all possible NSNs associated with this Commercial Item Description.

Military Interests:

None: DoD has no registered interest in revisions and notices to this Commercial Item Description until further notice.

Preparing Activity

GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.