MILITARY SPECIFICATION SHEET

# FUSE BOXES, FEEDER DISTRIBUTION, TOTALLY ENCLOSED, 125/250 VOLTS, DIRECT CURRENT, THREE WIRE BUSES, TWO WIRE BRANCHES, 0-30 AMPERE MIDGET FUSES, SYMBOLS 609, 610 AND 611

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

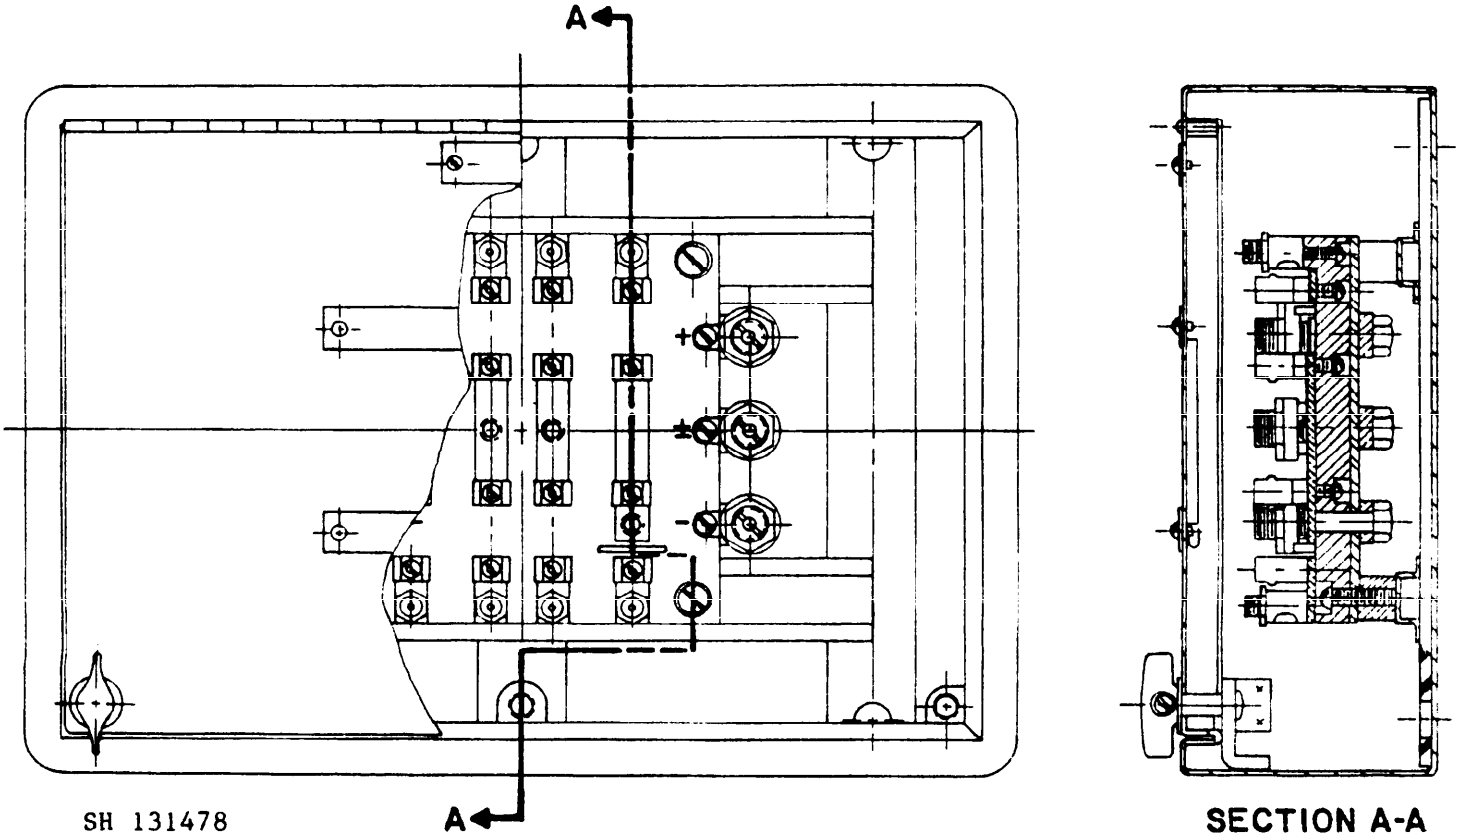



FIGURE 1. Fuse box assembly, typical. 01 02 03
(Symbol 609 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:26Z
Check the source to verify that this is the current version before use.

| SYMBOL NO. | DIMENSIONS (REF) A | B | C |
|---|---|---|---|
| 609 | 14.16 | 10.16 | 4.25 |
| 610 | 18.16 | 10.16 | 4.25 |
| 611 | 22.16 | 10.16 | 4.25 |

04 05 06

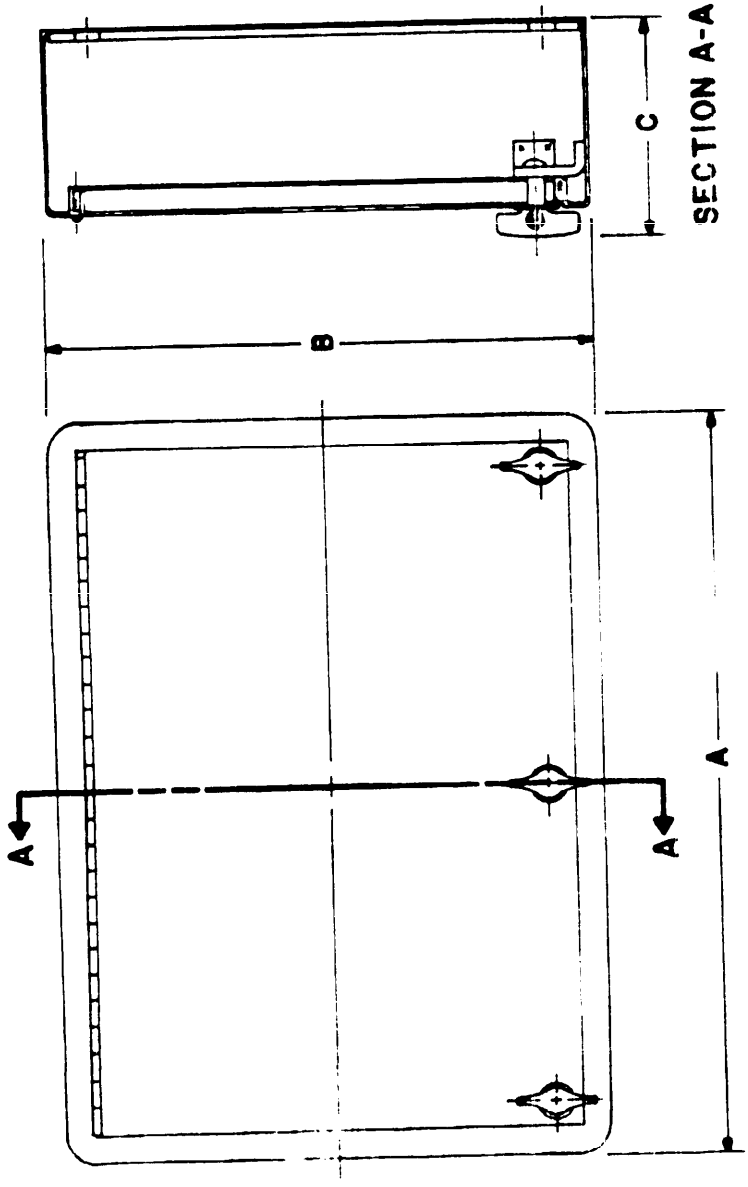




FIGURE 2. Enclosure, overall dimensions.
(Symbols 609, 610, and 611)

SH 131479




Source: https://assist.dla.mil -- Downloaded: 202610-20T00:26Z
Check the source to verify that this is the currentversion before use.

| SYMBOL NO. | DIMENSIONS A | B |
|---|---|---|
| 609 | 5.00 | 10.00 |
| 610 | 6.50 | 13.00 |

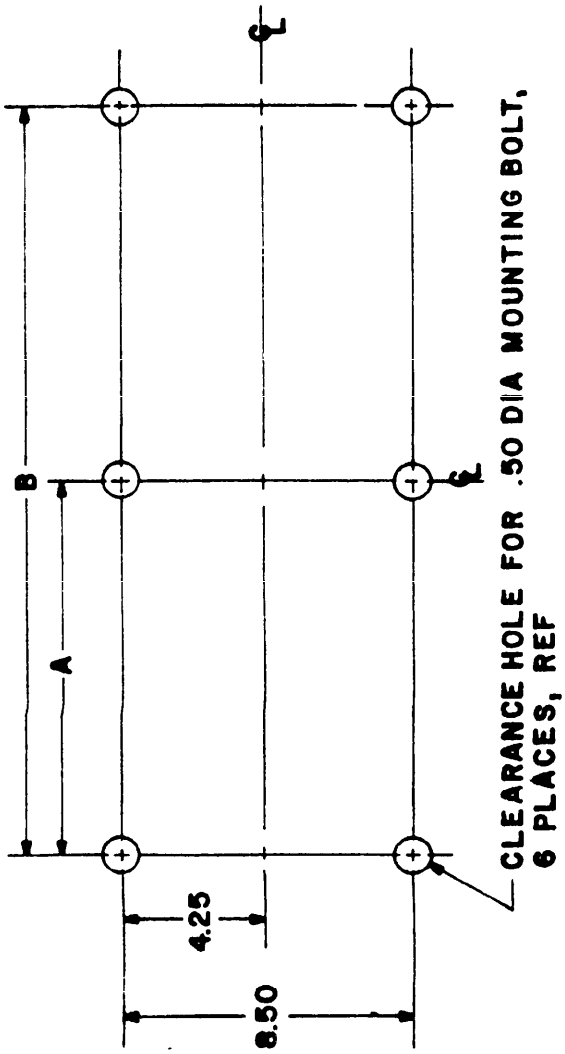


A. Symbols 609, and 610

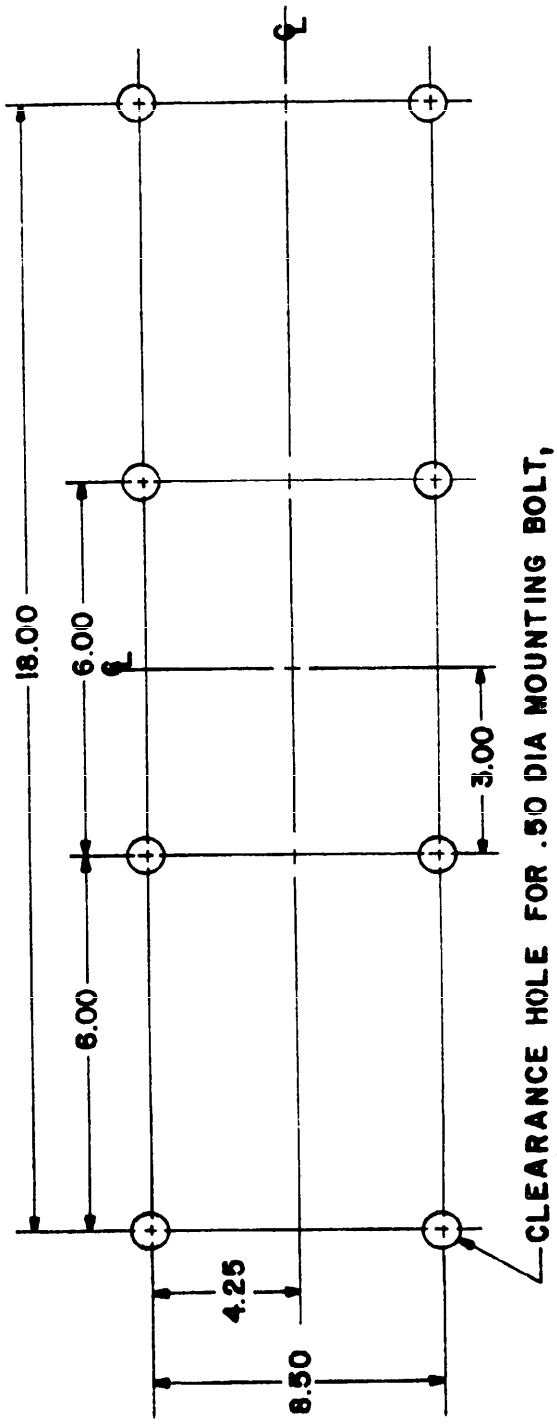


B. Symbol 611


FIGURE 3. Mounting dimensions, ref.

SH 131480



Source: https://assist.dla.mil -- Downloaded: 202610-20T00:26Z
Check the source to verify that this is the current version before use.

| SYMBOL NO. | DIMENSIONS (MAX.) | | |
|---|---|---|---|
| | A | B | C |
| 609 | 7.25 | 5.75 | 2.20 |
| 610 | 12.12 | 5.75 | 2.20 |
| 611 | 17.00 | 5.75 | 2.20 |

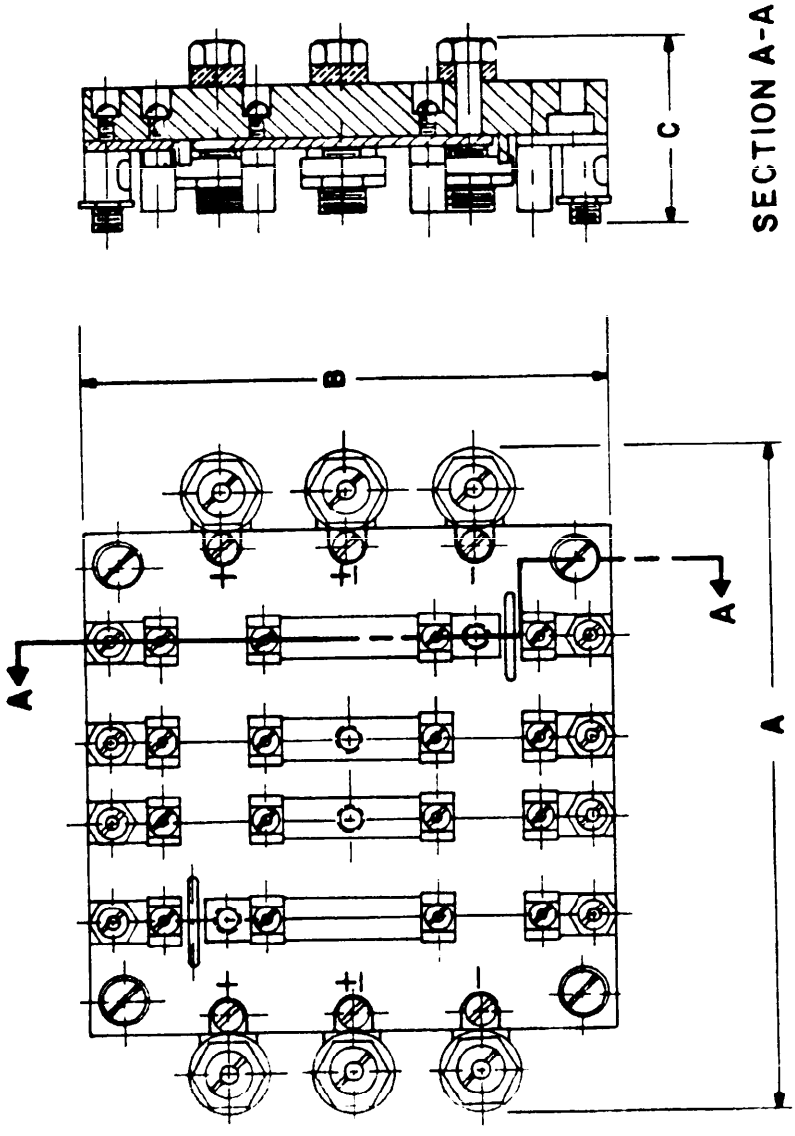



SH 131481

FIGURE 4. Fuse block assembly, typical. (07) (08) (09)


(Symbols 609, 610, and 611)




Source: https://assist.dla.mil -- Downloaded: 202610-20T00:26Z
Check the source to verify that this is the currentversion before use.

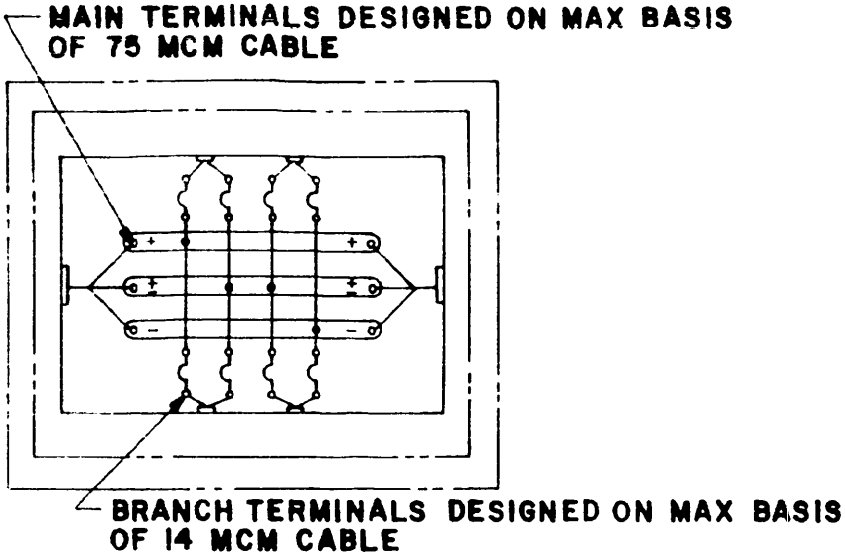


A. Four 2-wire branches (Symbol 609)

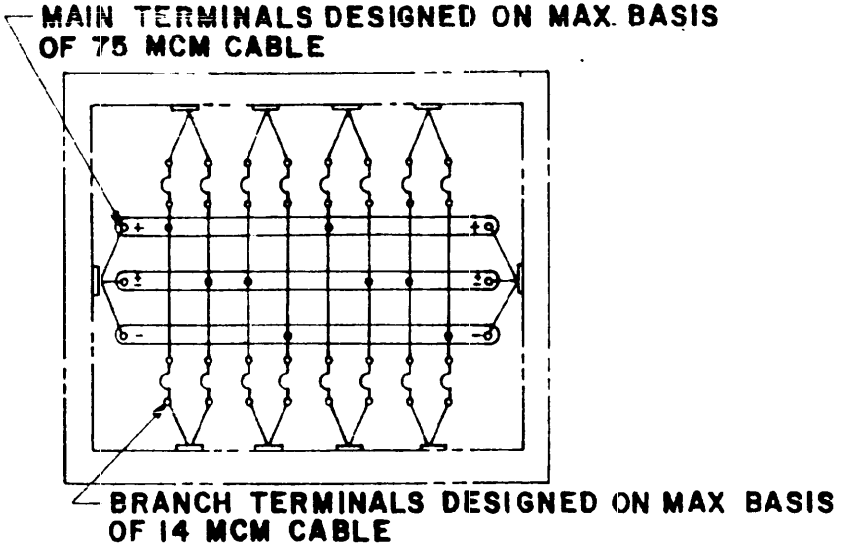


B. Eight 2-wire branches (Symbol 610)

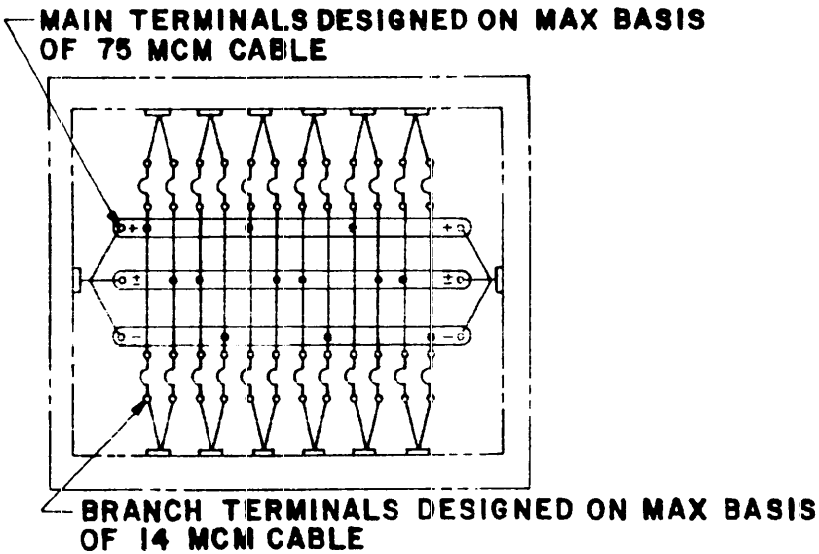


C. Twelve 2-wire branches (Symbol 611)

SH 131482

FIGURE 5. Wiring diagrams. (10) (11) (12)





Source: https://assist.dla.mil -- Downloaded: 2026/10-20T00:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:

Electrical rating: 125/250 volts direct current, 0-30 ampere.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Totally enclosed.
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:

Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

| Military part no. | Symbol no. | Weight in pounds | No. of circuits | Feeder MCM | Branch MCM | Fuse size | Bus bar size | Supersedes | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Drawing no. | Type |
| M24646/2-001 | 609 | 19.0 | 4 | 75 | 14 | midget 0-30A | 0.62 x 0.19 | 9000-S-6202 -73160 | LL-S |
| M24646/2-002 | 610 | 24.6 | 8 | 75 | 14 | midget 0-30A | .62 x .19 | 9000-S-6202 -73162 | NN-S |
| M24646/2-003 | 611 | 29.4 | 12 | 75 | 14 | midget 0-30A | .62 x .19 | 9000-S-6202 -73163 | PP-S |



Source: https://assist.dla.mil -- Downloaded: 202640-20T00:26Z
Check the source to verify that this is the currentversion before use.

TABLE II. Parts list.

| Item no.1/ | Description | QTY M /- | | | Material/spec | Remarks |
|---|---|---|---|---|---|---|
| | | 001 | 002 | 003 | | |
| 01 | Fuse box assembly (sym 609) | - | | | MIL-F-24646/2 | See figure 1 |
| 02 | Fuse box assembly (sym 610) | | - | | MIL-F-24646/2 | See figure 1 |
| 03 | Fuse box assembly (sym 611) | | | - | MIL-F-24646/2 | See figure 1 |
| 04 | Enclosure (10 x 14 x 3.5) | 1 | | | M24142/16-001 | See figure 2 |
| 05 | Enclosure (10 x 18 x 3.5) | | 1 | | M24142/16-003 | See figure 2 |
| 06 | Enclosure (10 x 22 x 3.5) | | | 1 | M24142/18-002 | See figure 2 |
| 07 | Fuse block assembly | 1 | | | MIL-F-24646/2 | See figure 4 |
| 08 | Fuse block assembly | | 1 | | MIL-F-24646/2 | See figure 4 |
| 09 | Fuse block assembly | | | 1 | MIL-F-24646/2 | See figure 4 |
| 10 | Wiring diagram | 1 | | | MIL-E-2036 | See figure 5 |
| 11 | Wiring diagram | | 1 | | MIL-E-2036 | See figure 5 |
| 12 | Wiring diagram | | | 1 | MIL-E-2036 | See figure 5 |
| 13 | Fuse clip (midget 0-30A) | 16 | 32 | 48 | M21346/1-04 | ---- |
| 14 | Identification plate | 1 | 1 | 1 | Brass, QQ-B-613 | ---- |
| 15 | Information plate | 4 | 8 | 12 | Brass, QQ-B-613 | ---- |

1/ Numbers in circles as shown on the figures are the same as the item numbers shown in this table.

Preparing activity:
Navy - SH
(Project 5920-N163-2)



Source: https://assist.dla.mil -- Downloaded: 202610-20T00:26Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:26Z
Check the source to verify that this is the current version before use.