NOTICE OF
REINSTATEMENT

INCH-POUND
MIL-F-24646/3
NOTICE 3
16 September 1997
SUPERSEDING
NOTICE 2
4 June 1996

MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, TOTALLY ENCLOSED, 125/250 VOLTS, DIRECT CURRENT, THREE WIRE BUSES, TWO WIRE BRANCHES, 0.30 AMPERE FUSES, SYMBOLS 540, 541 AND 542

MIL-F-24646/3, dated 30 November 1984, is hereby reinstated and may be used for acquisition.

Custodians:
Navy - SH

Preparing activity:
DLA - CC

(Project 5920-0551-05)

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, TOTALLY ENCLOSED, 125/250 VOLTS, DIRECT CURRENT, THREE WIRE BUSES, TWO WIRE BRANCHES, 0-30 AMPERE FUSES, SYMBOLS 540, 541 AND 542

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

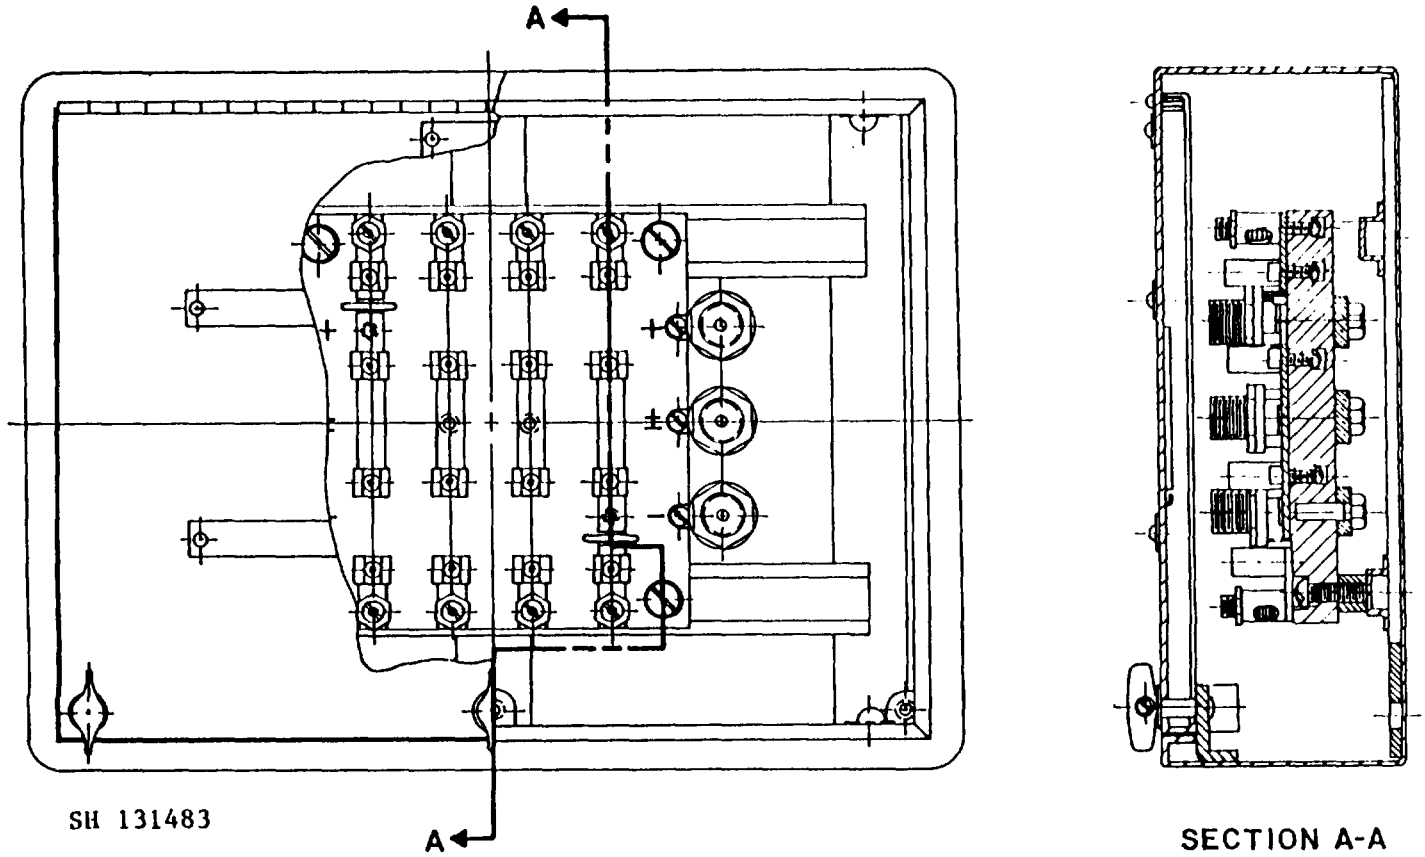



FIGURE 1. Fuse box assembly, typical. (01) (02) (03)
(Symbol 541 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

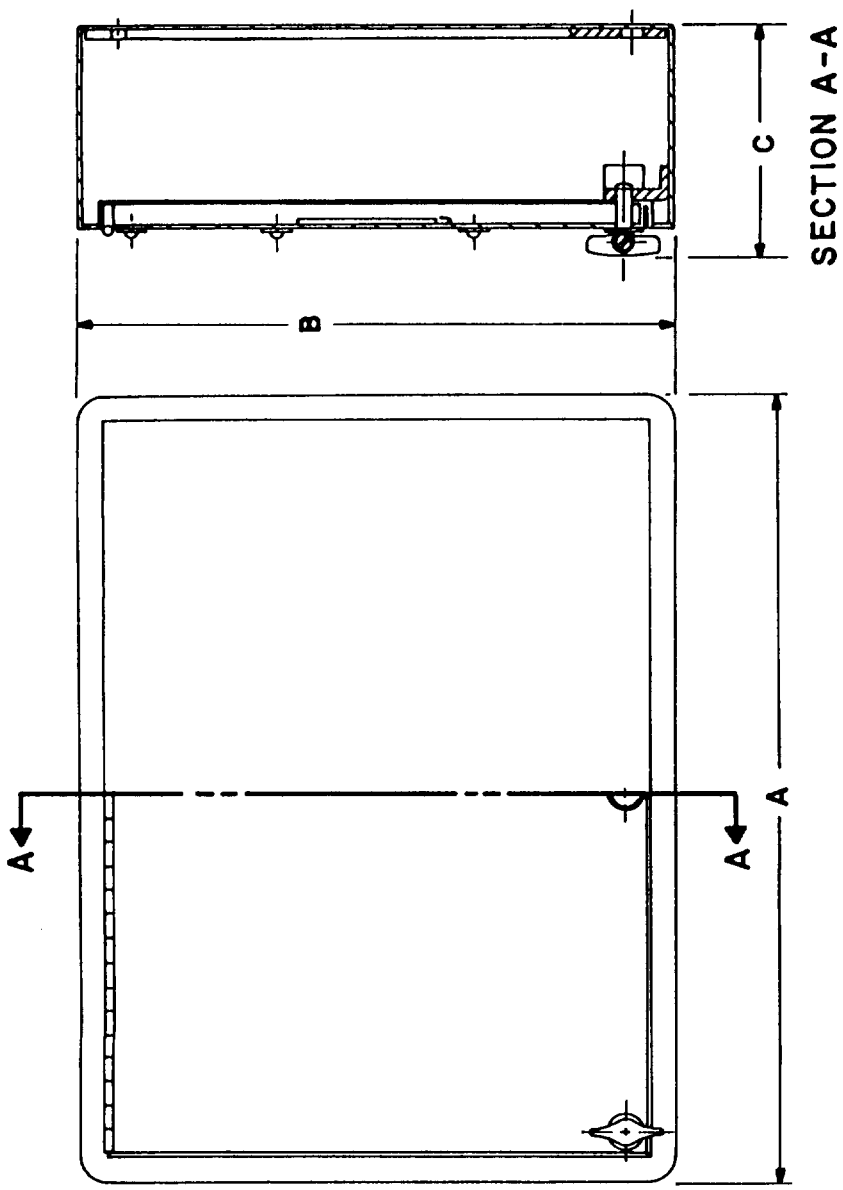


SYMBOL NO	DIMENSIONS (REF)		
	A	B	C
540	14.16	12.16	4.75
541	16.16	12.16	4.75
542	20.16	12.16	4.75

FIGURE 2. Enclosure, overall dimensions. (04) (05) (06)

(Symbols 540, 541, and 542)

SH 131484

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

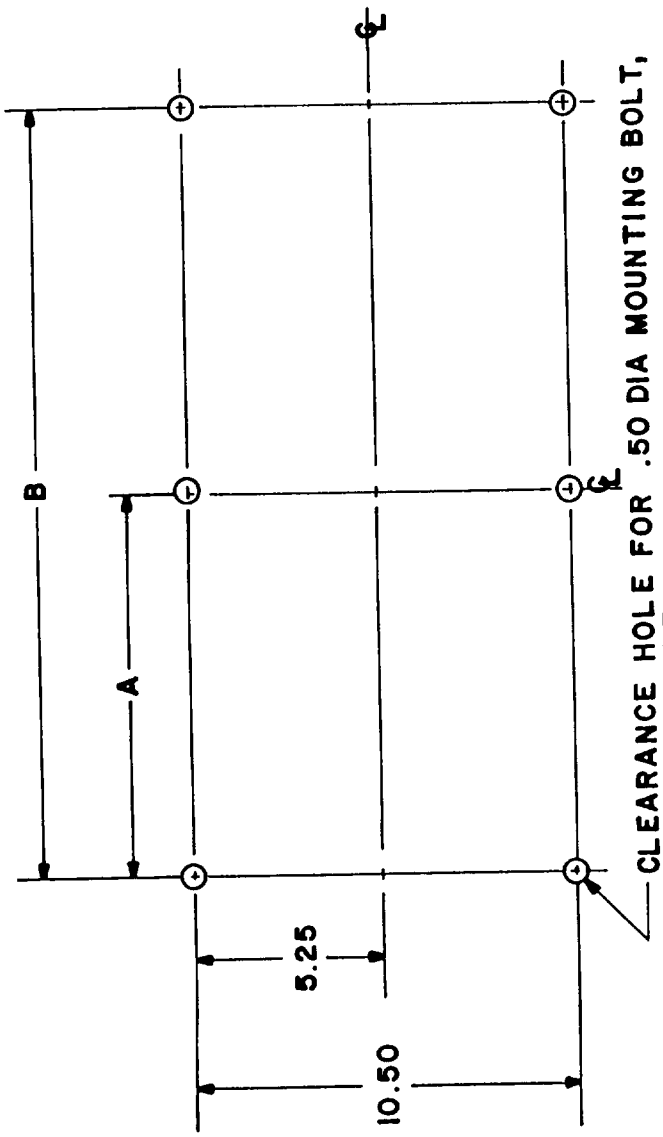


SYMBOL NO	DIMENSIONS	
	A	B
540	5.50	11.00
541	6.50	13.00
542	8.00	16.00

FIGURE 3. Mounting dimensions, ref.
(Symbols 540, 541, and 542)

SH 131485

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

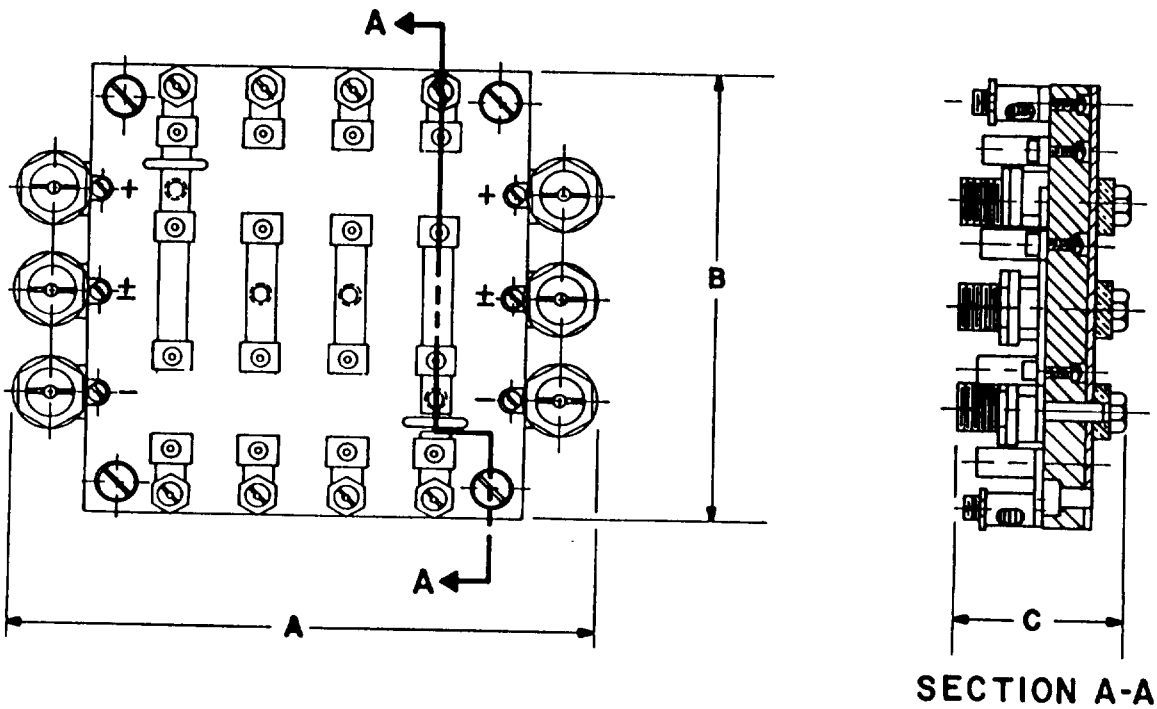


SYMBOL NO	DIMENSIONS(MAX)		
	A	B	C
540	4.12	7.12	2.80
541	6.88	7.12	2.80
542	10.00	7.12	2.80


SH 131486

FIGURE 4. Fuse block assembly, typical. 07 08 09
(Symbols 540, 541, and 542)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

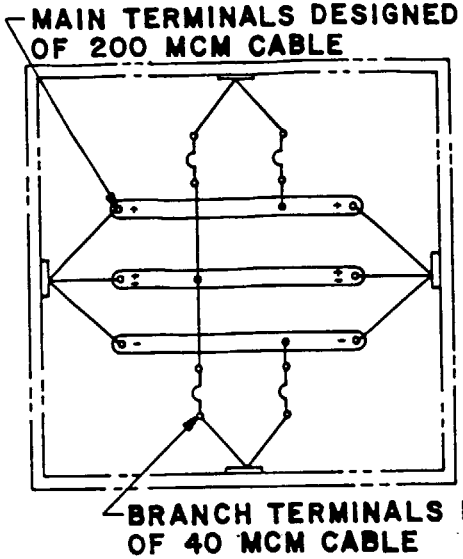

A. Two 2-wire branches
(Symbol 544)

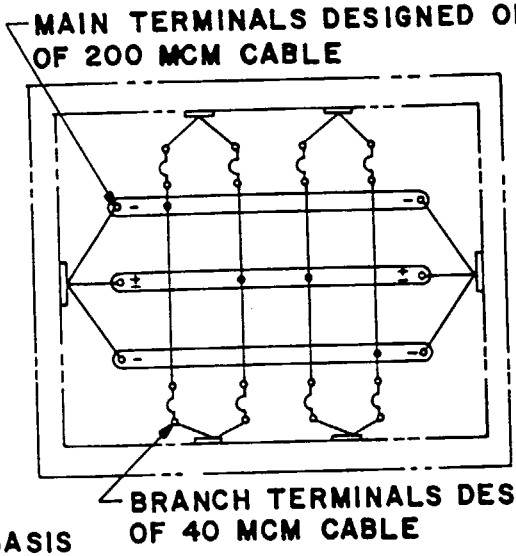

B. Four 2-wire branches
(Symbol 541)

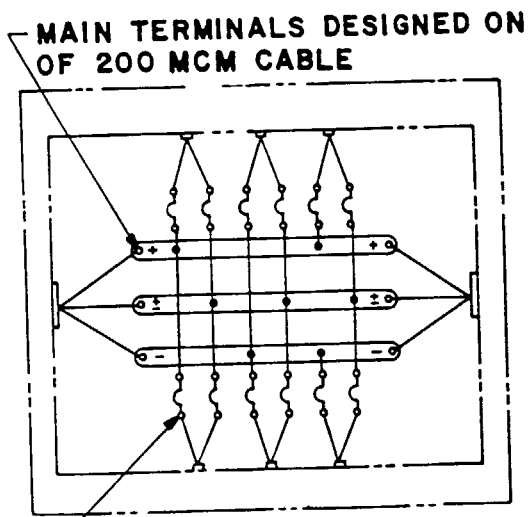

C. Six 2-wire branches
(Symbol 542)

SH 131487

FIGURE 5. Wiring diagrams. (10) (11) (12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 125/250 volts direct current, 0-30 ampere.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Totally enclosed.
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/3-001	540	22.0	2	200	40	0-30A	0.88 x 0.25	9000-S-6202-73157	II-S
M24646/3-002	541	25.4	4	200	40	0-30A	.88 x .25	9000-S-6202-73158	JJ-S
M24646/3-003	542	32.5	6	200	40	0-30A	.88 x .25	9000-S-6202-73159	KK-S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /-			Material/spec	Remarks
		001	002	003		
01	Fuse box assembly (sym 540)	-			MIL-F-24646/3	See figure 1
02	Fuse box assembly (sym 541)		-		MIL-F-24646/3	See figure 1
03	Fuse box assembly (sym 542)			-	MIL-F-24646/3	See figure 1
04	Enclosure (12 x 14 x 4)	1			M24142/16-004	See figure 2
05	Enclosure (12 x 16 x 4)		1		M24142/16-005	See figure 2
06	Enclosure (12 x 20 x 4)			1	M24142/16-007	See figure 2
07	Fuse block assembly	1			MIL-F-24646/3	See figure 4
08	Fuse block assembly		1		MIL-F-24646/3	See figure 4
09	Fuse block assembly			1	MIL-F-24646/3	See figure 4
10	Wiring diagram	1			MIL-E-2036	See figure 5
11	Wiring diagram		1		MIL-E-2036	See figure 5
12	Wiring diagram			1	MIL-E-2036	See figure 5
13	Fuse clip (0-30A)	8	16	24	M21346/1-06	-----
14	Identification plate	1	1	1	Brass, QQ-B-613	-----
15	Information plate	2	4	6	Brass, QQ-B-613	-----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Preparing activity:
Navy - SH
(Project 5920-N163-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:27Z
Check the source to verify that this is the current version before use.