
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No.0704-0188

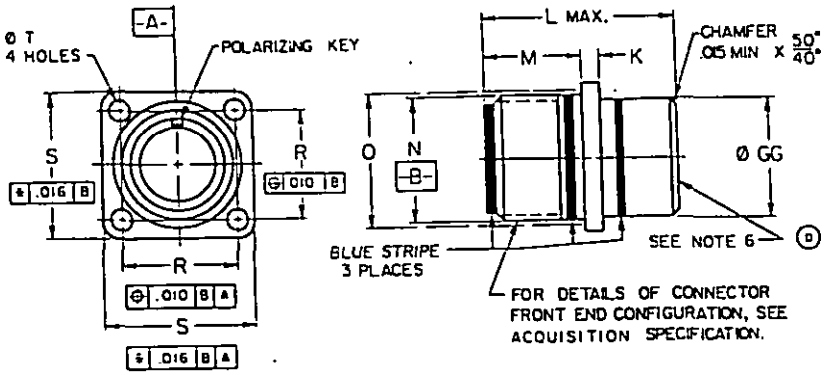

CLASSES L, U, AND W ENVIRONMENT RESISTANT
INTERFACE ONLY

CLASS K CANCELLED AFTER 9 MARCH 1972.
CLASS U INACTIVE FOR NEW DESIGN AFTER 23 MARCH 1976.
(D) USE CLASS L OR W FOR NEW DESIGN.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±.016.
(D) 3. DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5M - 1982.
4. MIL-C-5015 CRIMP CONTACT, FRONT AND REAR RELEASE CONNECTORS AND SOLDER CONTACT CONNECTORS ARE INTERMATABLE.
5. UNLESS OTHERWISE SHOWN, CORRESPONDING FEATURES OF PIN AND SOCKET CONTACT CONNECTORS ARE IDENTICAL.
6. FOR INSERT ARRANGEMENTS SEE MIL-STD-1651.
(D) 7. THE INSULATION MATERIAL SHALL BE ABOVE, FLUSH WITH, OR NO MORE THAN .015 INCH BELOW THE METAL SHELL AND ALL CONTACTS SHALL BE RECESSED BELOW THE INSULATION MATERIAL.
(D) 8. TOOLS USED FOR INSERTING AND REMOVAL OF CONTACTS SHALL BE AS SPECIFIED IN MIL-C-5015.
9. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.
10. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.
(D) 11. MANUFACTURERS MAY SUPPLY MS3452 REVISION C CONNECTORS UNTIL 1 SEPTEMBER 1994 OR EXHAUST THEIR INVENTORIES WHICHEVER COMES FIRST.

(D) DENOTES CHANGES

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY - CR AIR FORCE - 85 NASA - NA REVIEW: NAVY - EC ARMY - AT, ME, MI, AR AF - 11, 80, 99 USER: PROJECT NUMBER 5935-3561	MILITARY SPECIFICATION SHEET TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, REAR RELEASE, CRIMP CONTACT, AN TYPE WITH	SPECIFICATION SHEET NUMBER 15 FEB 1993 MS3452 REV D SUPERSEDING MS3452C 23 MAR 76 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED		Page 1 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015.


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No.0704-0188

(D) TABLE I. SIZE AND DIMENSIONS.

SIZE	ØGG ±0.16	K ±0.15	L MAX		M +.031 -.000	N +.000 -.062	O (REF) MTG HOLES	R C_1-C_1	S ±.031	T +.010 -.005
			SIZE 16 AND 12 CONTACTS	SIZE 8, 4 AND 0 CONTACTS						
8S	.500	.083	1.662		.562	.532	.562	.594	.875	.120
10S	.625	.083	1.662		.562	.656	.688	.719	1.000	.120
10SL	.625	.083	1.662		.562	.656	.688	.719	1.000	.120
12S	.750	.083	1.662		.562	.782	.812	.812	1.094	.120
12	.750	.083	1.662		.750	.782	.812	.812	1.094	.120
14S	.875	.083	1.662		.562	.906	.938	.906	1.188	.120
14	.875	.083	1.662		.750	.906	.938	.906	1.188	.120
16S	1.000	.083	1.662		.562	1.032	1.062	.969	1.281	.120
16	1.000	.083	1.662	1.937	.750	1.032	1.062	.969	1.281	.120
18	1.062	.125	1.662	1.937	.750	1.156	1.188	1.062	1.375	.120
20	1.187	.125	1.662	1.937	.750	1.282	1.312	1.156	1.500	.120
22	1.312	.125	1.662	1.937	.750	1.408	1.438	1.250	1.625	.120
24	1.437	.125	1.662	1.937	.812	1.532	1.562	1.375	1.750	.147
28	1.750	.125	1.662	1.937	.812	1.782	1.812	1.562	2.000	.147
32	2.000	.125	1.662	1.937	.875	2.032	2.062	1.750	2.250	.173
36	2.250	.125	1.662	1.937	.875	2.282	2.312	1.938	2.500	.173
40	2.500	.125	1.662	1.937	.875	2.532	2.562	2.188	2.750	.173
44	2.750	.125	1.662	1.937	.875	2.782	2.812	2.375	3.000	.173
48	3.000	.125	1.662	1.937	.875	3.032	3.062	2.625	3.250	.173

EXAMPLE OF PART NUMBER: MS3452W 22-3SY

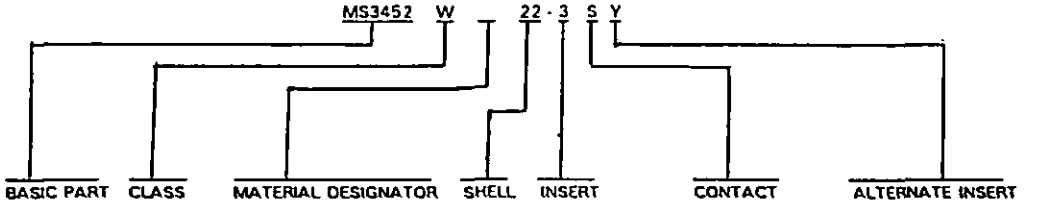

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY - CR
AIR FORCE - 85
NASA - NA
REVIEW: NAVY - EC
ARMY - AT, ME, MI, AR
AF - 11, 80, 99
USER:

PROJECT NUMBER 5935-3561

MILITARY SPECIFICATION SHEET
TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, REAR RELEASE, CRIMP CONTACT, AN TYPE WITH

SPECIFICATION SHEET NUMBER 15 FEB 93

MS3452 REV D

SUPERSEDING
MS3452C 23 MAR 76

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.