
FED. SUP CLASS
2330

REVIEW ACTIVITIES: AF-84
USER ACTIVITIES: ARMY - ME

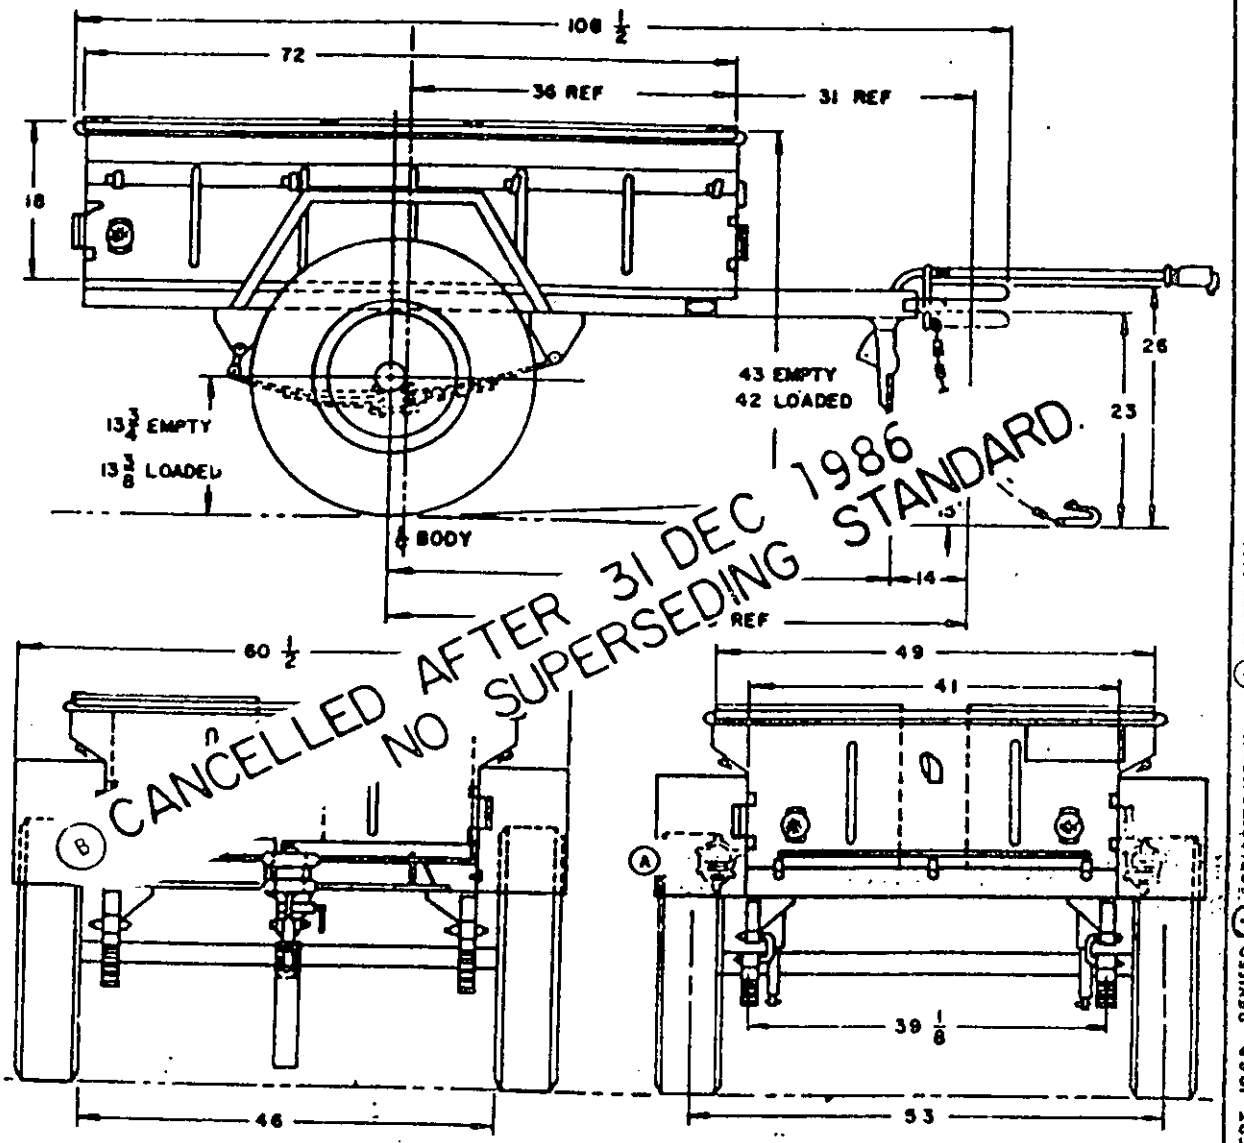

CANCELLED AFTER 31 DEC 1986
NO SUPERSEDING STANDARD

APPROVED 6 SEPT 1968 REVISED (A) 20 SEPTEMBER 1974 (B) 31 DEC 1986

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for procurative use shall be made from this document.

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY

(B) DENOTES CHANGE SEE SHEETS 1 AND 2

MS PART NO	ENGINEERING PARTS LIST
MS 52100	8736716

P.A. ARMY - AT
Other Cust AF - 84

TITLE
TRAILER, MAINTENANCE: PHONE CABLE SPLICER, 1/4 TON, 2 WHEEL, MILITARY DESIGN, M 716

PROCUREMENT SPECIFICATION MIL-T-10578

SUPERSEDES:

MILITARY STANDARD
MS52100

SHEET 1 OF 2

2330-0944

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 2330

VEHICLE CHARACTERISTICS

(A) CURB WEIGHT: 840 LBS

(A) WEIGHT DISTRIBUTION:
UNLOADED:
WHEELS 747 LBS
LANDING LEG 93 LBS
LOADED WITH 230 LBS MAX ALLOWABLE PAYLOAD:
WHEELS 970 LBS
LANDING LEG 100 LBS

(REFERENCED WEIGHTS ARE FOR ENGINEERING REFERENCE ONLY).

BASIC TRAILER: M416 REF. MS 500069 8736302

BASIC CHASSIS: M569 REF. MS 53027 8736401

FORDING DEPTH: SUBMERSIBLE FOR 15 MINUTES

BODY ASSEMBLY: 10924559
NOTE: BODY IS DETACHABLE FROM CHASSIS

FENDERS, CARGO TRAILER: 10924564

LUNETTE & BRACKET ASSY: 10924561
LANDING LEG 7343007

ANCHOR, LUNETTE & BRACKET: 10924579
LUNETTE (REF) 7328311

DRAW BAR: CHASSIS
CHANNEL ASSY-L.H. 10924587-1
CHANNEL ASSY-L.H. 10924587-2

FRAME ASSY: CHASSIS 10924570
CROSSMEMBERS, FIVE
SIDE RAIL-CHANNEL
3-11/32 X 1-3/4 X 13 GA. (.0897)
SECTION MODULUS .667 IN.³

SUSPENSION: INSTL 10924574
AXLE: MS 35865-D1 10924598
CAPACITY 2500 LBS
SPRINGS: SEMI-ELLIPTICAL 7328358
1-3/4 WIDE X 35-1/4 LONG, 10 LEAVES

SHOCK ABSORBERS: TWO 7697442
DOUBLE ACTION, HYDRAULIC

WHEELS: SINGLE 10921860
SIZE: 16 X 4.50, 2-5/16 OFFSET

TIRES: 7.00 x 16 LIGHT WEIGHT 6 PLY TUBE TYPE;
(A) NON-DIRECTIONAL CROSS-COUNTRY TREAD DESIGN

BRAKES: SERVICE, NONE

BRAKES: CONTROL INSTL 10924574
BRAKE ASSY, L.H. 8678952
BRAKE ASSY, R.H. 8678953
BRAKE SIZE 9 X 2 INCHES

HUB & DRUM ASSY: TWO, 10924574
LEVER ASSEMBLY, HAND BRAKE 10920594
BRACKET, HAND BRAKE MOUNTING 10924596

NAME PLATE: 11597814

ELECTRICAL: INSTL 10924550
POTENTIAL, 24 VOLTS
HARNESS ASSY 10924552
CABLE ASSY-INTERVEHICULAR 8722864
(A) COMPOSITE LIGHT - TAIL, STOP, TURN AND MARKER - MS 52125-2

REFLECTORS:
TRAILER BODY: RED, FOUR MS 35387-1

TIE DOWNS: FOUR, 7328275

(A) MAXIMUM TOWING SPEED:
CROSS-COUNTRY 15 MPH
GRAVEL ROADS 35 MPH
HIGHWAY 50 MPH

CHEST ASSEMBLIES: TWO 7971882
RETAINERS, FOUR 7971905
ANGLES, FOUR 11597802
BRACKETS, FOUR 11597803
COTTERPINS, FOUR MS 24665-349 7971905
PIN, FOUR 7971904
PIN, FOUR 11597803
COTTERPINS, FOUR MS 24665-210
PAULIN, ONE 10913205

ADDITIONAL EQUIPMENT AVAILABLE:
SAFTEY CHAIN, TWO 10944739

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS OF BID)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM;

U.S. ARMY TANK AUTOMOTIVE COMMAND
WARREN, MICHIGAN 48090

(B) CANCELLED AFTER 31 DEC 1986
NO SUPERSEDING STANDARD.

APPROVED 6 SEPT 1968 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2 (B) 31 DEC 1986

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Other Cust	TITLE: TRAILER, MAINTENANCE: PHONE CABLE SPLICER, 1/4 TON, 2 WHEEL, MILITARY DESIGN, M716	MILITARY STANDARD MS 52100
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.