INCH-POUND

MIL-PRF-28876/10F
4 October 2004
SUPERSEDING
MIL-C-28876/10E
4 MAY 1995

PERFORMANCE SPECIFICATION SHEET

# CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG STYLE, MULTIPLE REMOVABLE TERMINI, DUST COVER, SCREW THREADS, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification sheet and MIL-PRF-28876.

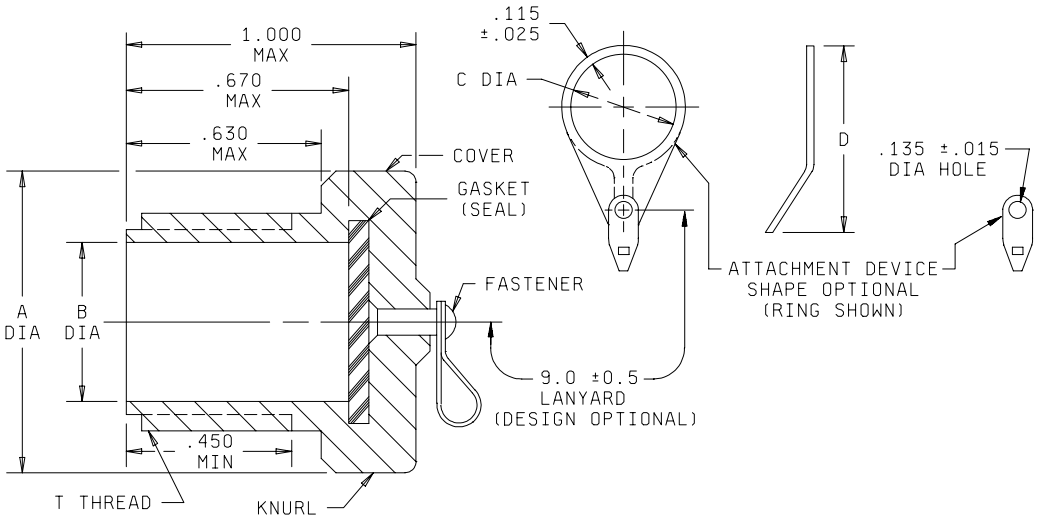


| Inches | mm |
|---|---|
| .005 | 0.13 |
| .010 | 0.25 |
| .015 | 0.38 |
| .025 | 0.64 |
| .030 | 0.76 |
| .032 | 0.81 |
| .047 | 1.19 |
| .050 | 1.27 |
| .115 | 2.92 |
| .135 | 3.43 |
| .450 | 11.43 |
| .630 | 16.00 |
| .670 | 17.02 |
| 1.000 | 25.40 |

FIGURE 1. Plug dust cover.

AMSC N/A

FSC 6060

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

| Shell size | T thread class 2A | A dia max | | B dia | | C dia | | D max | |
|---|---|---|---|---|---|---|---|---|---|
| | | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
| 11 | .750-.1P-.2L-D.S | 1.028 | 26.11 | .581<br>.569 | 14.75<br>14.45 | .775<br>.755 | 19.68<br>19.17 | 1.650 | 41.91 |
| 13 | .875-.1P-.2L-D.S | 1.141 | 28.98 | .705<br>.693 | 17.90<br>17.60 | .900<br>.880 | 22.86<br>22.35 | 1.800 | 45.72 |
| 15 | 1.062-.1P-.2L-D.S | 1.263 | 32.08 | .877<br>.865 | 22.27<br>21.97 | 1.025<br>1.005 | 26.03<br>25.53 | 1.950 | 49.53 |
| 23 | 1.500-.1P-.2L-D.S | 1.703 | 43.26 | 1.299<br>1.287 | 32.99<br>32.69 | 1.463<br>1.443 | 37.16<br>36.65 | 2.483 | 63.07 |

NOTES:
1. Dimensions are in inches.
2. Dimensions apply to plated/finished part.
3. Metric equivalents are given for general information only.

FIGURE 1. Plug dust cover - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 2.5 ounces (70.875 g) maximum.

Lanyard shall be free to rotate on fastener.

Gasket shall be mechanically captive to the cover.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Marking:

Part or Identifying Number (PIN):

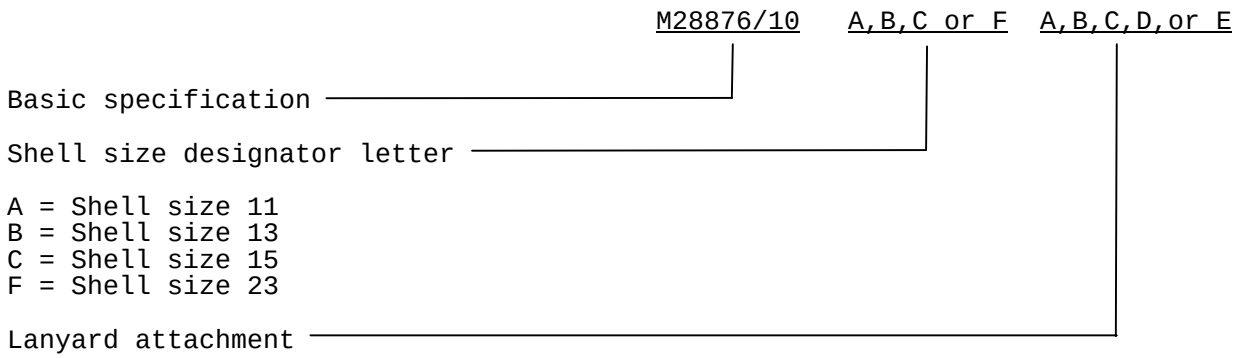


PIN example: M228876/10-AA.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

## CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Review activities:
Navy - AS
Air Force - 13, 19, 93, 99
DIA - DI
NASA - NA

Preparing activity:
Navy-SH

Agent:
DLA - CC

(Project 6060-0144-10)

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://www.dodssp.daps.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.