MILITARY STANDARD

MIL-STD-1323-372
(NAVY)
25 MARCH 1991

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

MK 50 TORPEDO (WARSHOT AND EXERCISE)
IN CONTAINER MK 714 MOD 1

UNIT LOAD DATA

NUMBER OF TORPEDOES PER CONTAINER	1	
NUMBER OF CONTAINERS PER UNIT LOAD	2	
GROSS WEIGHT OF ONE CONTAINER	1200	LBS
WEIGHT OF STEEL STRAPPING	2	LBS
GROSS WEIGHT OF UNIT LOAD	2402	LBS △
CUBE	90.3	CU FT

△ DO NOT USE FOR SHIPPING WEIGHT


DO NOT STACK MORE THAN 2 1/2 UNIT LOADS OR 5 CONTAINERS HIGH IN STORAGE.

FOR HAZARD CLASSIFICATIONS, SEE NAVSEA OP 2165.

SHIPPING AND STORAGE CONTAINER, MK 714 MOD 1
DRAWING 5371I-6213165

CONTAINER DIMENSIONS

LENGTH	137
WIDTH	23
HEIGHT (OVERALL)	24 3/8
(STACKING)	24

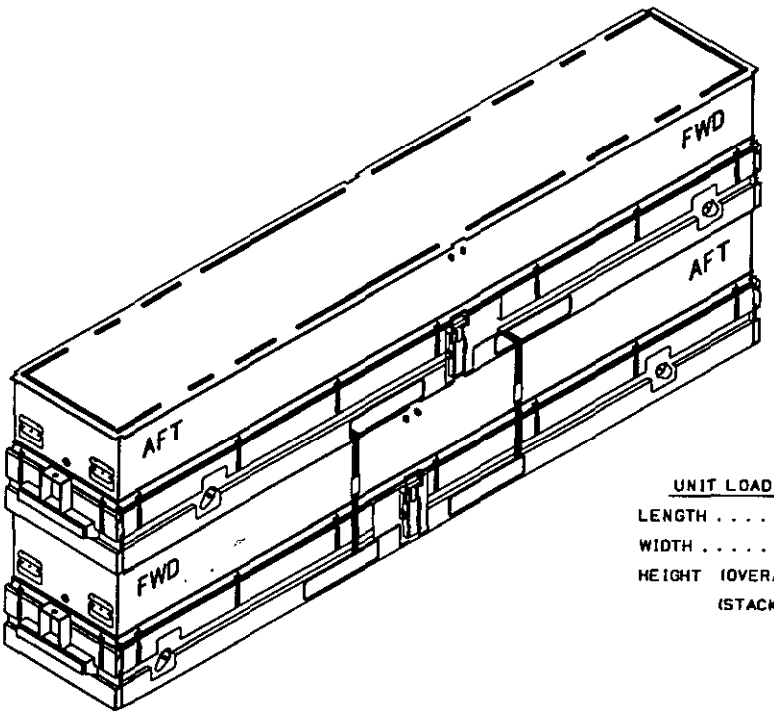

UNIT LOAD DIMENSIONS

LENGTH	137
WIDTH	23
HEIGHT (OVERALL)	48 3/8
(STACKING)	48

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

C. Stanton — 3/25/91
SIGNATURE — TDA, WPNSTA EARLE — DATE

K. Carrier — 3/25/91
SIGNATURE — SEASYSCOM BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — David W Hughes — 20 MAR 91 — DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE


(A) STACK ONE MK 714 MOD 1 CONTAINER ON TOP OF ANOTHER WITH THE AFT END OF THE TOP CONTAINER DIRECTLY OVER THE FWD END OF THE BOTTOM CONTAINER AS SHOWN BELOW. BE SURE TO ALIGN THE STACKING FEATURES.

(B) POSITION STRAPPING, ITEM 1, THROUGH THE FORK POCKETS OF THE TOP AND BOTTOM CONTAINERS AS SHOWN. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 2. NOTE: A 10 INCH PIECE OF 1 X 6 PLACED UNDER THE STRAPPING IN THE CONTAINER COVER AREA WILL SUPPORT THE TENSIONING TOOL.

(C) MIXED UNIT LOADS OF MK 714 MOD 0 AND MOD 1 CONTAINERS SHOULD BE UNITIZED IN ACCORDANCE WITH MIL-STD-1323-348.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

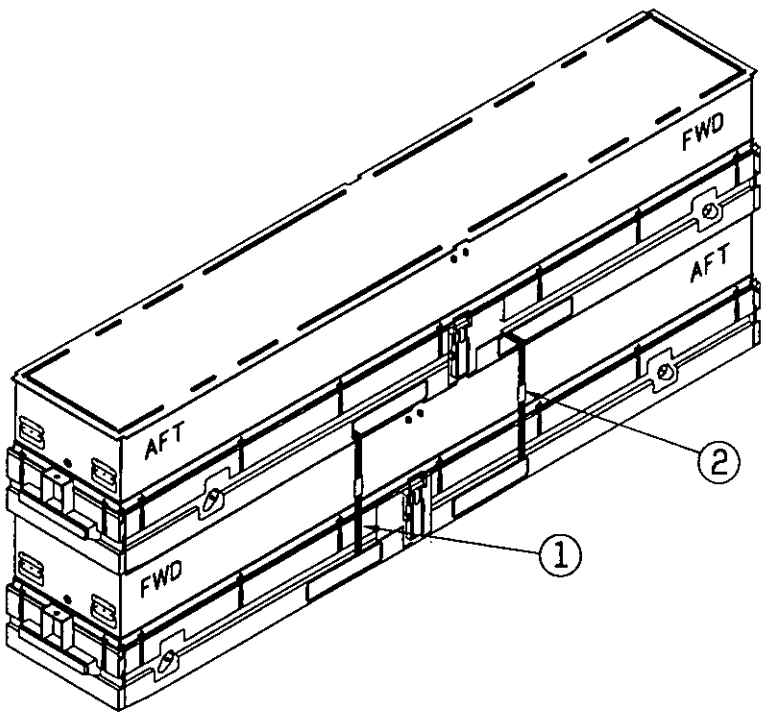

DEUNITIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.
(B) REMOVE TOP CONTAINER.

NOTES:

1. ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT, MIL-STD-1323 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	2	SEAL	SEE NOTE 1	1 1/4
2	1	STEEL STRAPPING	SEE NOTES 1 & 2	1 1/4 X .035 X 9 FT

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N967)

Source: https://assistdla.mil/ - Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.