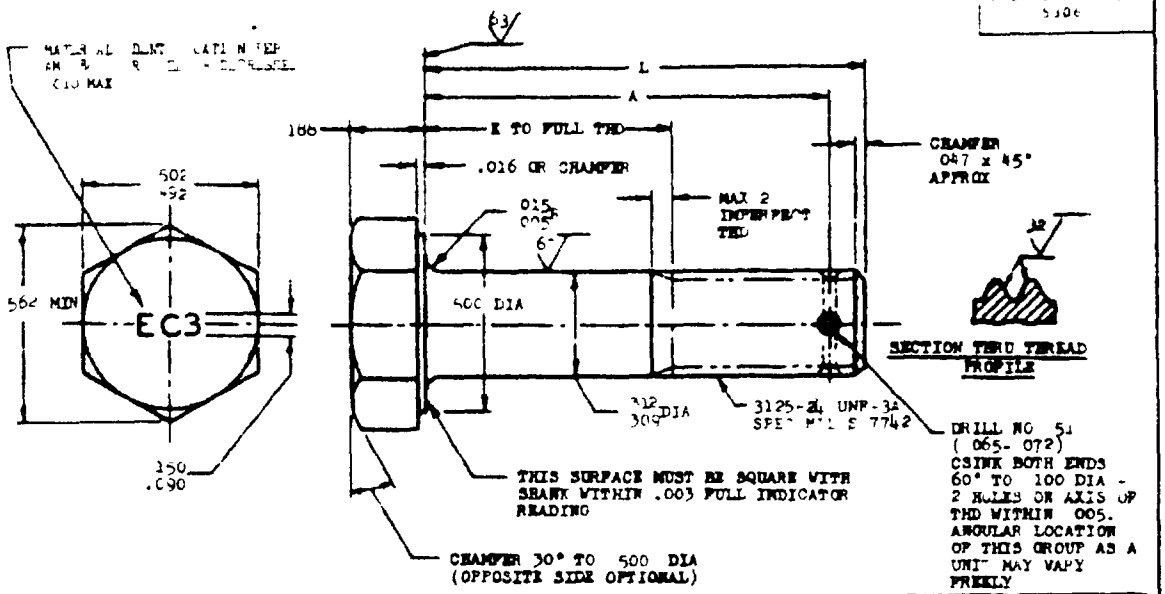


L	A	K +.000 -.060	PART NO	L	A	K +.000 -.060	PART NO.	L	A	K +.000 - 060	PART NO
				.875	1.765	1.188	AN105725	4.500	4.390	3.812	AN105746
				2.000	1.890	1.312	AN105726	4.625	4.515	3.938	AN105747
625	.515	(a)	AN105706	2.125	2.015	1.438	AN105727	4.750	4.640	4.062	AN105748
688	.578	(a)	AN105707	2.250	2.140	1.562	AN105728	4.875	4.765	4.188	AN105749
750	.640	(a)	AN105708	2.375	2.265	1.688	AN105729	5.000	4.890	4.312	AN105750
812	.702	.125	AN105709	.500	2.390	1.812	AN105730	5.125	5.015	4.438	AN105751
875	.765	.188	AN105710	2.625	2.515	1.938	AN105731	5.250	5.140	4.562	AN105752
938	.828	.250	AN105711	2.750	2.640	2.062	AN105732	5.375	5.265	4.688	AN105753
1.000	.890	.312	AN105712	2.875	2.765	2.188	AN105733	5.500	5.390	4.812	AN105754
1.062	.952	.375	AN105713	3.000	2.890	2.312	AN105734	5.625	5.515	4.938	AN105755
1.125	1.015	.438	AN105714	3.125	3.015	2.438	AN105735	5.750	5.640	5.062	AN105756
1.188	1.078	.500	AN105715	3.250	3.140	2.562	AN105736	5.875	5.765	5.188	AN105757
1.250	1.140	.562	AN105716	3.375	3.265	2.688	AN105737	6.000	5.890	5.312	AN105758
1.312	1.202	.625	AN105717	3.500	3.390	2.812	AN105738				
1.375	1.265	.688	AN105718	3.625	3.515	2.938	AN105739				
1.438	1.328	.750	AN105719	3.750	3.640	3.062	AN105740				
1.500	1.390	.812	AN105720	3.875	3.765	3.188	AN105741				
1.562	1.452	.875	AN105721	4.000	3.890	3.312	AN105742				
1.625	1.515	.938	AN105722	4.125	4.015	3.438	AN105743				
1.688	1.578	1.000	AN105723	4.250	4.140	3.562	AN105744				
1.750	1.640	1.062	AN105724	4.375	4.265	3.688	AN105745				

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .003 TIR PER INCH OF BODY LENGTH
(2) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD

MATERIAL CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS AS167
MANUFACTURING SPECIFICATION AMS 74 2
(4) INSPECTION ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES FRACTIONAL DIMENSIONS .010 ANGULAR DIMENSIONS 2°
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED JOINTLY BY THE AIR FORCE AND NAVY PROPELLER AND ACCESSORIES COMMITTEE OF THE SAE

APPROVED 18 JUL 49 REVISED (1) 22 MAY 51 (2) 31 AUG 54 (3) 27 DEC 65 (4) 17 JUNE 1966

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

AIR FORCE-NAVY AERONAUTICAL STANDARD

AN105701 THRU AN105800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.