DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

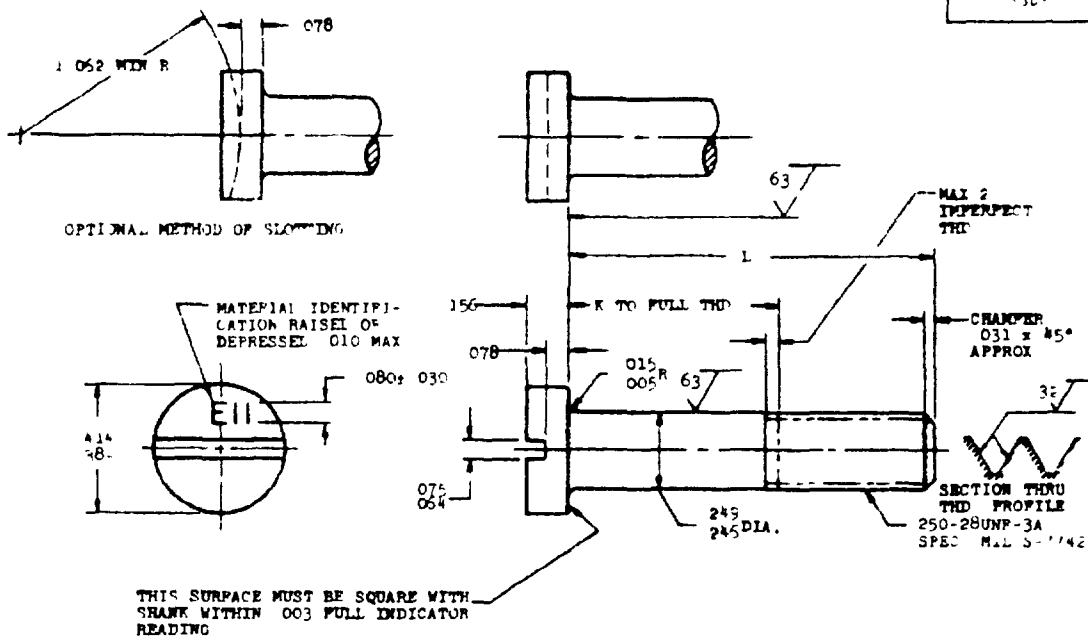

L	K +.000 -.060	PART NO	L	K +.000 -.060	PART NO	L	K +.000 -.060	PART NO
500	(a)	AN115455	1 250	625	AN115467	2 250	1 625	AN115479
562	(a)	AN115456	1 312	688	AN115468	2 375	1 750	AN115480
625	(a)	AN115457	1 375	750	AN115469	2 500	1 875	AN115481
688	(a)	AN115458	1 438	812	AN115470	2 625	2 000	AN115482
750	125	AN115459	1 500	875	AN115471	2 750	2 125	AN115483
812	188	AN115460	1 562	938	AN115472	2 875	2 250	AN115484
875	250	AN115461	1 625	1 000	AN115473	3 000	2 375	AN115485
938	312	AN115462	[illegible]	[illegible]	AN115474			
1 000	375	AN115463	1 750	1 125	AN115475			
1 062	438	AN115464	1 875	1 250	AN115476			
1 125	500	AN115465	2 000	1 375	AN115477			
1 188	562	AN115466	2 125	1 500	AN115478			

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED 005 FIR PER INCH OF SCREW LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE HEAD SHALL BE WITHIN 010 FIR

MATERIAL STEEL AMS 6322

HARDNESS ROCKWELL 35-5

FINISH CADMIUM PLATE AMS 7[illegible]

SURFACE ROUGHNESS [illegible]

MANUFACTURING SPECIFICATION AMS 7457

(3) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED TOLERANCES FINEAR DIMENSIONS ± 010

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER STANDARD PARTS COMMITTEE OF THE SAE

APPROVED 8 Jan 49 REVISED (1) 4 Dec 54 (2) 24 Jul 63 (3) 10 June 1965

P A
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

SCREW MACHINE - STEEL FLAT FILLISTER HEAD 250 28

AN115451 THRU AN115500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.