DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED SUP CLASS
53

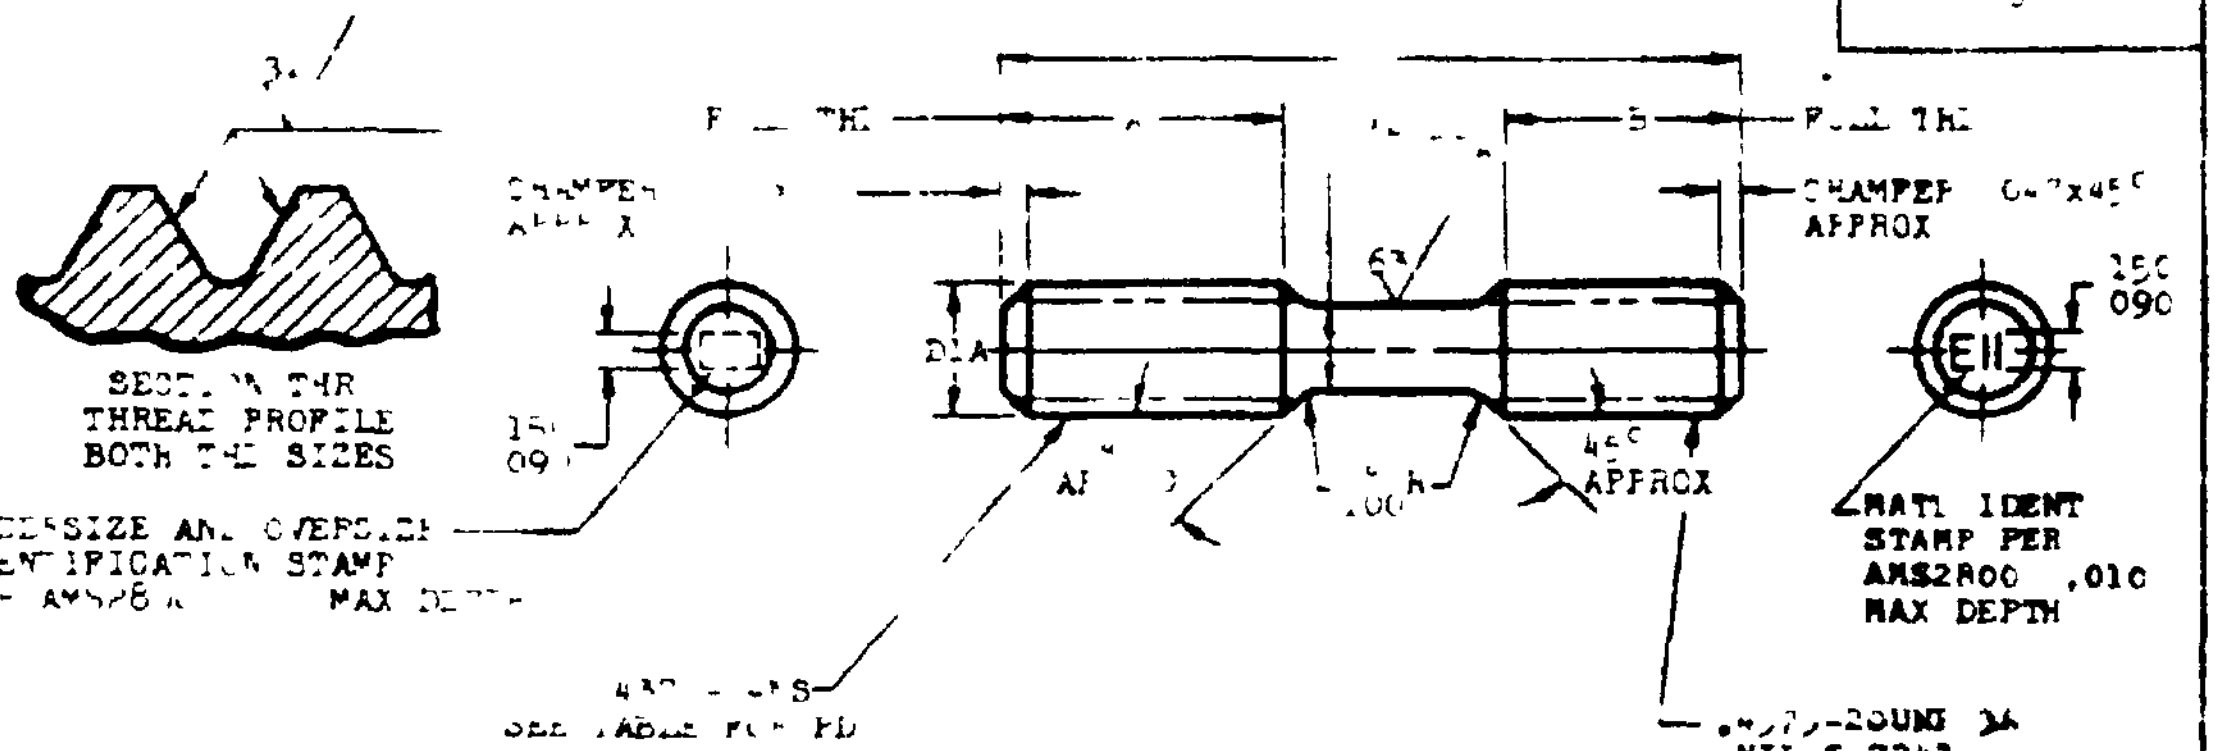

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003	STANDARD	+.003	+.006	+.009	+.012
			◎	◎	③	⑥	⑨	⑫
C			.433 - .438	.433 - .438	.433 - .438	.433 - .438	.442 - .447	.442 - .447
PD BEFORE PLATING			.3922 - .3937	.3952 - .3967	.3982 - .3997	.4012 - .4027	.4042 - .4057	.4077 - .4087
PD AFTER PLATING			.3932 - .3947	.3962 - .3977	.3992 - .4007	.4022 - .4037	.4052 - .4067	.4082 - .4097
PD LEAD THREAD			.3861 - .3881	.3891 - .3911	.3921 - .3941	.3951 - .3971	.3981 - .4001	.4011 - .4031
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.750	.57[illegible]	.625	AN127205	AN127206	AN127207	AN127208	AN127209	AN127210
1.812	.6[illegible]	.688	AN127211	AN127212	AN127213	AN127214	AN127215	AN127216
1.875	.875	.750	AN127217	AN127218	AN127219	AN127220	AN127221	AN127222
1.938	.875	.750	AN127223	AN127224	AN127225	AN127226	AN127227	AN127228
2.000	1.094	.625	AN127229	AN127230	AN127231	AN127232	AN127233	AN127234
2.062	1.094	.688	AN127235	AN127236	AN127237	AN127238	AN127239	AN127240
2.125	1.094	.750	AN127241	AN127242	AN127243	AN127244	AN127245	AN127246
2.188	1.094	.750	AN127247	AN127248	AN127249	AN127250	AN127251	AN127252
2.250	1.094	.750	AN127253	AN127254	AN127255	AN127256	AN127257	AN127258
2.312	1.094	.750	AN127259	AN127260	AN127261	AN127262	AN127263	AN127264
2.375	1.094	.750	AN127265	AN127266	AN127267	AN127268	AN127269	AN127270
2.438	1.094	.750	AN127271	AN127272	AN127273	AN127274	AN127275	AN127276
2.500	1.094	.750	AN127277	AN127278	AN127279	AN127280	AN127281	AN127282
2.562	1.094	.750	AN127283	AN127284	AN127285	AN127286	AN127287	AN127288
2.625	1.094	.750	AN127289	AN127290	AN127291	AN127292	AN127293	AN127294
2.750	1.094	.750	AN127295	AN127296	AN127297	AN127298	AN127299	AN127300
2.875	1.094	.750	AN127301	AN127302	AN127303	AN127304	AN127305	AN127306
3.000	1.094	.750	AN127307	AN127308	AN127309	AN127310	AN127311	AN127312
3.125	1.094	.750	AN127313	AN127314	AN127315	AN127316	AN127317	AN127318
3.250	1.094	.750	AN127319	AN127320	AN127321	AN127322	AN127323	AN127324
3.375	1.094	.750	AN127325	AN127326	AN127327	AN127328	AN127329	AN127330
3.500	1.094	.750	AN127331	AN127332	AN127333	AN127334	AN127335	AN127336
3.625	1.094	.750	AN127337	AN127338	AN127339	AN127340	AN127341	AN127342
3.750	1.094	.750	AN127343	AN127344	AN127345	AN127346	AN127347	AN127348
3.875	1.094	.750	AN127349	AN127350	AN127351	AN127352	AN127353	AN127354
4.000	1.594	.750	AN127355	AN127356	AN127357	AN127358	AN127359	AN127360
4.125	1.594	.750	AN127361	AN127362	AN127363	AN127364	AN127365	AN127366
4.250	1.594	.750	AN127367	AN127368	AN127369	AN127370	AN127371	AN127372
4.375	1.594	.750	AN127373	AN127374	AN127375	AN127376	AN127377	AN127378
4.500	1.594	.750	AN127379	AN127380	AN127381	AN127382	AN127383	AN127384
4.625	1.594	.750	AN127385	AN127386	AN127387	AN127388	AN127389	AN127390
4.750	1.594	.750	AN127391	AN127392	AN127393	AN127394	AN127395	AN127396
4.875	1.594	.750	AN127397	AN127398	AN127399	AN127400	AN127401	AN127402
5.000	1.594	.750	AN127403	AN127404	AN127405	AN127406	AN127407	AN127408
5.125	1.594	.750	AN127409	AN127410	AN127411	AN127412	AN127413	AN127414
5.250	1.594	.750	AN127415	AN127416	AN127417	AN127418	AN127419	AN127420
5.375	1.594	.750	AN127421	AN127422	AN127423	AN127424	AN127425	AN127426
5.500	1.594	.750	AN127427	AN127428	AN127429	AN127430	AN127431	AN127432

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960)
HARDNESS: ROCKWELL C26-32
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 74[illegible]
INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS 2640
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES: LINEAR DIMENSIONS ± .010
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 19 May 5[illegible] REVISED (1) 23 Jun 58 (2) 30 June 1986

PA 11
CUST: AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT - NECKED [illegible]

AN127193
THRU
AN127492

U.S. GOVERNMENT PRINTING OFFICE 1986 — 605 036/43950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.