FED. SUP CLASS
6640

REVIEW ACTIVITY: LM, GL, ME, 82

USER ACTIVITY: DH, DP, ME, ME, NM

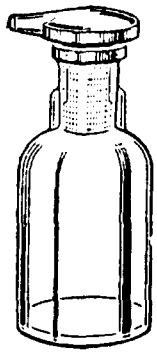

PART NUMBER	CAPACITY -0 to +5ml	COLOR
MS36286-1	60	AMBER
MS36286-2	60	CLEAR
MS36286-3	200	CLEAR

MATERIAL: Soda lime glass in accordance with Federal Specification DD-G-541, Type II.

DESIGN: The ground in, flat head stopper shall have two vertical channels, one for solution delivery and one as an air inlet, grooved into the side of the stopper and located 180 degrees apart. The spout of the stopper shall have a channel grooved into its under side, located at right angle to the vertical solution delivery channel.

The bottle neck shall have two channels formed on the inside and located 180 degrees apart.

With the stopper fitted so that its vertical channels are in line with channels in the bottle, a solution is delivered from the bottle, one drop at a time when the bottle is tilted. When the stopper is rotated to move the channels out of line, the bottle shall be sealed.

NOTES:
1. For design feature purposes, this standard takes precedence over procurement document referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-433-691/1842

APPROVED 18 JUN 1965 REVISED (A) 17 AUG 1970

(A) ENTIRE STANDARD REVISED

P.A. MU		TITLE	MILITARY STANDARD
Other Cust MS 82		BOTTLE, DROPPING, TK	MS36286
Procurement Specification NNN-B-1194		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 65 672 (Coordinated) EDITION OF 1 SEP 67 MAY BE USED.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.