FED. SUP CLASS
4730

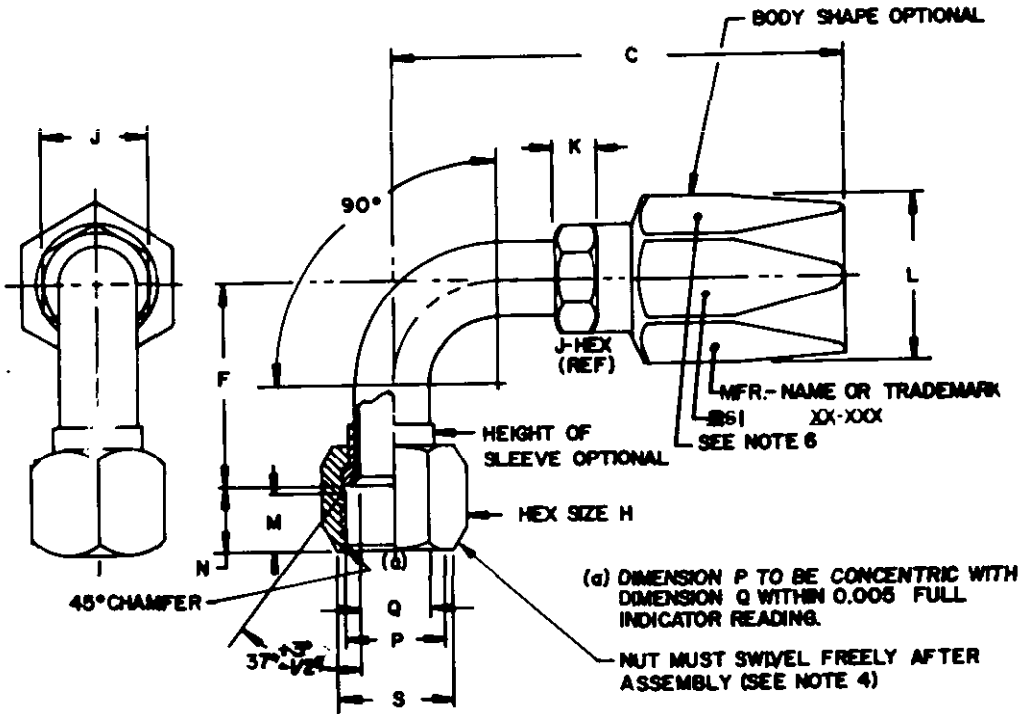

TABLE I.
DIMENSIONS FOR "7

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. REF	NOMINAL THREAD SIZE	H	K MIN	L MAX	.005 .000	Q MIN	C MAX	S MIN	F MAX	J MIN
-5	-4	1/4	1/2-20	.625	0.19		.378	.386	.156	2.67	.50	.83	.43
-6	-6	3/8	9/16-18	.688	0		.375	.435	.280	3.03	.56	.91	.50
-8	-8	1/2	3/4-16	.87		.375	.422	.570	.380	3.56	.75	1.15	.62
-10	-8	1/2	7/8-14			.20	.461	.500	.680	.380	3.78	.87	1.29	.75
-12	-12	3/4	1-1/16			1.59	.469	.563	.850	.600	4.28	1.06	1.55	.87

(A) CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-F-52525/7

REVIEW ACTIVITIES:
USER ACTIVITIES MU, WC, 63

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

(A) 25 October 1978

APPROVED 23 DECEMBER 1978

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE) HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37° FLARE, 90° BENT TUBE, SHORT DROP, SINGLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39345
PROCUREMENT SPECIFICATIONS MIL-C-52525 (ME)	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 (Stock—Ink)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5311