GGG-B-191a
INTERIM AMENDMENT-2
September 16, 1964
SUPERSEDING
GGG-B-191a
INTERIM AMENDMENT-1
November 18, 1963

INTERIM AMENDMENT

FEDERAL SPECIFICATION

BENDER, TUBE, HAND (PORTABLE)

This Interim Amendment was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized Federal agencies to use this Interim Amendment as a valid exception to Federal Specification GGG-B-191a, dated March 1, 1963.

Page 1, paragraph 1.2, under type I.- Worm-Gear actuated, multiple size: Add the following:

"Class 1. - Small radius bending.
Class 2. - Large radius bending".

Page 3, paragraph 3.12.1, seventh line: Delete "Table I" and substitute "The Applicable Table".

Page 3, Table I: Delete the title and substitute the following:

"Table I - Type I, class 1, tube bender, worm-gear actuated, multiple size, small radius bending".

Page 3, after Table I: Add the following as a new Figure 1:

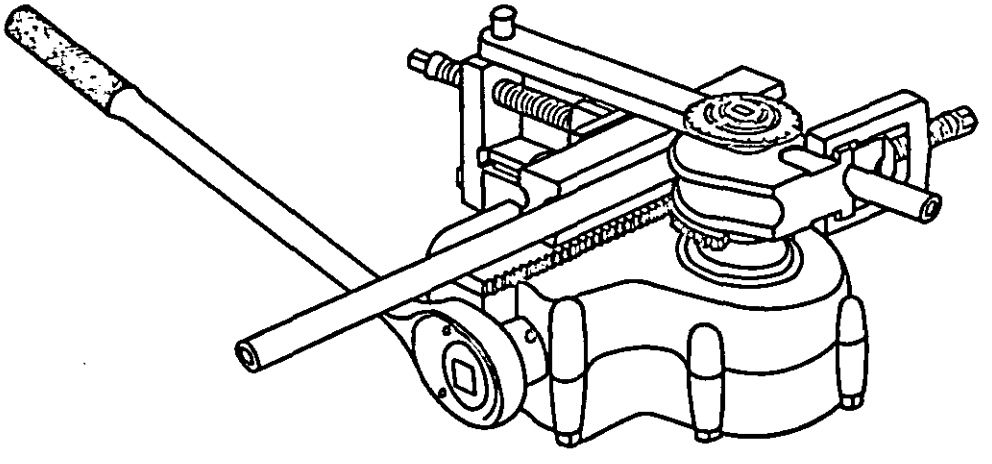


Figure 1. - Type I, class 1, tube bender, worm-gear actuated, multiple size, small radius bending.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

Page 4, paragraph 3.12.4, at end of paragraph: Delete "table I" and substitute "The applicable table".

Page 4, paragraph 3.12.5, line 5: Delete "8-1/2" and substitute "9-1/2".

Page 4, paragraph 3.12.8: Delete and substitute:

"3.12.8 Class 1, small radius bending.- Class 1 tube benders shall be furnished with all necessary parts for bending all nominal sizes of the tubing specified in table I. They shall conform to table I and shall be similar to figure 1".

Page 4, after paragraph 3.12.8: Add the following:

"3.12.9 Class 2, large radius bending.- Class 2 tube benders shall be furnished with all necessary parts for bending all nominal sizes of the tubing specified in table Ia. They shall conform to table Ia and shall be similar to figure 1a.

Table Ia - Type I, class 2, tube bender, worm-gear actuated, multiple, size, large radius bending.

Nominal outside diameter of tubing	Range of the nominal wall thickness of the tubing	Radius of bend measured to centerline of the tubing
		Plus 1/16 or minus 1/8
Inch	Inch	Inches
1/4	0.016 thru 0.049	3/4
5/16	.020 " .065	1
3/8	.028 " .083	1-1/4
1/2	.035 " .083	2
5/8	.042 " .083	2-1/2
3/4	.049 " .083	3

Page 4, figure 1: Delete the title and substitute the following:

"Figure 1a. - Type I, class 2, tube bender, worm-gear actuated multiple size, large radius bending".

Page 6, table III, last column: Delete and substitute the following:

Weight
Maximum
Pounds
3-1/2
5
9-1/2
16
16
16
16

Page 7, paragraph 3.14.1.1, third sentence: Delete and substitute the following: The benders shall be so designed that the tubing can be easily freed after bending.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.