GGG-C-315a
April 10, 1967

SUPERSEDING
Int. Fed. Spec. GGG-C-00315 (GSA-FSS)
April 29, 1964

FEDERAL SPECIFICATION

CHISEL, BRICK

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. One type of chisel generally used for cutting brick.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging Of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Alloy steel having good wear and shock resisting characteristics, or high carbon steel with 0.80 percent minimum carbon content.

3.2 Hardness. 48 through 58 on the Rockwell "C" scale; test as specified in 4.4.1.

3.3 Finish. Paint, enamel, or oil coat the body. Finish the taper on the work end with a surface finish equivalent to Roughness Height Average (RHA) 125 or finer. Chamfer the striking end neatly and uniformly.

3.4 Marking. Mark each chisel plainly and permanently with the manufacturer's name or with a trademark readily identifying the source of manufacture.

3.5 Size and shape. Handles having either hexagonal, or octagonal cross sections are

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the current version before use.

acceptable. Make chisels in accordance with the dimensions of, and similar to figure 1.

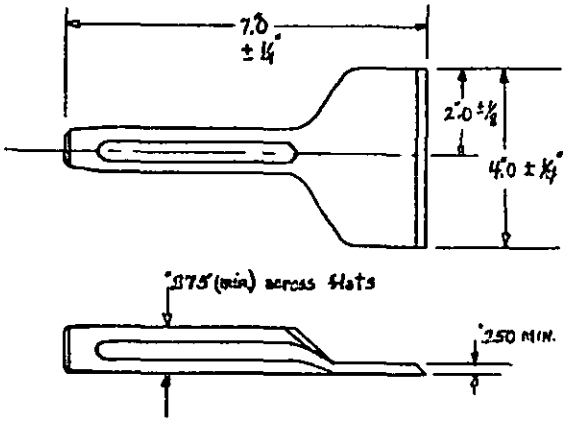


FIGURE 1. Chisel, brick.

3.6 Workmanship. Equal to the highest grade and in accordance with good commercial practices. Rust, fins, or any imperfections which may impair the serviceability or durability of the chisel are not acceptable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 Test each sample chisel in accordance with method 243 of Fed. Test Method Std. No. 151 for compliance with 3.2. Take hardness readings within 1/4 inch of work end and within 1/2 inch of striking end.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 ea.	S-4	1.5	Defects per hundred units	4.3.2
Testing	1 ea.	S-3	1.0	Percent defective	4.4.1
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table II. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE II. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the chisels shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C, and the level of packing A, B, or C, as specified (see 6.1). If level B packaging is required, see 6.2.

5.1.1 As part of the requirements of section 5 of this specification the following is considered as part of table I of MIL-H-15424.

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6
Chisel:					
Brick	P-1	1	6		4

5.2 Marking.

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the interior packaging and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military agencies.* In addition to markings required by the contract or order, the interior packaging and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options offered herein, and include the following information in procurement documents:

(*a*) Title, number, and date of this specification.

(*b*) Selection of applicable levels of preservation, packaging, and packing required (see 5.1).

6.2 For civil agency procurement. When level B packaging is required for civil agency procurements, the requirements in 5.1, level A packaging shall apply.

6.3 Illustration. The illustration shown is for the convenience of identification and is not intended to preclude the purchase of chisels which are otherwise in accordance with the requirements of this specification.

DOD coordination has been waived.

Preparing Activity:

GSA—FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the current version before use.