
FED. SUP CLASS
5975

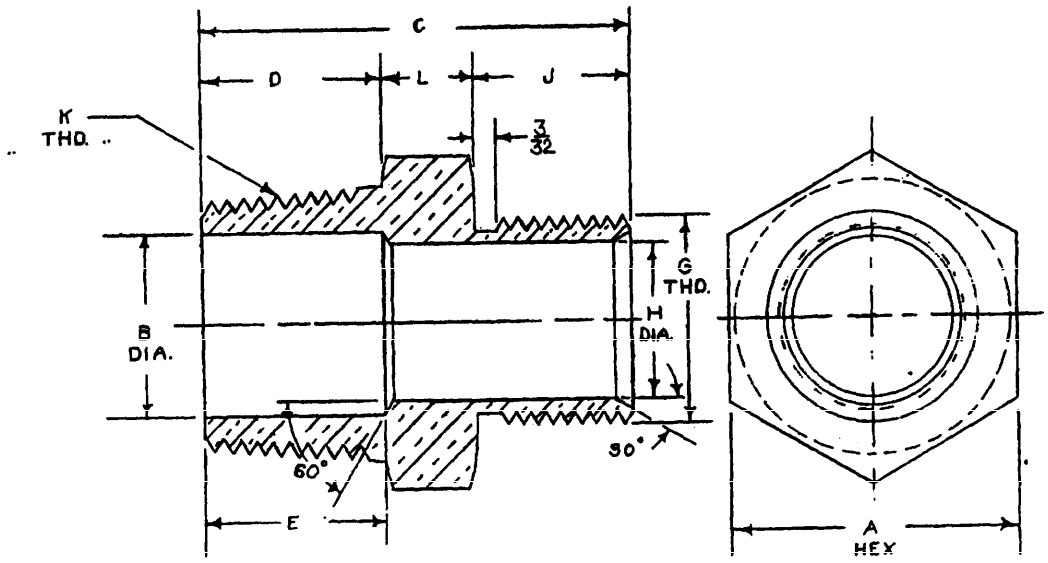

MS part number	Size AWG	A	B	C	D	E	G	H	J	K	L	FIIN
MS17034-1	14-1	5/8	0.406	1-13/32	21/32	5/8	1/2 - 20 NF - THD	0.277	1/2	1/4 - NPT	1/4	
MS17034-2	10-1	5/8	.406	1-13/32	21/32	3/4	1/2 - 20 NF - THD	.323	1/2	1/4 - NPT	1/4	
MS17034-3	4-0	1-1/8	.812	2	7/8	7/8	1 - 14 NF - THD	.785	3/4	3/4 - NPT	3/8	

REQUIREMENTS

1. All dimensions in inches.
2. Material shall be brass in accordance with Specification MIL-C-895.
3. Unless otherwise specified tolerances shall be ±1/64 on fractions and ±0.005 on decimals.
4. Tolerances on threads shall be held to class 2 fit.
5. This standard takes precedence over documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 7 JUL 1959 REVISED

P.A. Ships Other Cust	TITLE: FITTERS FOR SINGLE CONDUCTOR ELECTRIC TERMINAL (HERMETIC SEAL) FITTER ASSEMBLIES	MILITARY STANDARD MS 17034 (SHIPS)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1
DD FORM 1 SEP 57 672-1 N	LIMITED COORDINATION — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.	(Project 5975-0027Sh)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.