This standard has been approved by the San Antonio Air Material Area Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

REVIEW ACTIVITIES: DSA-IS

DD FORM 672-1 (Revised and Redesignated)

PROCUREMENT SPECIFICATION: NONE

P.A. AF-82 Other Cost


SUPERSEDES


TITLE: SEAL, PLAIN, RUBBER, (-65 TO +350 F FUEL RESISTANT) MOLD IN GROOVE

MILITARY STANDARD

MS27198

SHEET 1 OF 1

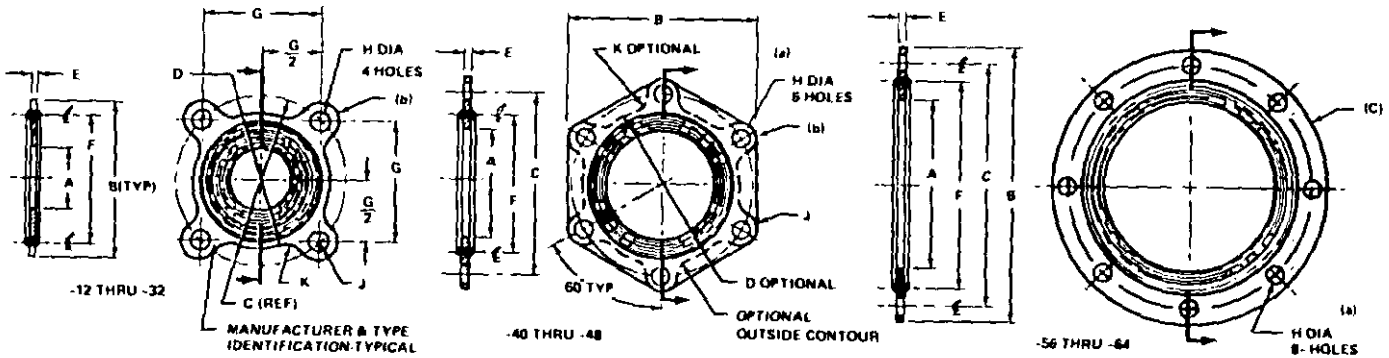

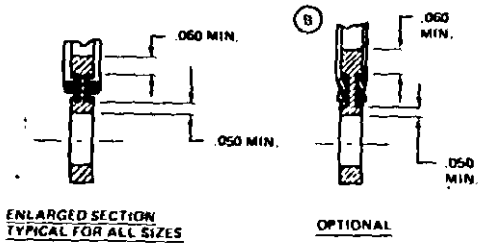

MS PART NO.	NOMINAL TUBE O.D. REF	A DIA	B	C DIA	D DIA	E ±.008	F DIA	G	H +.010 -.005 DIA	J RAD.	K RAD.
MS -12	3/4	.669	1-19/32	1.635	1-1/4	.092	61/64	1.156	.205	7/32	7/32
MS -12 -16	3/4	.669	1-3/4	1.856	1-1/2	.092	1-13/64	1.312	.205	7/32	7/32
MS -16	1	.904	1-3/4	1.856	1-1/2	.092	1-13/64	1.312	.205	7/32	7/32
MS -16 -24	1	.904	2 3/8	2.563	2-1/8	.092	1 47/64	1.812	.266	9/32	9/32
MS -20	1-1/4	1.138	2 3/16	2.342	1-27/32	.092	1-1/2	1.656	.266	17/64	17/64
MS -20 -24	1-1/4	1.138	2-3/8	2.563	2-1/8	.092	1 47/64	1.812	.266	9/32	9/32
MS -24	1-1/2	1.372	2-3/8	2.563	2-1/8	.092	1 47/64	1.812	.266	9/32	9/32
MS -32	2	1.841	3	3.350	2-3/4	.092	2-13/32	2.375	.328	5/16	5/16
MS -40	2-1/2	2.341	4	3.812	3-1/4*	.092	2 53/64		.328	3/8	3/8*
MS -48	3	2.841	4-1/2	4.312	3-3/4*	.092	3 5/16		.328	5/8	3/8*
MS -56	3-1/2	3.341	5 9/16	4.875		.092	3-13/16		.328		
MS -64	4	3.841	6-1/8	5.438		.092	4 5/16		.328		

(a) H DIAMETER HOLES MUST BE EQUALLY SPACED ON C DIAMETER WITHIN .005.
(b) COLOR MARKINGS: NONE

(c) COLOR MARKINGS: NONE

MATERIAL: METAL RETAINER, CORROSION RESISTANT STEEL, SPEC. MIL-S 5059, COMP. 302 ANNEALED
RUBBER SEAL; RUBBER PER SPEC. MIL-R-25988, MOLDED SHAPE FORM.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; DECIMALS ± .005, FRACTIONS ± 1/64, ANGLES ± 1/2°.
INDIVIDUALLY PACKAGED PER SPEC. MIL-P-116, METHOD 1C-1.
PRODUCT SHALL BE PERMANENTLY IDENTIFIED AS TO MANUFACTURER AND TYPE.
SEAL DESIGN MUST PROVIDE SUBSTANTIAL FILLING OF THE GROOVE WHEN ASSEMBLED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
* SUGGESTED DIMENSIONS FOR "D" AND "K" SIZES (-40 THRU -48).

FED. SUP CLASS 5330

APPROVED 20 JULY 1967 REVISED (A) 5 JAN 1985 (B) 9 JUNE 1972

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION (Of submitter) | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 1541B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.