

FED. SUP CLASS
5340

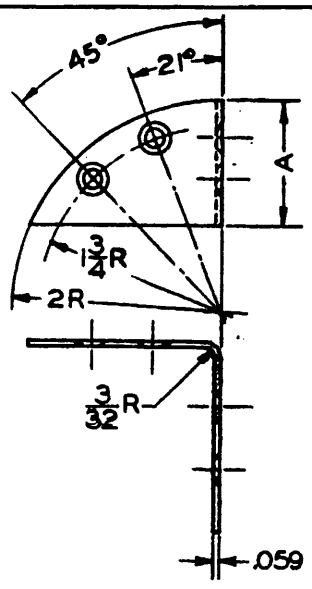



C-COUNTERSINK — B-DIA 4-HOLES

FINISH: BRASS - PLAIN

STEEL-ZINC PLATED CLASS 2 , TYPE III PER FEDERAL SPECIFICATION QQ-Z-325

OR CADMIUM PLATED TYPE III, CLASS 1 PER FEDERAL SPECIFICATION QQ-P-416

MS PART NO.	DIMENSIONS A LENGTH	B DIA	C COUNTERSINK	MATERIAL AND SPECIFICATION	
MS35261-1	1 3/16	.180	82° TO 21/64 +1/64 DIA	BRASS PER FED SPEC QQ-B-613 COMPOSITION 2 HALF HARD	A1
MS35261-2	1 3/16	.180	NONE		
MS35261-3	1 3/16	.152	82° TO 9/32 +1/64 DIA		
MS35261-4	1 3/16	.152	NONE		
MS35261-5	1 3/16	.180	82° TO 21/64 +1/64 DIA	STEEL PER FED SPEC QQ-S-698 COLD ROLLED COMMERCIAL QUALITY NO. 2 TEMPER NO. 1 FINISH	A2
MS35261-6	1 3/16	.180	NONE		
MS35261-7	1 3/16	.152	82° TO 9/32 +1/64 DIA		
MS35261-8	1 3/16	.152	NONE		

TOLERANCES ON FRACTIONS ±1/64, ON DECIMALS ±.005, ON ANGLES ±1°, UNLESS OTHERWISE SPECIFIED.

ALL DIMENSIONS IN INCHES

APPROVED 19 JUNE 1963 REVISED (A) 2 Nov 67

P.A.	TITLE	MILITARY STANDARD
Other Cust EL YD 82	BRACE, CORNER, BOX 2 QUARTER-ELLIPSE FLANGES, 4 MOUNTING HOLES	MS35261
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 19 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5340-0701

Reviewer/user information is current as of the date on this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF 82/85/ Army EL/ Navy YD/

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.