



FED. SUP CLASS
2540

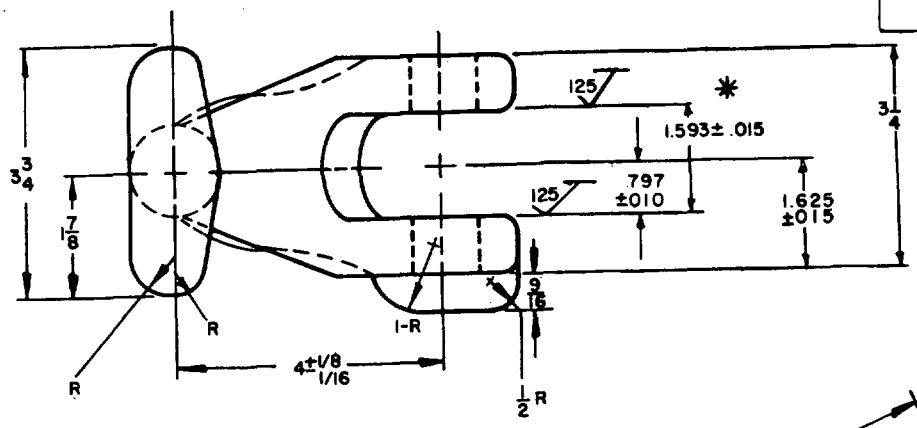

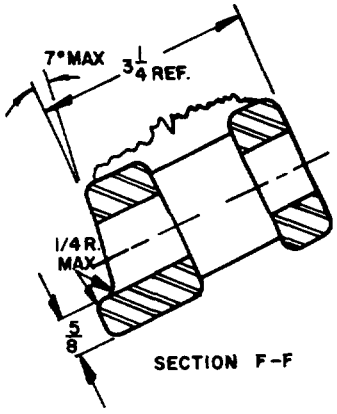

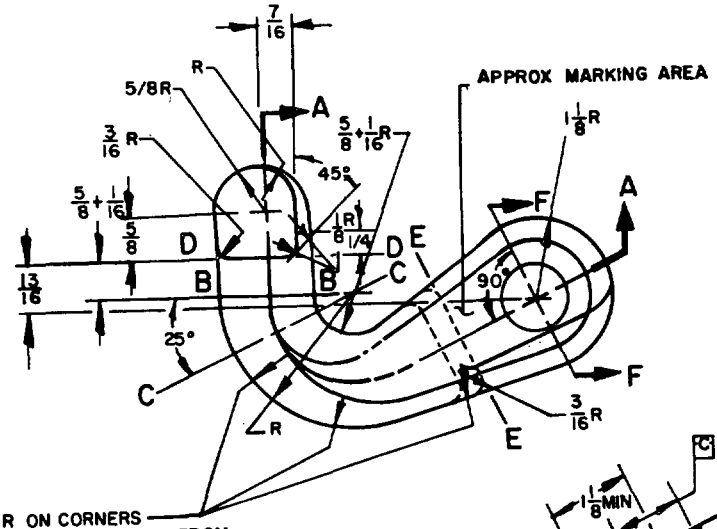

R ON CORNERS CHANGES EVENLY FROM 1/4 AT DATUM PLANE E-E TO 11/16 AT TANGENCY WITH 5/8 R STRUCK FROM DATUM PLANE C-C

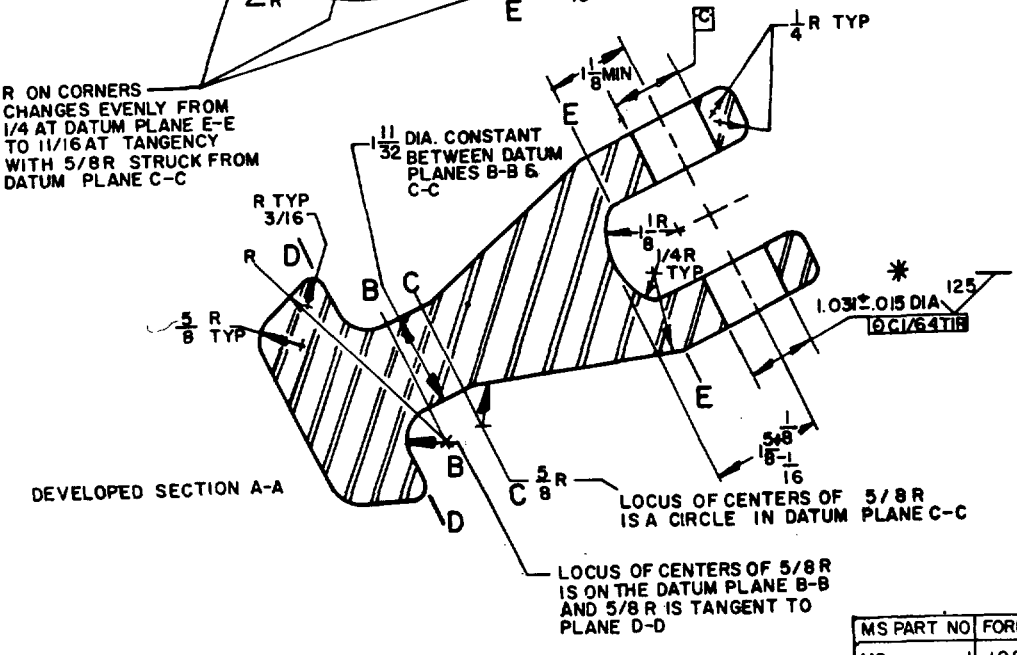

MS PART NO	FORMER PART NO
MS -1	10861607

(A) FOR CHANGES SEE SHEET 2

P.A. AT Other Cust	TITLE: HOOK, TOWING: LIGHT (FOR VEHICLES 8 TO 15 TONS)	MILITARY STANDARD MS 500039
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

APPROVED 7 MARCH 1966 REVISED (A) 16 Feb 1978

USER ACTIVITY: ARMY- EA; NAVY-MC

This military standard is approved for use by the U.S. Army Tank-Automotive Material Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

2540-0266

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2540

REQUIREMENTS:

(A) 1. MATERIAL: STEEL, ALLOY, FORGING; 4140 TO 4150, 4337, 4340, 5140 TO 5150, 8640 TO 8650, 8740 & 8742, GRADE D SPEC. MIL-S-46172.

2. HEAT TREAT: QUENCH AND TEMPER TO ROCKWELL C 28-35.

(A) 3. PROTECTIVE FINISH: TREAT SPEC. TT-C-490, TYPE I OR III. PRIME, SPEC. TT-P-636.
ENAMEL: FOREST GREEN, SPEC. MIL-E-52798 OR MIL-E-52835.

4. DIMENSIONS ARE IN INCHES AND UNLESS OTHERWISE SPECIFIED THE FOLLOWING SHALL APPLY:
DRAFT ANGLE 7° MAX: FORGING TOLERANCE ± 1/16.

(A) 5. RECYCLED MATERIALS. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

NOTES:

(A) 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

3. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATIONS IN ACCORDANCE WITH MIL-STD-130.

4. CERTAIN DIMENSIONS MARKED * ON SHEET 1 ARE CONGRUENT WITH CORRESPONDING DIMENSIONS FOR THE TOWING LUGS TABULATED ON MS500004 WHICH REFLECTS THE REQUIREMENTS OF STANDARDIZATION AGREEMENT NORTH ATLANTIC TREATY ORGANIZATION 4019 AND AMERICAN, BRITISH, CANADIAN-ARMY-STD-132.

APPROVED 7 MARCH 1966 REVISED (A) 16 Feb 1978

MS PART NO.	FORMER PART NO.
MS -1	10861607

P.A. AT Other Cust	TITLE HOOK, TOWING: LIGHT (FOR VEHICLES 8 TO 15 TONS)	MILITARY STANDARD MS 500039
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) *PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2540-0266

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:45Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/1241