FED SUP CLASS
5306

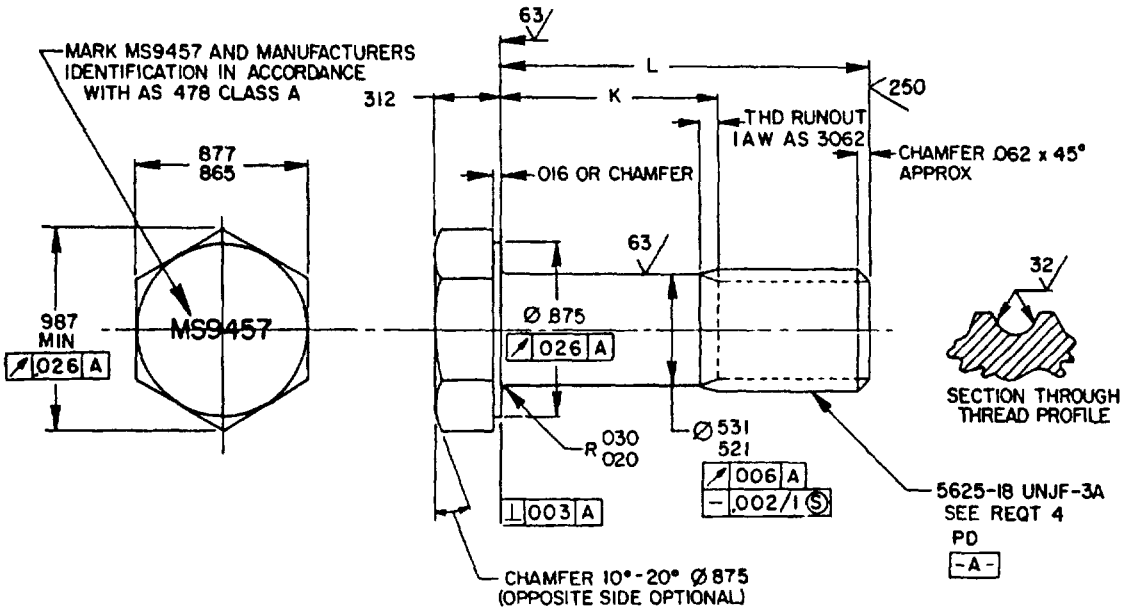


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	.875	.114- 134	10 18
-05	.938	.114- 134	10 56
-06	1.000	.114- 134	11.94
-07	1.062	.114- 134	12 32
-08	1.125	.114- 134	12 70
-09	1 188	114- 134	13 08
-10	1.250	.114- 134	13 47
-11	1.312	114- .134	13 85
-12	1.375	114- .134	14 23
-13	1.438	.114- 134	14 62
-14	1.500	.114- .134	15 00
-15	1 562	128- 188	15 38
-16	1.625	.190- .250	15 77
-17	1 688	.252- 312	16 15
-18	1.750	.315- .375	16 53
-19	1.812	.378- .438	16.91
-20	1.875	440- 500	17.30
-21	2 000	565- .625	18 06
-22	2.125	690- 750	18 83
-23	2.250	.815- 875	19 06
-24	2.375	940-1 000	20 36
-25	2 500	1.065-1.125	21 13
-26	2.625	1 190-1 250	21 90
-27	2 750	1 315-1 375	22 66
-28	2.875	1 440-1 500	23 43
-29	3 000	1 565-1 625	24 19
-30	3 125	1 690-1 750	24 96
-31	3 250	1.815-1 875	25 73
-32	3 375	1 940-2 000	26 49
-33	3 500	2 065-2 125	27.26
-34	3 625	2 190-2.250	28 02
-35	3 750	2 315-2 375	28.79
-36	3 875	2 440-2 500	29 56
-37	4 000	2 565-2 625	30.32
-38	4 125	2 690-2 750	31 09
-39	4.250	2.815-2 875	31.86
-40	4 375	2 940-3 000	32 62
-41	4.500	3 065-3 125	33 39
-42	4 625	3.190-3 250	34 15
-43	4.750	3 315-3 375	34.92
-44	4 875	3 440-3 500	35.69
-45	5.000	3.565-3.625	36.45
-46	5 125	3 690-3 750	37.22
-47	5 250	3.815-3 875	37 99
-48	5.375	3 940-4 000	38.75
-49	5.500	4.065-4.125	39.52
-50	5 625	4.190-4.250	40 28
-51	5.750	4 315-4 375	41.05
-52	5 875	4 440-4 500	41 82
-53	6.000	4 565-4.625	42 58

Ⓐ ENTIRE STANDARD REVISED

P A. NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, HEXAGON HEAD, STEEL, .5625-18 UNJF-3A	MILITARY STANDARD MS9457
PROCUREMENT SPECIFICATION	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0979

APPROVED 21 DEC 62 REVISED Ⓐ 31 MAR 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for expenditure use shall be made from this document when applicable

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: STEEL, IN ACCORDANCE WITH AMS 6304

2. PROTECTIVE COATING AND SURFACE TREATMENT: DIFFUSED NICKEL-CADMIUM PLATE IN ACCORDANCE WTIH AMS 2416 DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED 0012 MAXIMUM BEFORE PLATING.

3. HARDNESS: RC42-46 MAXIMUM.

4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.

5. MANUFACTURING: MANUFACTURING IN ACCORDANCE WITH AMS 7455-80. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH AMS 2640-83 BEFORE PLATING.

6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M.

7. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH AS 291-64; UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.

8. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478-79 CLASS A

9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9457-04

- MS9457 — BASIC MS NUMBER
- -04 — DASH NUMBER

MS9457-04 INDICATES: BOLT, MACHINE-STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, HEXAGON HEAD, .5625-18 UNJF-3A, LENGTH .875.

NOTES:

1. ALL DIMENSIONS IN INCHES.

2. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm$.010, ANGULAR DIMENSIONS $\pm 5^{o}$.

3. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

4. DO NOT USE UNASSIGNED PART NUMBERS.

5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

6. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

7. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

8. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 21 DEC 62 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for ... new engineering and design applications and for repetitive use shall be made from this document

P A: NAVY-AS; Other Cust: AIR FORCE-11	INTERNATIONAL INTEREST	TITLE: BOLT, MACHINE, HEXAGON HEAD, STEEL, .5625-18 UNJF-3A	MILITARY STANDARD MS 9457
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.