FED SUP CLASS
5306

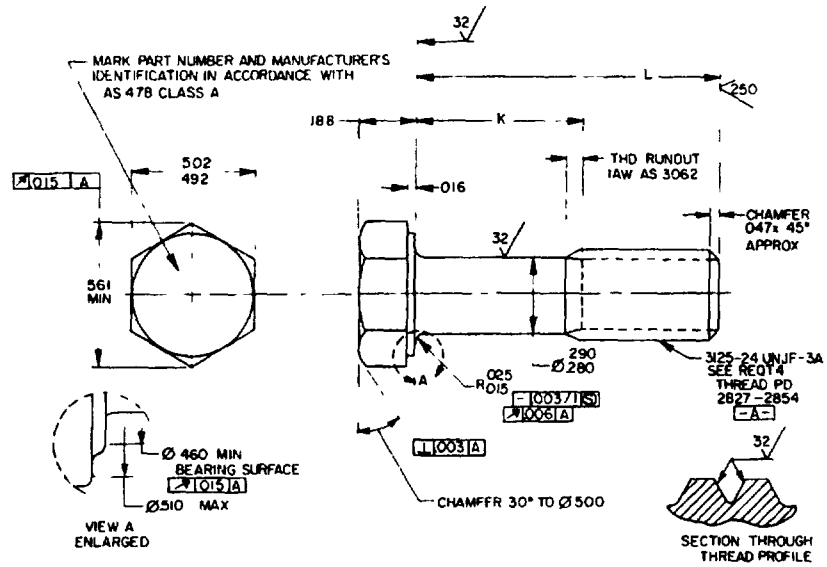


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	500	088- 108	2 05
-05	562	088- 108	2.16
-06	625	088- 108	2 27
-07	688	088- 108	2.38
-08	750	088- 108	2 49
-09	.812	088- 108	2 60
-10	875	088- 108	2 72
-11	938	088- 108	2 83
-12	1 000	088- 125	2 94
-13	1.062	128- 188	3 06
-14	1 125	190- 250	3 17
-15	1 188	253- 313	3.28
-16	1 250	315- 375	3 39
-17	1 312	377- 437	3.51
-18	1 375	440- 500	3.62
-19	1 438	503- 563	3 73
-20	1 500	565- 625	3 85
-21	1 562	627- 687	3 96
-22	1 625	690- 750	4 07
-23	1 688	753- 813	4 18
-24	1.750	815- 875	4 30
-25	1 875	940-1 000	4 52
-26	2.000	1.065-1 125	4.75
-27	2 125	1 190-1 250	4 97
-28	2.250	1 315-1 375	5 20
-29	2 375	1.440-1.500	5 43
-30	2.500	1 565-1.625	5 65

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-31	2 625	1 690-1.750	5 88
-32	2 750	1.815-1 875	6 10
-33	2.875	1 940-2 000	6.33
-34	3 000	2 065-2 125	6.55
-35	3 125	2 190-2 250	6.78
-36	3 250	2 315-2 375	7.01
-37	3 375	2 440-2 500	7.23
-38	3 500	2 565-2 625	7 46
-39	3 625	2 690-2 750	7 68
-40	3 750	2 815-2 875	7 91
-41	3 875	2 940-3 000	8 13
-42	4 000	3 065-3.125	8.36
-43	4 125	3 190-3 250	8 59
-44	4 250	3.315-3.375	8 81
-45	4 375	3 440-3.500	9 04
-46	4.500	3.565-3 625	9 26
-47	4 625	3 690-3 750	9 49
-48	4 750	3 815-3 875	9 71
-49	4 875	3 940-4 000	9 94
-50	5 000	4.065-4 125	10 17
-51	5 125	4 190-4 250	10 39
-52	5.250	4 315-4 375	10.62
-53	5 375	4 440-4.500	10 84
-54	5 500	4 565-4 625	11.07
-55	5 625	4 690-4 750	11 29
-56	5 750	4 815-4.875	11 52
-57	5.875	4 940-5 000	11.74
-58	6 000	5 065-5 125	11 97

Ⓐ ENTIRE STANDARD REVISED

APPROVED 2 FEB 68 REVISED Ⓐ 22 MAY 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .3125-24 UNJF-3A	MILITARY STANDARD MS9520
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0984

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: IN ACCORDANCE WITH AMS 6322-80.
2. PROTECTIVE COATING AND SURFACE TREATMENT. CADMIUM PLATE IN ACCORDANCE WTIH AMS 2400-80 DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. HARDNESS: 26-32 HRC
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879
5. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M
7. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -14 AND SMALLER
8. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm$ 010, ANGULAR DIMENSIONS $\pm 5^{\circ}$
9. MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83
10. EDGES BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
11. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9520-04



MS9520-04 INDICATES - BOLT, MACHINE, HEXAGON HEAD, 3125-24 UNJF-3A, LENGTH 500

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS

APPROVED 2 FEB 68 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES.

REVIEWER ACTIVITIES.
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-AV AIR FORCE-99		BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .3125-24 UNJF-3A	MS9520
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0984

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.