MIL-H-52471/4A
31 July 1987
SUPERSEDING
MIL-H-52471/4
16 October 1978

MILITARY SPECIFICATION SHEET

HOSE, RUBBER: HYDRAULIC PRESSURE-TYPE;

TYPE 100R1 SINGLE-WIRE-BRAID

REINFORCEMENT HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the hose described herein shall consist of this document and the latest issue of specification MIL-H-52471.

REQUIREMENTS:

1. The hose shall be in accordance with tables I and II, figure 1, and as specified herein.

2. Inside and outside diameters are measured at least 2 inches from the end.

3. This hose must be listed on QPL-52471.

AMSC N/A FSC 4720

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R1 hose.

Nominal hose size I.D.	Dash number	A Inner tube					
		Inside diameter		I.D. tolerance			
		inch	mm	inch		mm	
1/4	-4	0.250	6.4	+0.023	-0.008	+0.6	-0.2
3/8	-6	0.375	9.5	+0.023	-0.008	+0.6	-0.2
1/2	-8	0.005	12.7	+0.031	-0.015	+0.8	-0.4
3/4	- 12	0.750	19.0	+0.031	-0.015	+0.8	-0.4
1	- 16	1.000	25.4	+0.040	-0.015	+1.0	-0.4
1-1/4	- 20	1.250	31.8	+0.047	-0.015	+1.2	-0.4
1-1/2	- 24	1.500	38.1	+0.047	-0.015	+1.2	-0.4
2	- 32	2.000	50.8	+0.047	-0.015	+1.2	-0.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R1 hose. (continued)

Nominal hose size I.D.	Dash number	B Cover				B Cover alternate	
		Maximum Outside diameter		Minimum Outside diameter		Maximum Outside diameter	
		inch	mm	inch	mm	inch	mm
1/4	-4	0.656	16.7	0.594	15.1	0.557	14.1
3/8	-6	0.812	20.6	0.750	19.0	0.713	18.1
1/2	-8	0.938	23.8	0.875	22.2	0.846	21.5
3/4	-12	1.219	31.0	1.156	29.4	1.127	28.6
1	-16	1.547	39.3	1.453	36.9	1.440	36.6
1-1/4	-20	1.875	47.6	1.750	44.4	1.766	44.8
1-1/2	-24	2.125	54.0	2.000	50.8	2.047	52.0
2	-32	2.688	68.3	2.562	65.1	2.594	65.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R1 hose. (continued)

Nominal hose size I.D.	Dash number	C Wire reinforcement				T Alternate cover thickness range			
		Maximum Outside diameter		Minimum Outside diameter		Maximum		Minimum	
		inch	mm	inch	mm	inch	mm	inch	mm
1/4	-4	0.461	11.7	0.416	10.6	0.060	1.52	0.030	0.76
3/8	-6	0.617	15.7	0.571	14.5	0.060	1.52	0.030	0.76
1/2	-8	0.750	19.0	0.688	17.5	0.060	1.52	0.030	0.76
3/4	-12	1.031	26.2	0.969	24.6	0.060	1.52	0.030	0.76
1	-16	1.344	34.1	1.281	32.5	0.060	1.52	0.030	0.76
1-1/4	-20	1.641	41.7	1.547	39.3	0.080	2.03	0.040	1.02
1-1/2	-24	1.891	48.0	1.797	45.6	0.100	2.54	0.050	1.27
2	-32	2.438	61.9	2.312	58.7	0.100	2.54	0.050	1.27

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R1 hose. (continued)

Nominal hose size I.D.	Dash number	Maximum working pressure	
		psi	MPa
1/4	-4	2750	19.0
3/8	-6	2250	15.5
1/2	-8	2000	13.8
3/4	-12	1250	8.6
1	-16	1000	6.9
1-1/4	-20	625	4.3
1-1/2	-24	500	3.4
2	-32	375	2.6


TABLE II. Concentricity.

Nominal hose I.D.	Concentricity (FIR) between			
	Tube I.D. (A) and cover O.D. (B)		Tube I.D. (A) and reinforcement O.D. (C)	
inch	inch	mm	inch	mm
1/4	0.030	0.8	0.017	0.4
3/8, 1/2, 3/4	0.040	1.0	0.024	0.6
1, 1-1/4, 1-1/2, 2	0.050	1.3	0.031	0.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

CATALOGING DATA: The Military specification part number is a definitive part number which corresponds to the size of hoses covered by this specification sheet. The specification sheet number and the size dash number are combined to form a definitive military specification part number.

EXAMPLE:



Custodian:
Army - ME


Preparing activity:
Army - ME

Review activities:
Army - GL
DLA - CS

Project 4720-0628

User activity:
Army - AR
Navy - SH
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

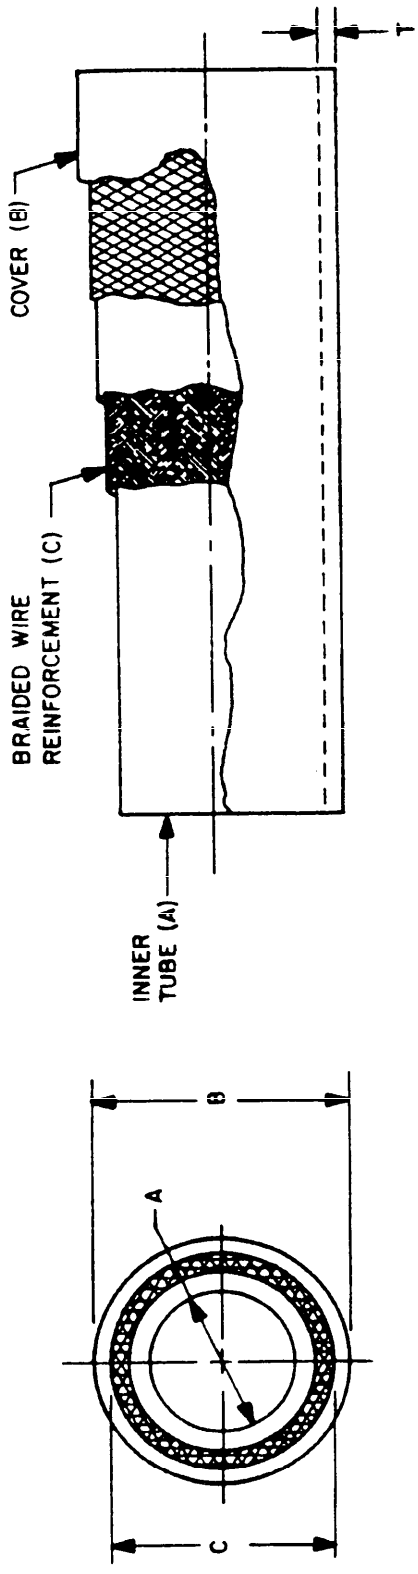

X-3394

FIGURE 1. Hose : Type 100RI, single wire braid reinforcement.

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036/74709

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.