METRIC

DOD –W-63546/8
W/AMENDMENT 1
23 March 2005

MILITARY SPECIFICATION SHEET


WASHER, CONCAVE AND WASHER CONVEX
(SPHERICAL SET), STEEL, METRIC

Inactive for new design after 1 October 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the washers described herein shall consist of this specification and DOD-W-63546.

WASHER, CONVEX

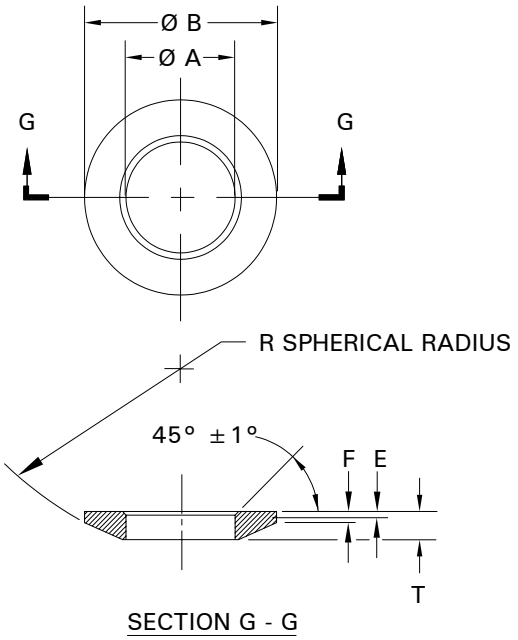

SECTION G - G

WASHER, CONCAVE

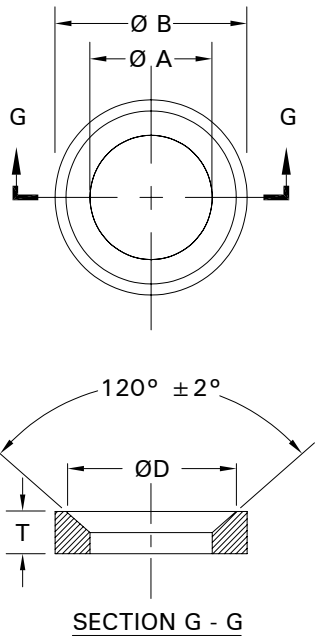

SECTION G - G

NOTES:

1. All dimensions are in millimeters.
2. Remove all burrs and sharp edges.

FIGURE 1. WASHER, CONCAVE AND WASHER CONVEX (SPHERICAL SET), STEEL, METRIC.

AMSC N/A FSC 5310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Steel, carbon, composition 1010 to 1020 (UNS G10100 thru UNS G10200).


2. Heat treatment: Case harden total case depth 0.2 mm minimum.

3. Hardness: Surface hardness shall be 88 HR15N maximum, in accordance with ASTM E18.

4. Protective coating and finish. Plain (uncoated) or cadmium plated in accordance with SAE-AMS-QQ-P-416, Type II, Class 2 or zinc coated in accordance with ASTM B633, Type II, Fe/Zn 13 (see Requirement 5 herein).

5. Part number: The part number shall consist of the letter "D", the basic number of the specification sheet, a dash number from Table I or Table II and finish code letter as applicable.

Example: D63546/8 – 01 P

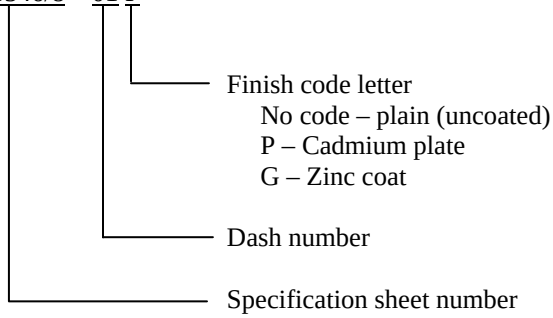

D63546/8 – 01P Indicates: Washer, convex, steel, metric, 6.4 mm I.D, and 12 mm OD., cadmium plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS FOR CONVEX.

DASH NUMBER	ØA ID		ØB OD		E		F		T THICKNESS		R SPHERICAL RADIUS	
		TOL		TOL		TOL		TOL		TOL		TOL
01	6.4	+.15 0	12	0 -.18	0.3	±.01	0.7	± .05	2.3	± 0.3	9	±.5
02	8.4	+.15 0	17	0 -.18	0.5		0.6	± .05	3.2		12	
03	10.5	+.18 0	21	0 -.21	0.5		0.8	± .05	4		15	
04	13	+.18 0	24	0 -.21	0.5		1.1	± .10	4.6		17	
05	17	+.18 0	30	0 -.25	0.5		1.3	± .20	5.3		22	
06	21	+.21 0	36	0 -.25	0.5		2		6.3		27	
07	25	+.21 0	44	0 -.25	0.8	±.05	2.4		8.2		32	
08	31	+.25 0	56	0 -.30	0.8		3.6		11.2		41	
09	37	+.25 0	68	0 -.30	1		4.6		14		50	
10	43	+.25 0	78	0 -.30	1		6.5		17		58	
11	50	+.25 0	92	0 -.35	1		8		21		67	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

TABLE II. DASH NUMBERS AND DIMENSIONS FOR CONCAVE.

DASH NUMBER	ØA ID		ØB OD		T THICKNESS		D	
		TOL		TOL		TOL		TOL
21	7.1	+.15 0	12	0 -.18	2.8		11	+.18 0
22	9.6	+.15 0	17	0 -.18	3.5		14.5	+.18 0
23	12	+.18 0	21	0 -.21	4.2		18.5	+.21 0
24	14.2	+.18 0	24	0 -.21	5		20	+.21 0
25	19	+.21 0	30	0 -.25	6.2		26	+.21 0
26	23.2	+.21 0	36	0 -.25	7.5	± 0.3	31	+.25 0
27	28	+.21 0	44	0 -.25	9.5		37	+.25 0
28	35	+.25 0	56	0 -.30	12		49	+.25 0
29	42	+.25 0	68	0 -.30	15		60	+.30 0
30	49	+.25 0	78	0 -.30	18		70	+.30 0
31	56	+.30 0	92	0 -.35	22		82	+.35 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

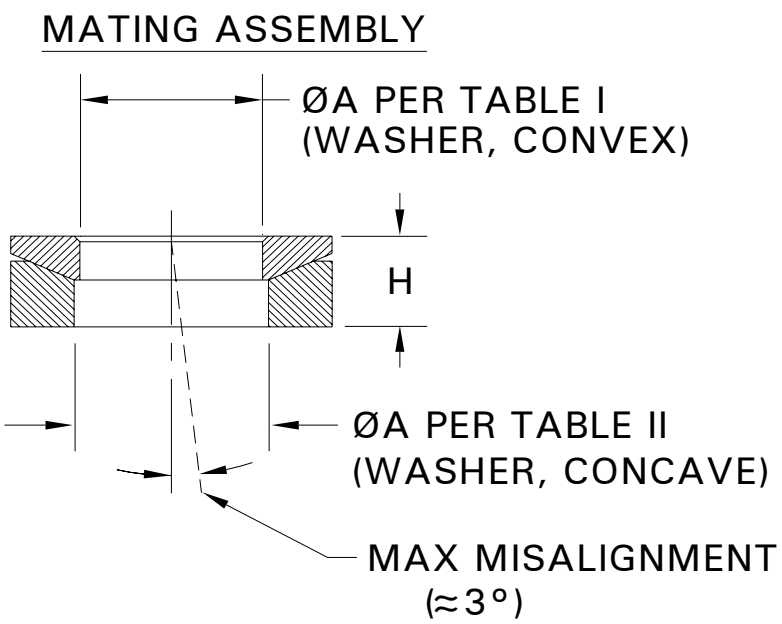


FIGURE 2. MATING ASSEMBLY.

TABLE III. MATING DIMENSIONS.

DASH NUMBER Ø A CONVEX	DASH NUMBER Ø A CONCAVE	H ASSEMBLY HEIGHT FOR MISALIGNMENT 0º (REF)
01	21	4
02	22	5
03	23	6.3
04	24	8
05	25	9.3
06	26	11.5
07	27	15
08	28	19.7
09	29	23
10	30	29
11	31	36

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army – AR
Navy – OS

Preparing activity:
DLA – IS

Review activities:
Army – AT, AV, MI
Navy – MC, SH
NSA – NS

(Project 5310-2720)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.