A-A-51194
February 15, 1991

COMMERCIAL ITEM DESCRIPTION

PRESS, "H" FRAME, HYDRAULIC, HAND OPERATED, NON ROLL BED

The General Services Administration has authorized the use of this commercial item description in preference to MIL-P-80261, type III, class 2, style A.

Abstract. This description covers hand operated hydraulic "H" frame presses with a non roll bed, which are used in maintenance and repair shops to press, straighten, and to assemble and disassemble parts.

Classification. The press shall be of one type and one style. The size to be furnished shall be as specified (see ordering data). The size and capacities shall conform to table I.

Salient characteristics.

1. Frame. The frame shall be of the "H" type, fabricated of steel sections. The headrail shall support the hydraulic cylinder and ram assembly.

2. Hydraulic system. The press hydraulic system shall consist of a hand operated pump, fluid reservoir, a cylinder with ram, and the necessary fittings and hoses to ensure a complete hydraulic system. The system shall have overload protection and a means of preventing extension of the ram beyond its normal end-of-stroke position. A pressure gauge calibrated to read tons of ram force shall be provided.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis TN 38114-5051.

AMSC N/A FSC 3444

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

TABLE I. Sizes and capacities.

Size	Rated tonnage	Width between siderails	Width between table channel	Distance ram nose to table	Vertical travel table or headrail	Ram stroke
17	17	20	5	34	35	2
20	20	24	5	37	34	2
25	25	24	5	39	35	14
30	30	28	6	32	35	5
40	40	28	7	40	36	5
50	50	28	7	40	35	4
60	60	35	8	40	36	7
75	75	35	8	36	39	4
80	80	45	8	36	30	7
100	100	45	9	36	30	8
125	125	48	9	25	20	8
150	150	48	10	25	20	8
200	200	48	15	30	24	13

NOTE: All dimensions are in inches. Requirements are not less than those shown.

2.1. Hydraulic cylinder and ram assembly. Unless otherwise specified (see ordering data), the hydraulic cylinder and ram assembly shall be of the dual stage type, which has a high volume low pressure, allowing rapid advancement of the ram to the workpiece, then switching to a low volume high pressure for maximum pressing tonnage. The cylinder and ram assembly shall be adjustable horizontally the entire length of the headrail.

3. Siderails, headrails, and worktable. The press siderails and worktable shall be provided with matching holes for the insertion of pins for supporting and positioning the worktable. The press shall be furnished with a mechanical winch for raising or lowering the worktable or headrail, whichever is applicable. The winch shall be mounted on either the siderail or headrail.

4. Worktable. The worktable shall have the strength to withstand the working forces when the press is operated at 100 per cent of the rated capacity. The holes in the press worktable shall align with the holes in the press siderails for the insertion of pins which support the worktable.

5. Work support devices. The work support devices shall consist of not less than two steel table plates, two steel "V" blocks, one flat ram nose, and a "V" ram nose for straightening operations. If the supplier normally furnishes a single pair of invertable blocks for supporting flat workpieces using one side and when inverted, supporting bar type workpieces, the single pair of invertable blocks may be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture of the press, materials hazardous to the ecological system as prohibited by the Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract order.

Quality assurance.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use His own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items shall meet the requirements specified herein. The inspection set forth in this description shall become a part of the contractors over all inspection system or quality program. The absence of any inspection requirements in the description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Sampling inspection. Sampling inspection shall be performed in accordance with MIL-STD-105. Sampling shall be at level II with an AQL of 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Examination. Each press selected for sample inspection shall be examined to determine compliance with the requirements of this CID.

Performance test. Each press offered for sample inspection shall be operated through the full vertical range. The press shall not have any binding or indication of improper operation.


Tonnage test. Each press selected for sample inspection shall be tested to determine compliance with the tonnage requirements in table I.

NOTES.

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Specify title, number, and date of this commercial item description.
b. Specify size (see table I).
c. Specify when required, single stage hydraulic pump.
d. Specify quantity required.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

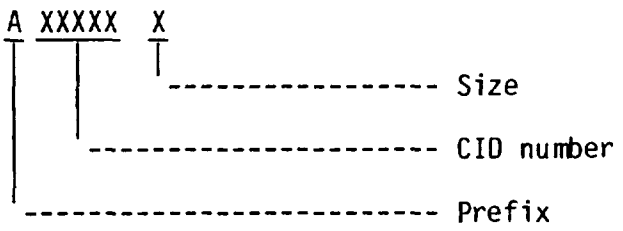

FED-STD-376 and MIL-STD-105 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.

Supersession data. This commercial item description covers items previously covered in MIL-P-80261, type III, class 2, style A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians

Army - AL
Navy - SH
Air Force - 99

Review Activities

Navy - YD
Air Force - 99
DLA - GS

User Activities

Army - AV, ME, WV
Navy - AS, MC

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3444-0024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.