MILITARY STANDARD

TRUCKLOADING

MINE, UNDERWATER MK 52 "Configuration A"

IN CRATE MK 110 MOD 0

MIL-STD-1320-217
(NAVY)

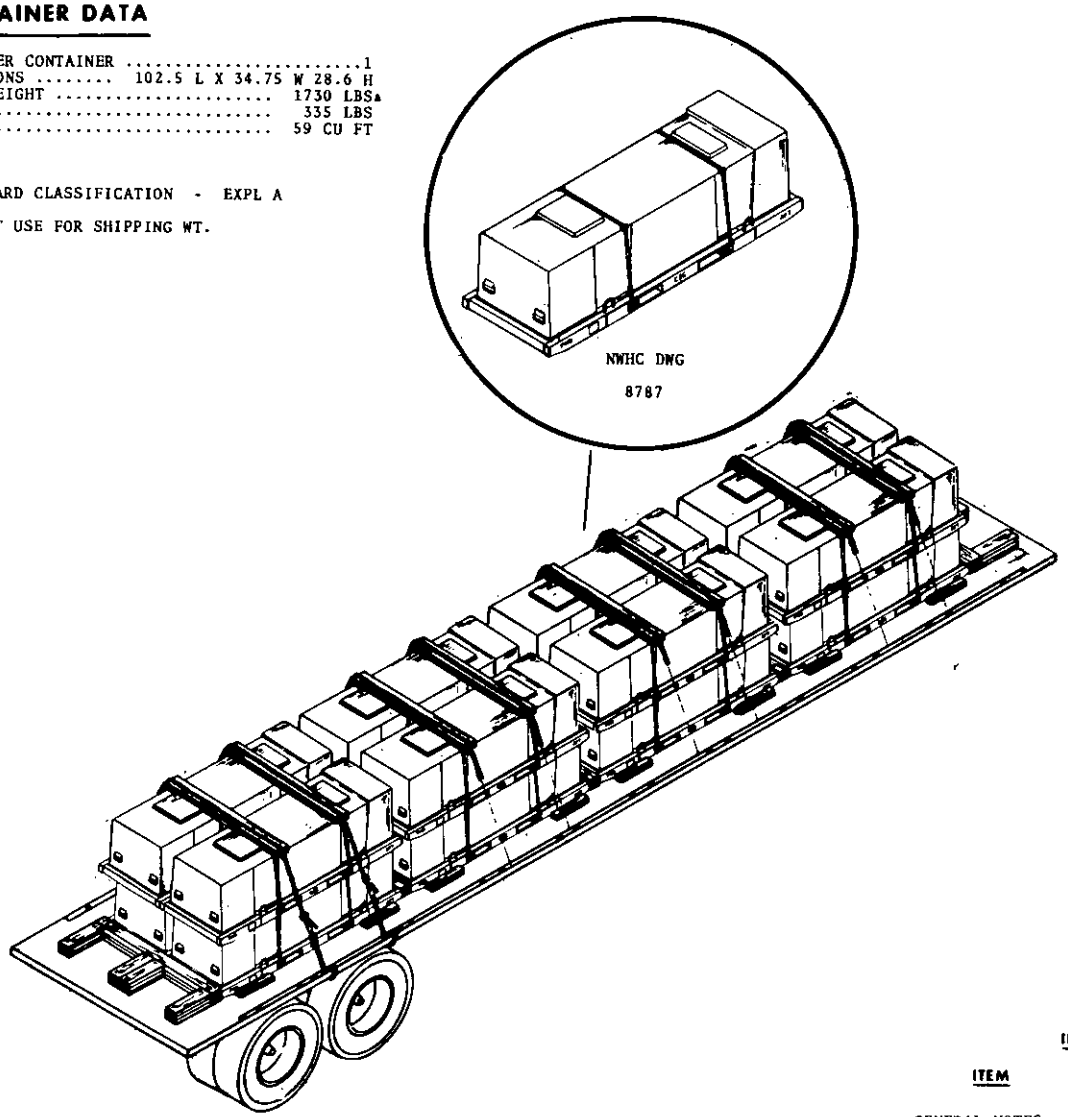
13 SEPTEMBER 1985

CONTAINER DATA

MINES PER CONTAINER 1
DIMENSIONS ..... 102.5 L X 34.75 W 28.6 H
GROSS WEIGHT ..... 1730 LBS▲
TARE WT..... 335 LBS
CUBE ..... 59 CU FT

DOT HAZARD CLASSIFICATION - EXPL A

▲ DO NOT USE FOR SHIPPING WT.



INDEX

ITEM	PAGE
GENERAL NOTES.....	2
FTL TRAILER (FLATBED) ...	3
LTL TRAILER	4, 6

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT

W.S. Gray NWHC 4/9/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

E. Kelly 9/12/85
SIGNATURE SEASYSCOM, BY DIRECTION DATE

ORIGINATOR 10 April 1985
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:48Z
Check the source to verify that this is the current version before use.

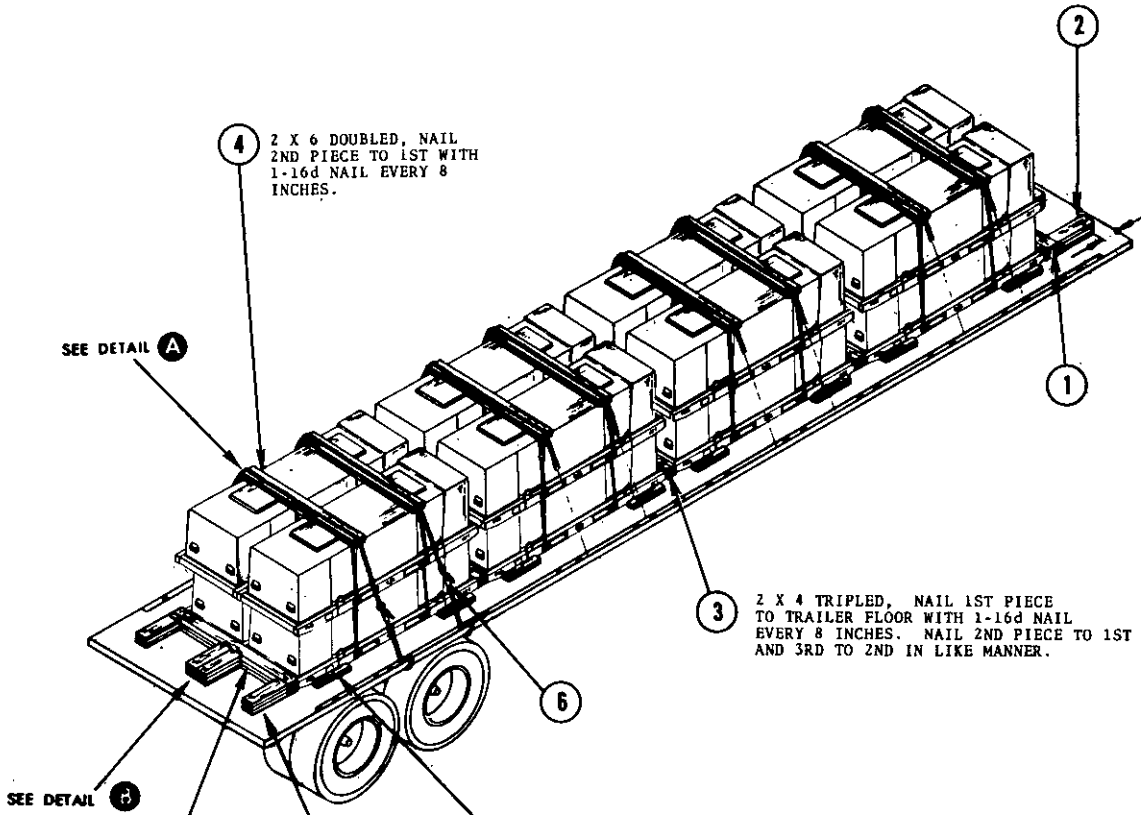
GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE UNDERWATER MINE MK 52 IN MINE CRATE, SHIPPING AND STORAGE MK 110 MOD 0. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. EACH STACK OF CONTAINERS IS SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THESE STRAPS PASS THROUGH THE FORK POCKETS OF THE TOP CONTAINERS AND RETURN THROUGH THE FORK POCKETS OF THE CONTAINERS IMMEDIATELY BELOW THE TOP CONTAINERS. TENSION STRAPS AND SEAL WITH ONE 1 1/4 SEAL DOUBLE NOTCHED.
4. BOTH CHAINS AND LOAD BINDERS AND STEEL STRAPS MAY BE USED FOR TIE DOWNS. PROTECTOR BOARDS MUST BE USED (DOUBLED 2 X 6'S) FOR BOTH CHAINS AND STRAPS.
5. CHAINS, FITTINGS, LOAD BINDERS, AND ALL OTHER MATERIALS (UNLESS OTHERWISE SPECIFIED) SHALL MEET THE REQUIREMENTS OF THE BASIC TRUCKLOADING DOCUMENT, MIL-STD-1320.
6. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTING AND LOAD BINDERS HAVE BEEN INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 72 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
7. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND REAR OF THE TRAILER.
9. DUE TO THE CRATE STRUCTURE, THE TIEDOWN CHAINS AND PROTECTOR BOARDS MUST BE PLACED OVER THE COVER RETAINING STRAPS. SEE DETAIL A.

FTL 40 FT & LONGER TRAILER (FLATBED)

1. A FULL TRUCKLOAD CONSISTS OF FOUR STACKS OF FOUR CONTAINERS FOR A TOTAL OF 16 CONTAINERS.
2. LOCATE THE END OF THE FORWARD BACKUP CLEAT SIX INCHES FROM THE FORWARD EDGE OF THE TRAILER (40 FT). FOR 42 FT TRAILERS LOCATE THE SAME MEMBERS 18 INCHES FROM THE EDGE AND SIMILARLY FOR 44-45 FT TRAILERS, INCREASE THE DISTANCE TO 42 INCHES.
3. WHEN STATE LAW PERMITS, "DOUBLES" MAY BE USED. BLOCK AND TIE DOWN USING THE PRINCIPLES OF THIS DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.



TRUCKLOAD DATA

NUMBER OF CONTAINERS 16

NUMBER OF MINES 16

WEIGHT (APPROX) .....28,000 LBS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	8	SEAL	SEE NOTE 5 PAGE 2	1 1/4
8	7	CROSS STRAP	SEE NOTE 5 PAGE 2	1 1/4 x 035 x 12 FT
8	6	CHAIN AND LOAD BINDER	SEE NOTE 5 PAGE 2	5/16 OR 3/8
32	5	SLEEPER	SEE FIELD NOTE	2 x 4 x 18
16	4	PROTECTOR BOARD	SEE FIELD NOTE	2 x 6 x 62 1/4
9	3	CROSSMEMBER	SEE FIELD NOTE	2 x 4 x 70
24	2	BACKUP CLEAT	SEE FIELD NOTE	2 x 6 x 18
6	1	CROSSMEMBER	SEE FIELD NOTE	2 x 6 x 70











LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT & LONGER TRAILER (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I.
2. FIFTEEN, ELEVEN, AND SEVEN CONTAINERS CREATES A STACK UNEVEN IN HEIGHT AND SHOULD NOT BE SHIPPED BECAUSE OF TIE DOWN PROBLEMS.
3. POSITION CONTAINERS ON TRAILER AS SHOWN IN TABLE, BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT, MIL-STD-1320.
4. THE LTL PLAN SHOWN ON PAGE 5 IS THE CORRECT LESS-THAN-TRUCKLOAD FOR THE QUANTITY OF CONTAINERS SHOWN. THIS DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY, SINCE LTL SHIPMENTS MAY CONSIST OF A LESSER NUMBER OF CONTAINERS.
5. WHEN STATE LAW PERMITS, "DOUBLES" MAY BE USED. BLOCK AND TIE DOWN USING THE PRINCIPLES OF THIS DOCUMENT.


TABLE I

NO. OF CONTAINERS	LOAD PATTERN * (FWD →)	NO. OF CONTAINERS	LOAD PATTERN * (FWD →)
14		6**	
13**		5**	
12		4	
10		3**	
9**		2	
8		1**	

* LOAD PATTERN SHOWS FLOOR PLAN FOR TRAILER.
NUMBER INDICATES THE NUMBER OF CONTAINERS IN A LAYER.


** SEE DETAILS C AND D FOR FLOOR BLOCKING.

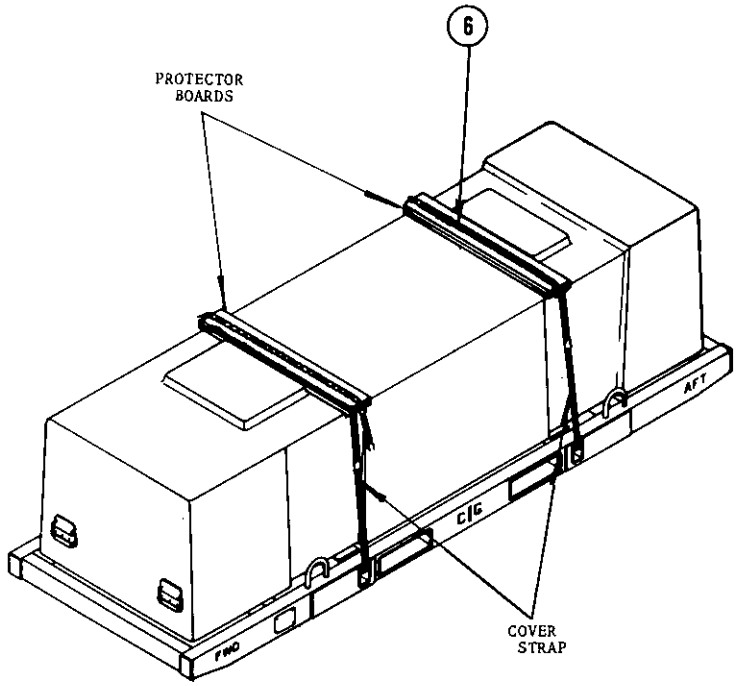Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.




DETAIL A

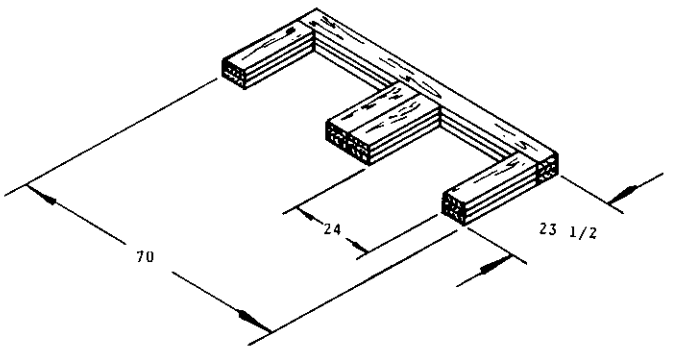
NOTE - PROTECTOR BOARDS AND TIE DOWN CHAINS/STRAPS ARE PLACED DIRECTLY OVER COVER STRAPS AS SHOWN.



DETAIL B

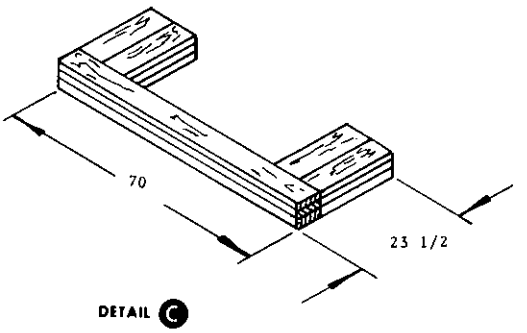


DETAIL C

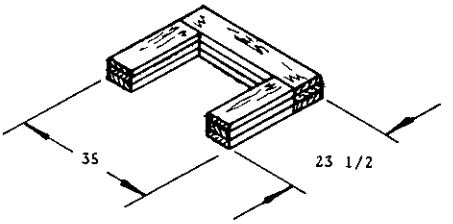

DETAIL D

NOTE - FOR LTL'S MARKED ** USE DETAILS C & D. FOR THE SINGLE CRATE USE ONE DETAIL D AT EACH END

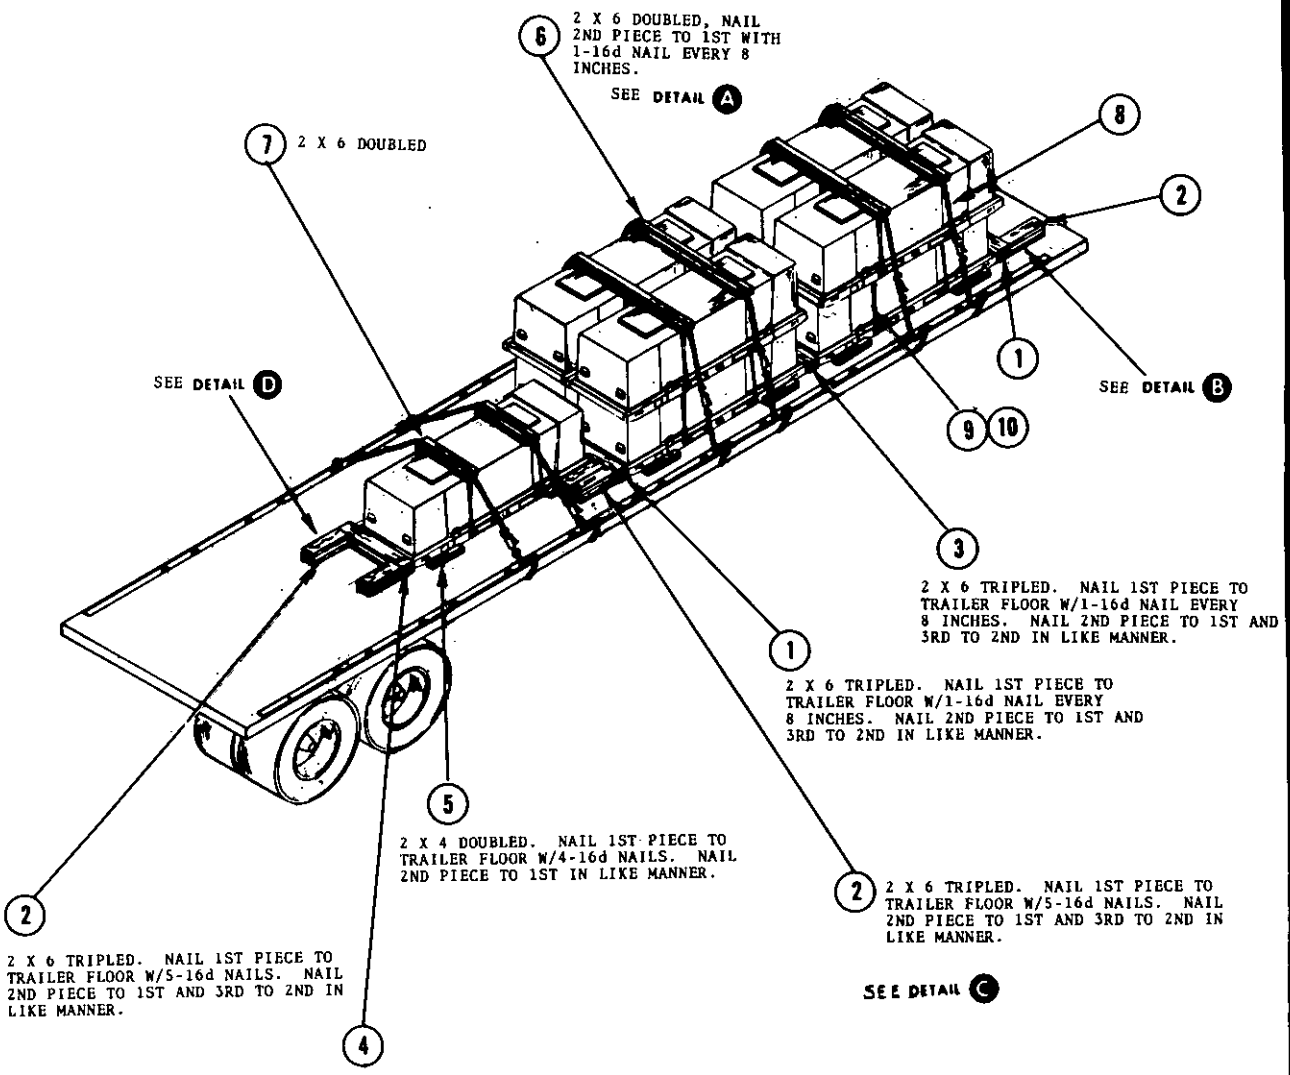Source: https://assist.dla.mil -- Downloaded: 2026-10-23 23:48Z
Check the source to verify that this is the current version before use.



REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	10	SEAL	SEE NOTE 5 PG 2	1 1/4
4	7	CROSS STRAP	SEE NOTE 5 PG 2	1 1/4 X 035 X 12 FT
6	8	CHAIN AND LOAD BINDER	SEE NOTE 5 PG 2	5/16 OR 3/8
4	7	PROTECTOR BOARD	SEE FIELD NOTE	2 X 6 X 27 1/2
8	6	PROTECTOR BOARD	SEE FIELD NOTE	2 X 6 X 62 1/4
24	5	SLEEPER	SEE FIELD NOTE	2 X 4 X 18
3	4	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 35
3	3	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 70
24	2	BACKUP CLEAT	SEE FIELD NOTE	2 X 6 X 18
6	1	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 70

LIST OF MATERIALS

SAMPLE

LTL TRUCKLOAD DATA

NUMBER OF CONTAINERS 9

NUMBER OF MINES 9

WEIGHT (APPROX.) .....15,800 LBS

LTL 40 FT &LONGER TRAILER (FLATBED)

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N615)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 605-036/24494