MILITARY STANDARD

MIL-STD-1323-182
(NAVY)

25 JUNE 1981


UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB, PRACTICE MK 106 MOD 5

UNIT LOAD DATA


DODIC/NALC E961

NUMBER OF BOMBS PER CONTAINER	8
NUMBER OF CONTAINERS PER UNIT LOAD	12
NUMBER OF BOMBS PER UNIT LOAD	96
GROSS WEIGHT OF ONE CONTAINER (APPROX.)	42.5 LBS
WEIGHT OF PALLET	94 LBS
GROSS WEIGHT OF UNIT LOAD (APPROX.)	604 LBS
CUBE	39.3 CU FT

DO NOT STACK MORE THAN
6 UNIT LOADS HIGH IN STORAGE

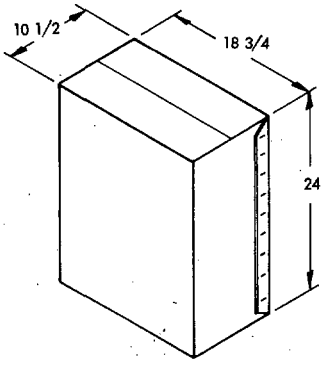

CONTAINER,
DWG. NO. 1360067

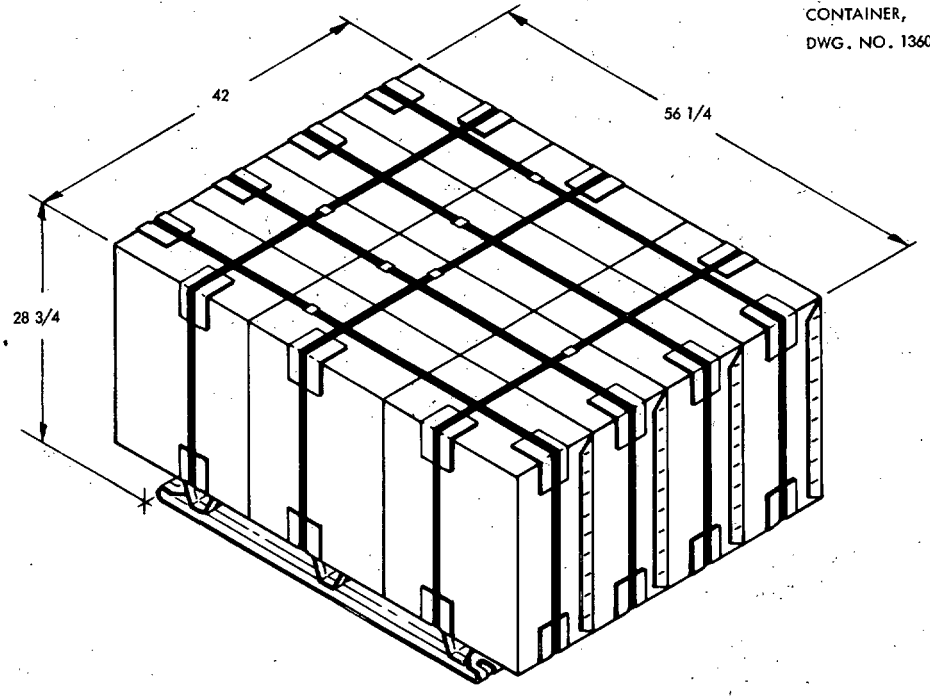

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray NWHC — 6/23/81
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) — DATE

J.E. Kelly — 6/25/81
SIGNATURE AIR SYSCOM BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR Charles McBride — 6/19/81
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(a) THREAD STRAPPING, ITEM 2, BETWEEN DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.
(b) POSITION CONTAINERS ON THE PALLET WITH EQUAL OVERHANG ON BOTH SIDES AND ENDS.
(c) POSITION STRAPPING, ITEM 2, OVER EDGE PROTECTORS, ITEM 5, AND AROUND UNIT LOAD AS SHOWN. TENSION STRAPPING UNTIL A DEPRESSION OF ABOUT 1/8 INCH IS MADE IN THE FIBERBOARD EDGE PROTECTORS AND DOUBLE NOTCH SEAL, ITEM 4.
(d) POSITION STRAPPING, ITEM 3, UNDER PALLET DECK AROUND EDGE PROTECTORS AND OVER UNIT LOAD AS SHOWN. TENSION STRAPPING UNTIL A DEPRESSION OF ABOUT 1/8 INCH IS MADE IN THE FIBERBOARD EDGE PROTECTORS. DOUBLE NOTCH SEAL.


MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

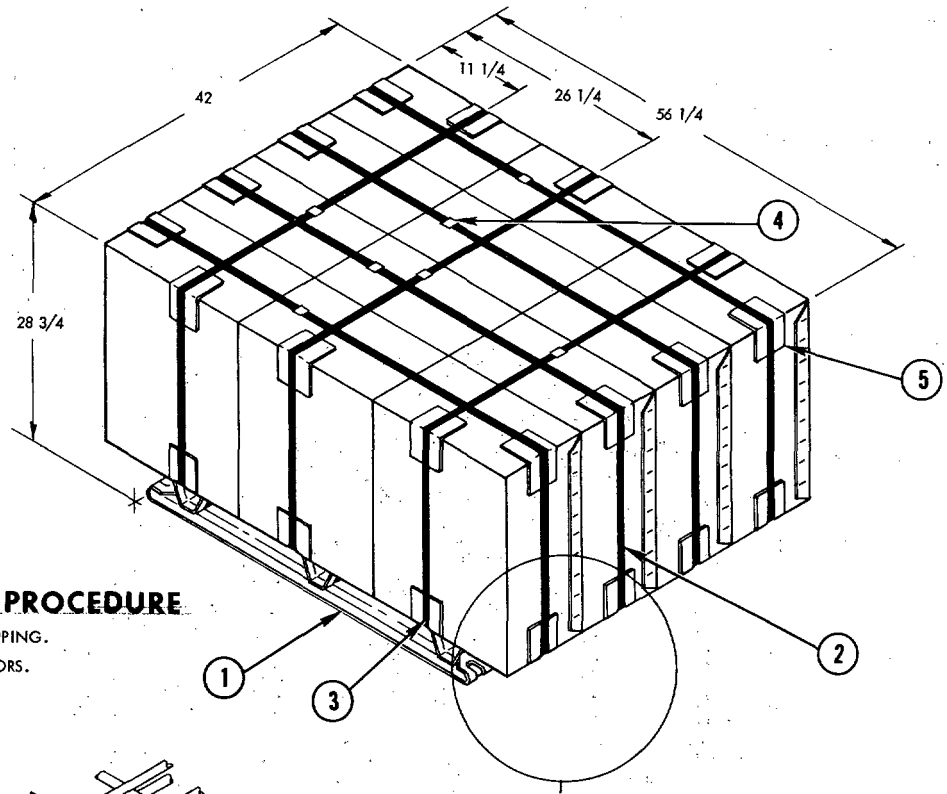

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING.
(b) REMOVE EDGE PROTECTORS.
(c) REMOVE CONTAINERS.

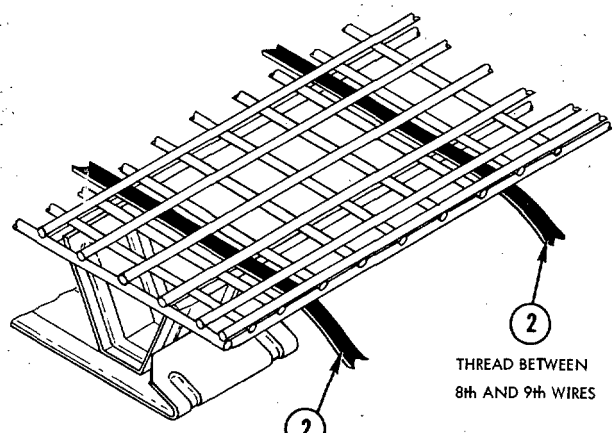

DETAIL A

NOTES: 1. COLD ROLLED, HEAT TREATED .031 STRAPPING MAY BE USED.
2. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
28	5	EDGE PROTECTOR	FIBERBOARD PPP-F-320 V3C	4 X 8
7	4	SEAL	SEE NOTE 1	3/4
3	3	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 10 FT 6
4	2	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 15 FT
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4 3/4

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY - OS, AS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140 - N505)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/3025