MILITARY STANDARD

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB, GENERAL PURPOSE: 500 LB MK 82 & MODS
INERT LOADED (UNCOATED)
ON PALLET, LOADING AND STORAGE, MHU-122/E
DL 623AS100

UNIT LOAD DATA

DODIC/NALC NO F240, F244

NUMBER OF BOMBS PER UNIT LOAD	6
GROSS WEIGHT OF ONE BOMB (APPROX)	485 LBS
WEIGHT OF BOMB PALLET (APPROX)	170 LBS
WEIGHT OF STEEL STRAPPING (APPROX)	13 LBS
GROSS WEIGHT OF UNIT LOAD (APPROX)	3093 LBS
WEIGHT OF BOTTOM FRAME (APPROX)	108 LBS
CUBE	35.4 CU FT

DO NOT STACK MORE THAN
6 UNIT LOADS HIGH IN STORAGE

HAZARD CLASSIFICATION
NONE (INERT)

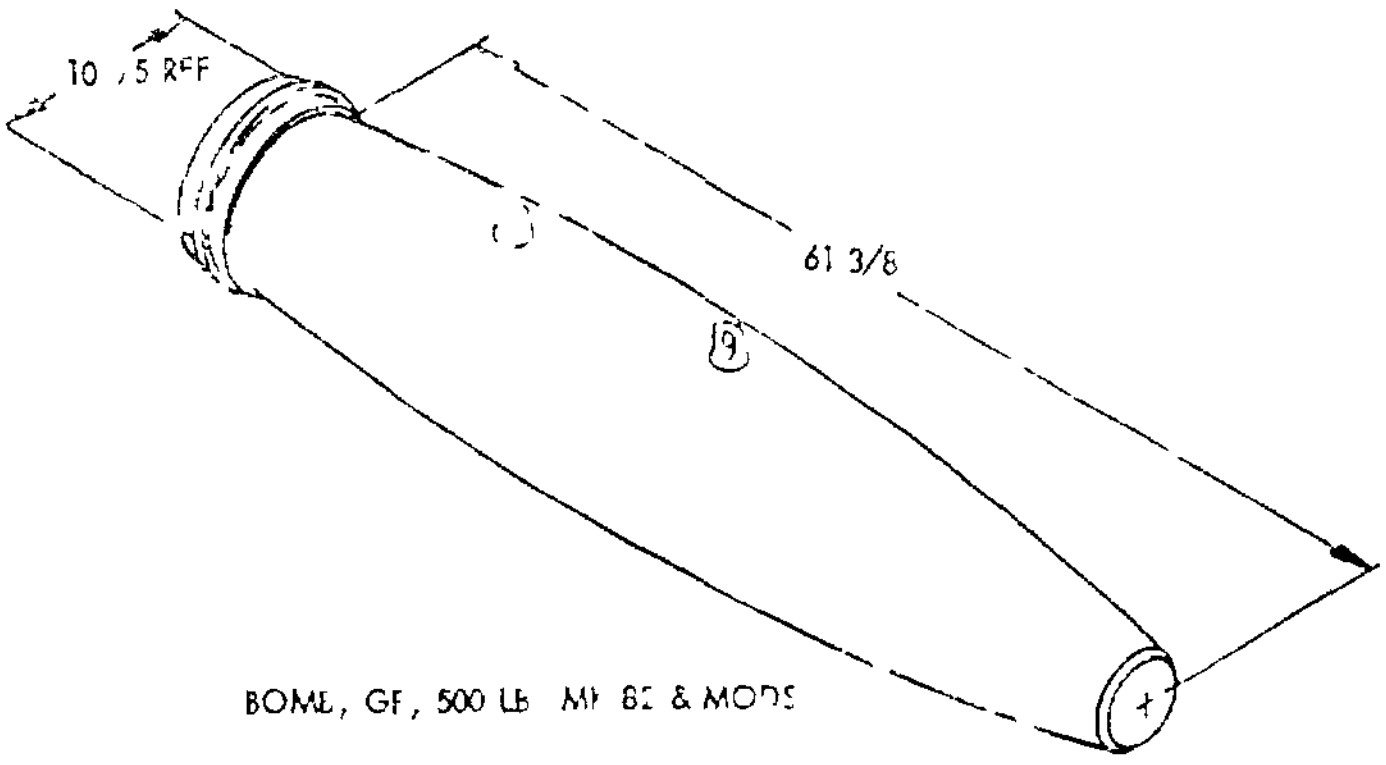

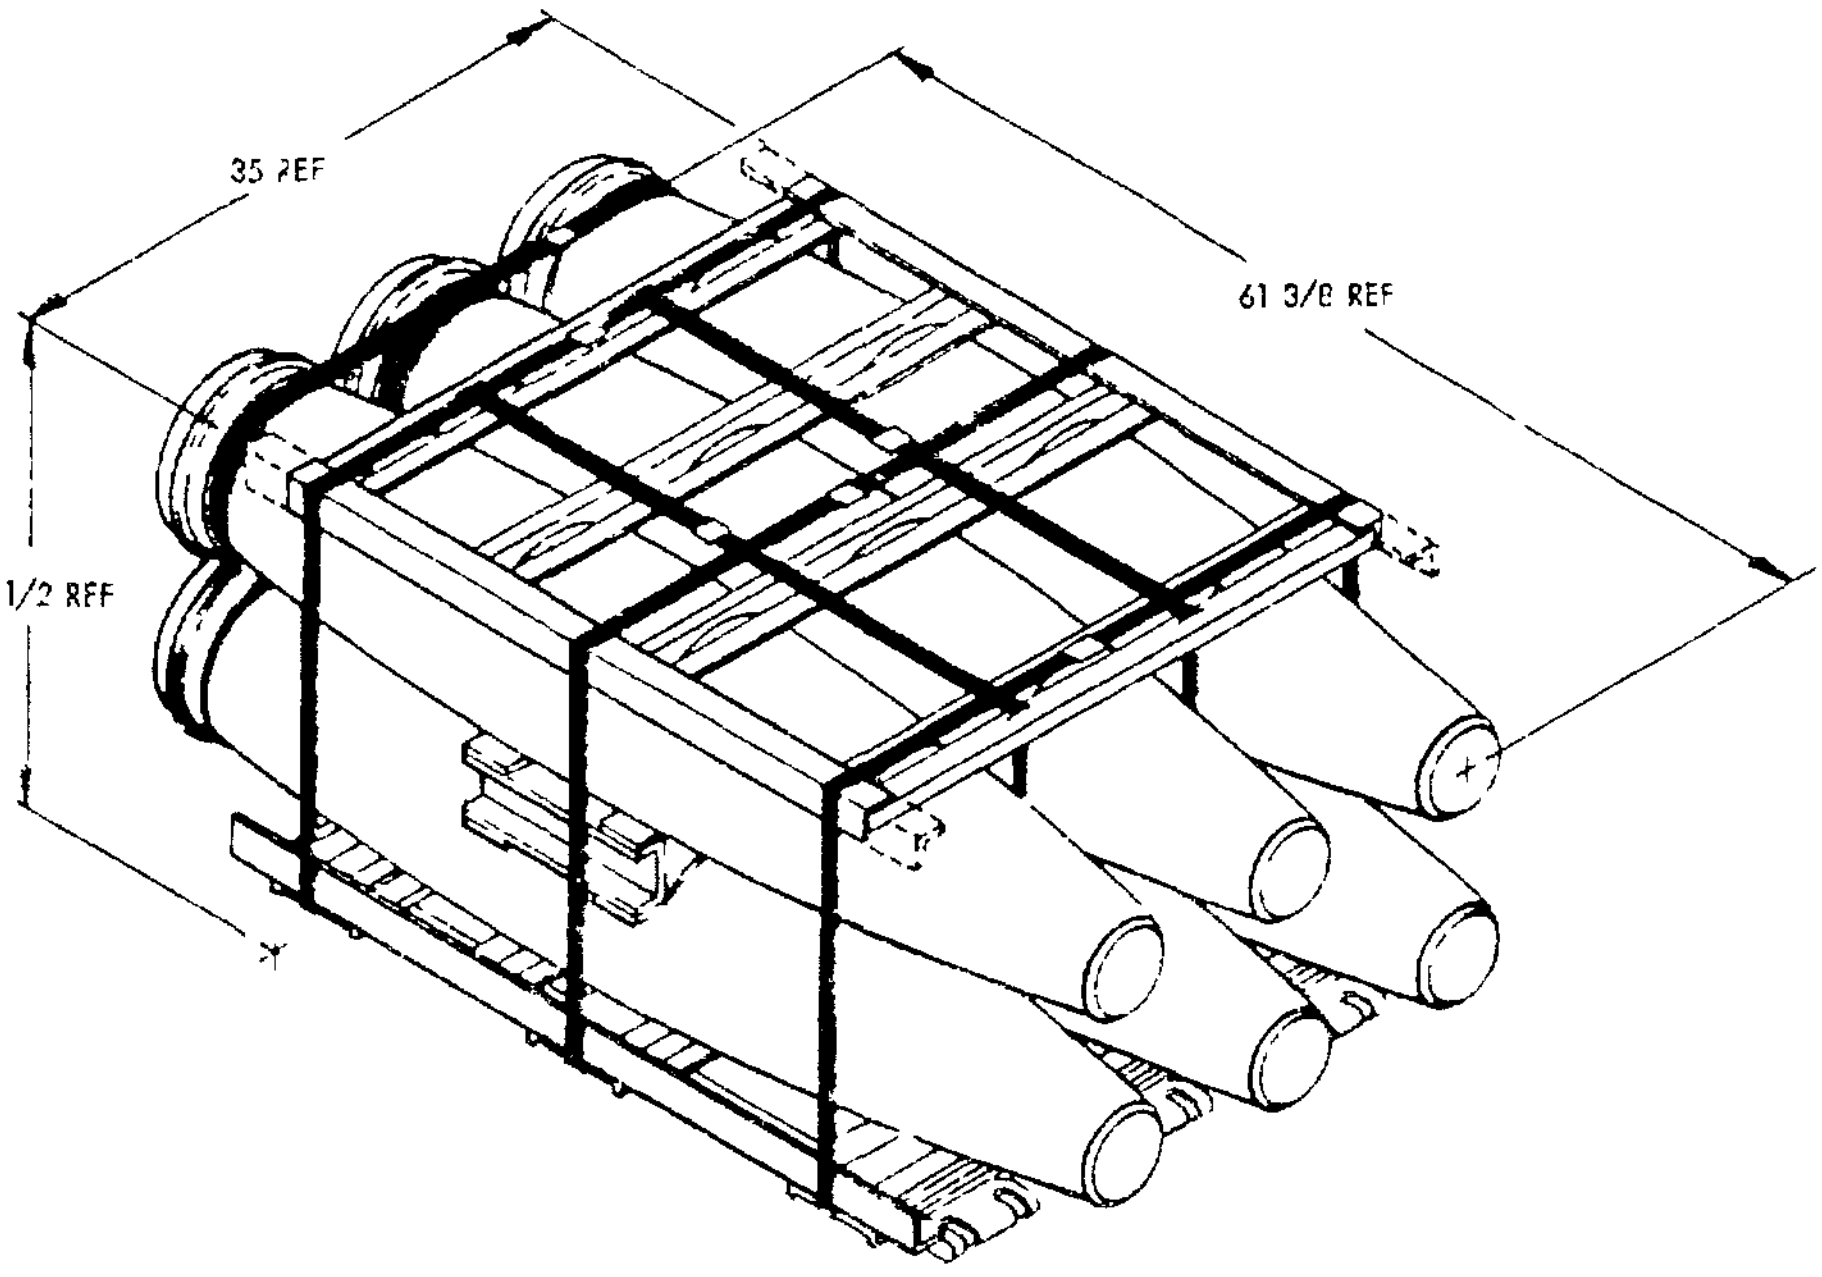

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS

M. S. Gray NWHC 9/19/80
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL STD 1323

ORIGINATOR V McBride 9/19/80
DATE

NAVAL WEAPONS HANDLING CENTER
EARLE, NEW JERSEY

PALLETIZING PROCEDURE

(a) PLACE THREE BOMBS ON THE BOTTOM FRAME, ITEM , WITH THE FWD END OF THE BOMBS ON THE FWD END OF THE FRAME ASCERTAIN THE PROPER ALIGNMENT OF THE SUSPENSION LUGS THE LONGITUDINAL AXIS OF THE LUG SHOULD BE PARALLEL TO THE LONGITUDINAL AXIS OF THE BOMB WITH THE LUGS IN THIS POSITION THEY WILL FIT ON THE OUTSIDE OF THE CENTER HAT SECTIONS AND THE BOMBS MUST BE TURNED SO THAT THE LUGS WILL BE IN THE 5 OR 7 O'CLOCK POSITION SEE SECTION A-A AND VIEW B-B

(b) POSITION THE INTERMEDIATE FRAME, ITEM 2, ON THE FIRST ROW OF BOMBS, VERTICAL TO THE CENTER HAT SECTIONS ON THE BOTTOM FRAME, SEE VIEW B-B

(c) POSITION THE SECOND ROW OF BOMBS ON THE INTERMEDIATE FRAME, WITH SUSPENSION LUGS DOWN AND IN THE SAME POSITION AS THE FIRST ROW SEE SECTION A-A AND VIEW B-B

(d) POSITION THE TOP FRAME, ITEM 3, WITH THE FWD END OF THE FRAME IN THE SAME DIRECTION AS THE FWD END OF THE BOMBS

(e) POSITION THE LONGITUDINAL STRAPPING, ITEM 4 UNDER THE NOTCHED SECTIONS ON THE BOTTOM FRAME, BETWEEN THE ENDS OF THE BOMBS AND THROUGH THE SLOTS IN THE TOP FRAME, TENSION AND DOUBLE NOTCH THE SEAL, ITEM 6

(f) POSITION STRAPPING, ITEM 5 UNDER THE CHANNELS ON THE BOTTOM FRAME, AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH THE SEAL

(g) THREAD STRAPPING, ITEM 7, AROUND OUTBOARD BOMBS AND OVER THE TOP OF THE CENTER BOMB AS SHOWN IN SECTION A-A STRAPPING TO BE ADJACENT TO THE SHIPPING CAPS

MARKING THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-132

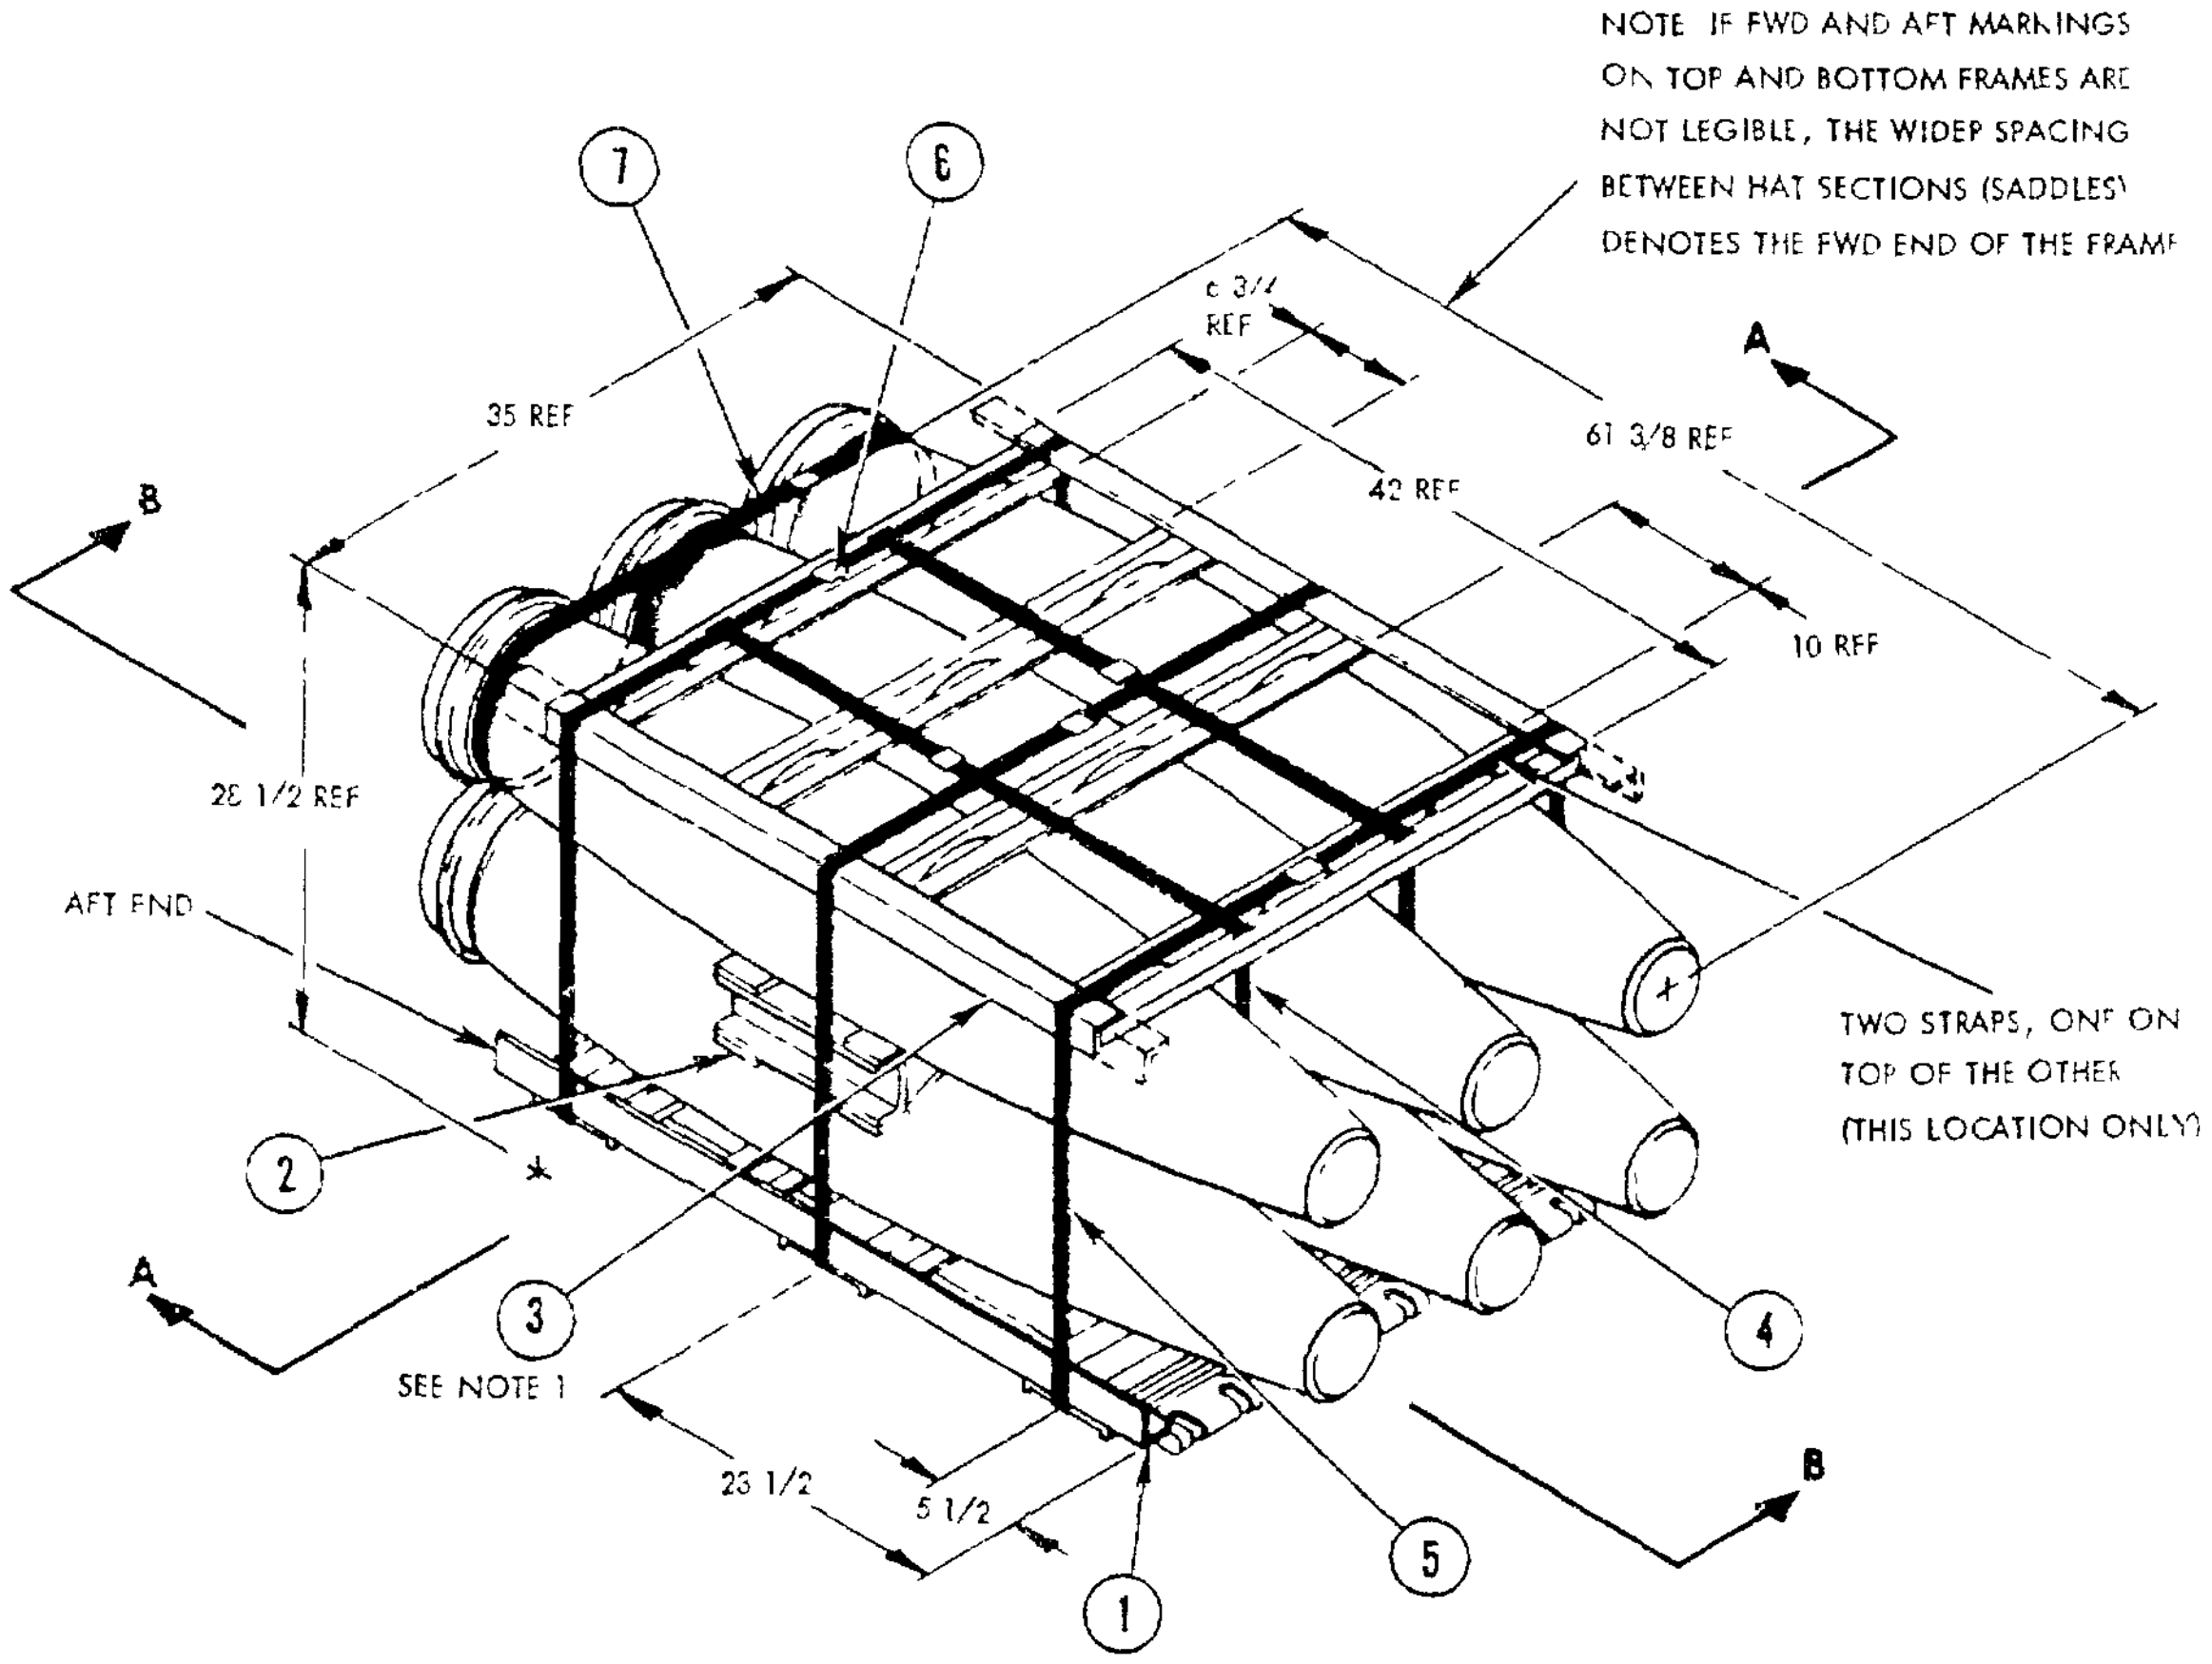
NOTE IF FWD AND AFT MARKINGS ON TOP AND BOTTOM FRAMES ARE NOT LEGIBLE, THE WIDER SPACING BETWEEN HAT SECTIONS (SADDLES) DENOTES THE FWD END OF THE FRAME
7
6
6 3/4 REF
A
35 REF
61 3/8 REF
42 REF
B
10 REF
28 1/2 REF
AFT END
TWO STRAPS, ONE ON TOP OF THE OTHER (THIS LOCATION ONLY)
2
A
3
4
SEE NOTE 1
23 1/2
5 1/2
B
5
1

NOTES

1 EARLY PRODUCTION TOP FRAMES, ITEM 3, HAVE EXTENDED ANGLES (46 3/4 LONG) AS SHOWN IN PHANTOM

2 031 COLD ROLLED, HEAT TREATED, MAY BE USED

3 UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT MIL-STD-1323

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	7	STRAPPING	SEE NOTES 2 & 3	1 1/4 X 035 X 10 FT 6
7	6	SEAL	SEE NOTE 3	1 1/4
4	5	STRAPPING	SEE NOTES 2 & 3	1 1/4 X 035 X 11 FT 6
2	4	STRAPPING	SEE NOTES 2 & 3	1 1/4 X 035 X 12 FT 6
1	3	FRAME, TOP PALLET MHU-122/E	623AS101	SEE NOTE 1
1	2	FRAME, INTERMEDIATE PALLET MHU-122/E	623AS102	SEE NOTE 1
1	1	FRAME, BOTTOM PALLET MHU-122/E	623AS103	SEE NOTE 1

LIST OF MATERIALS

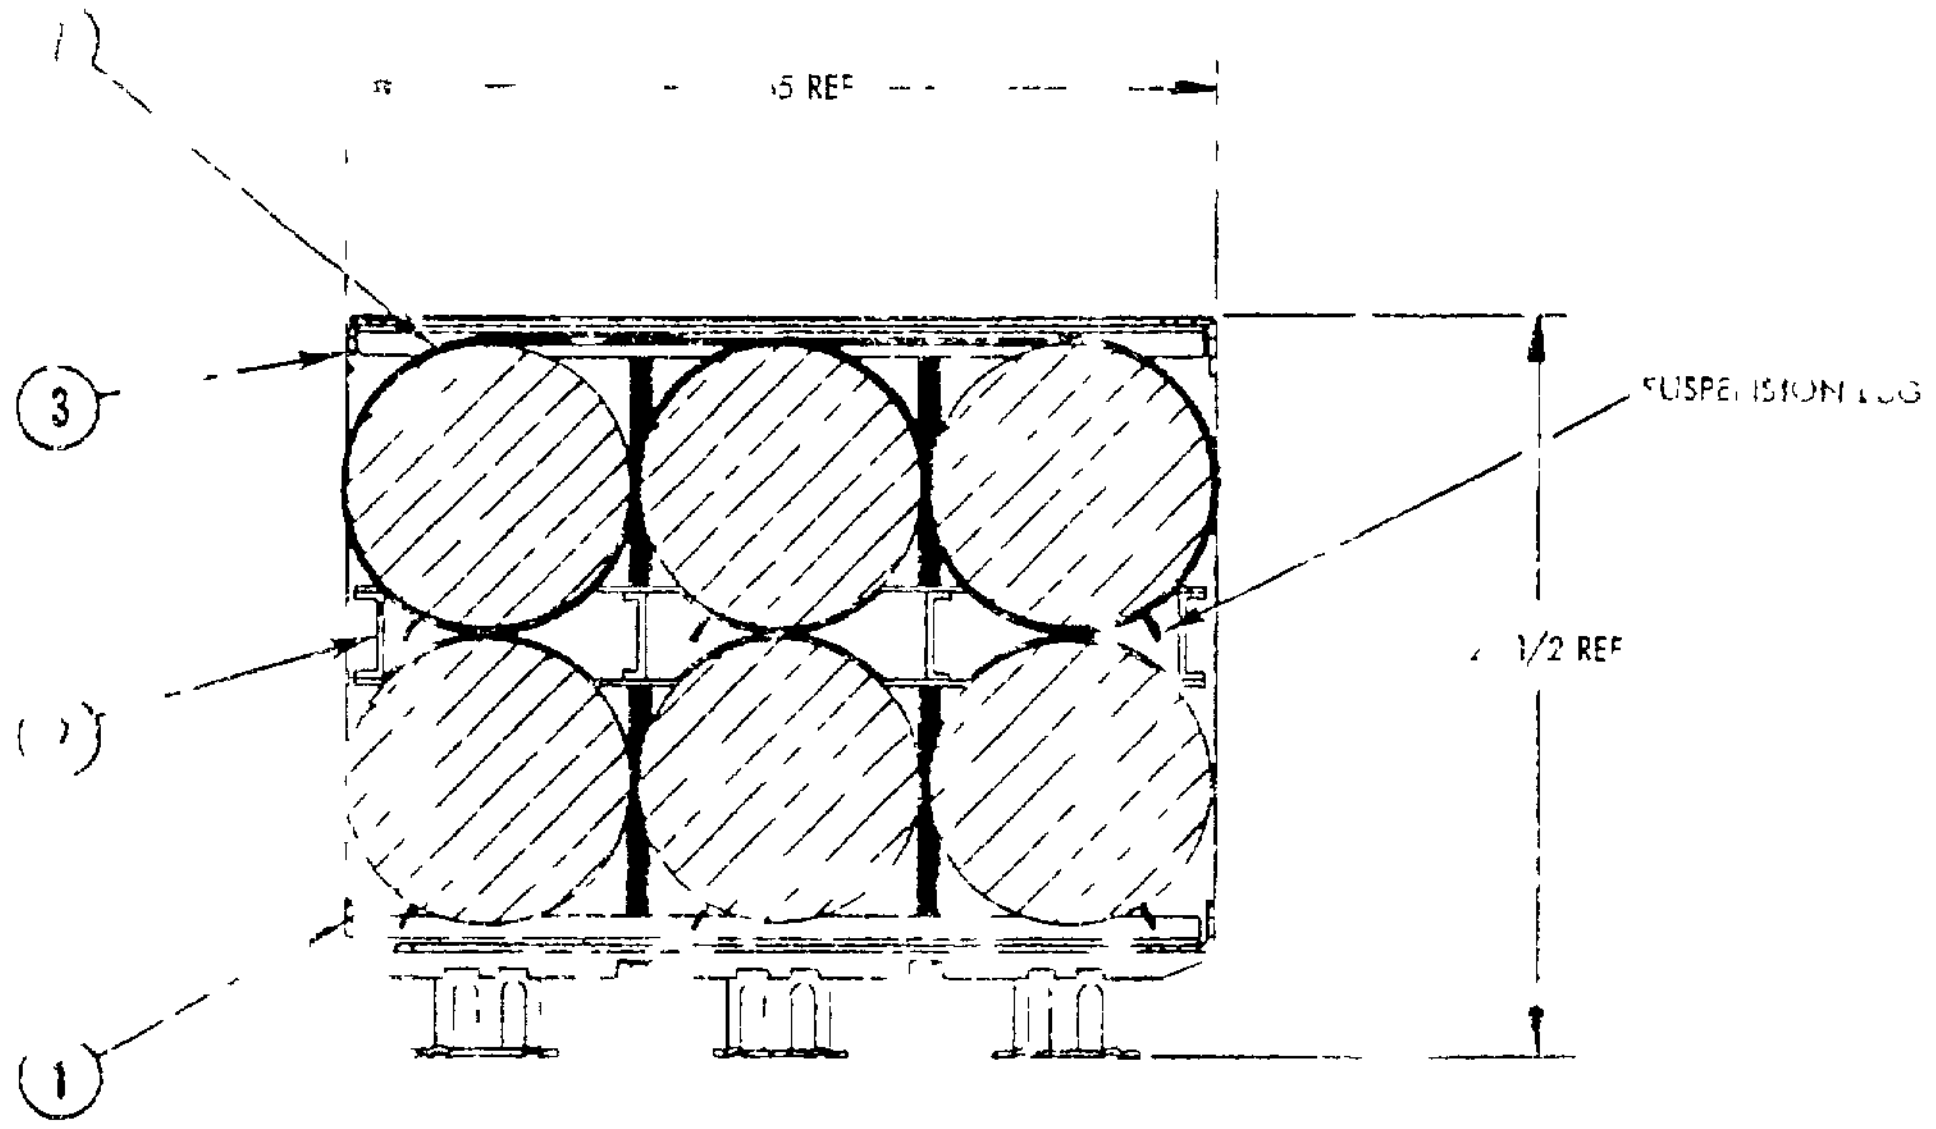

SECTION A-A

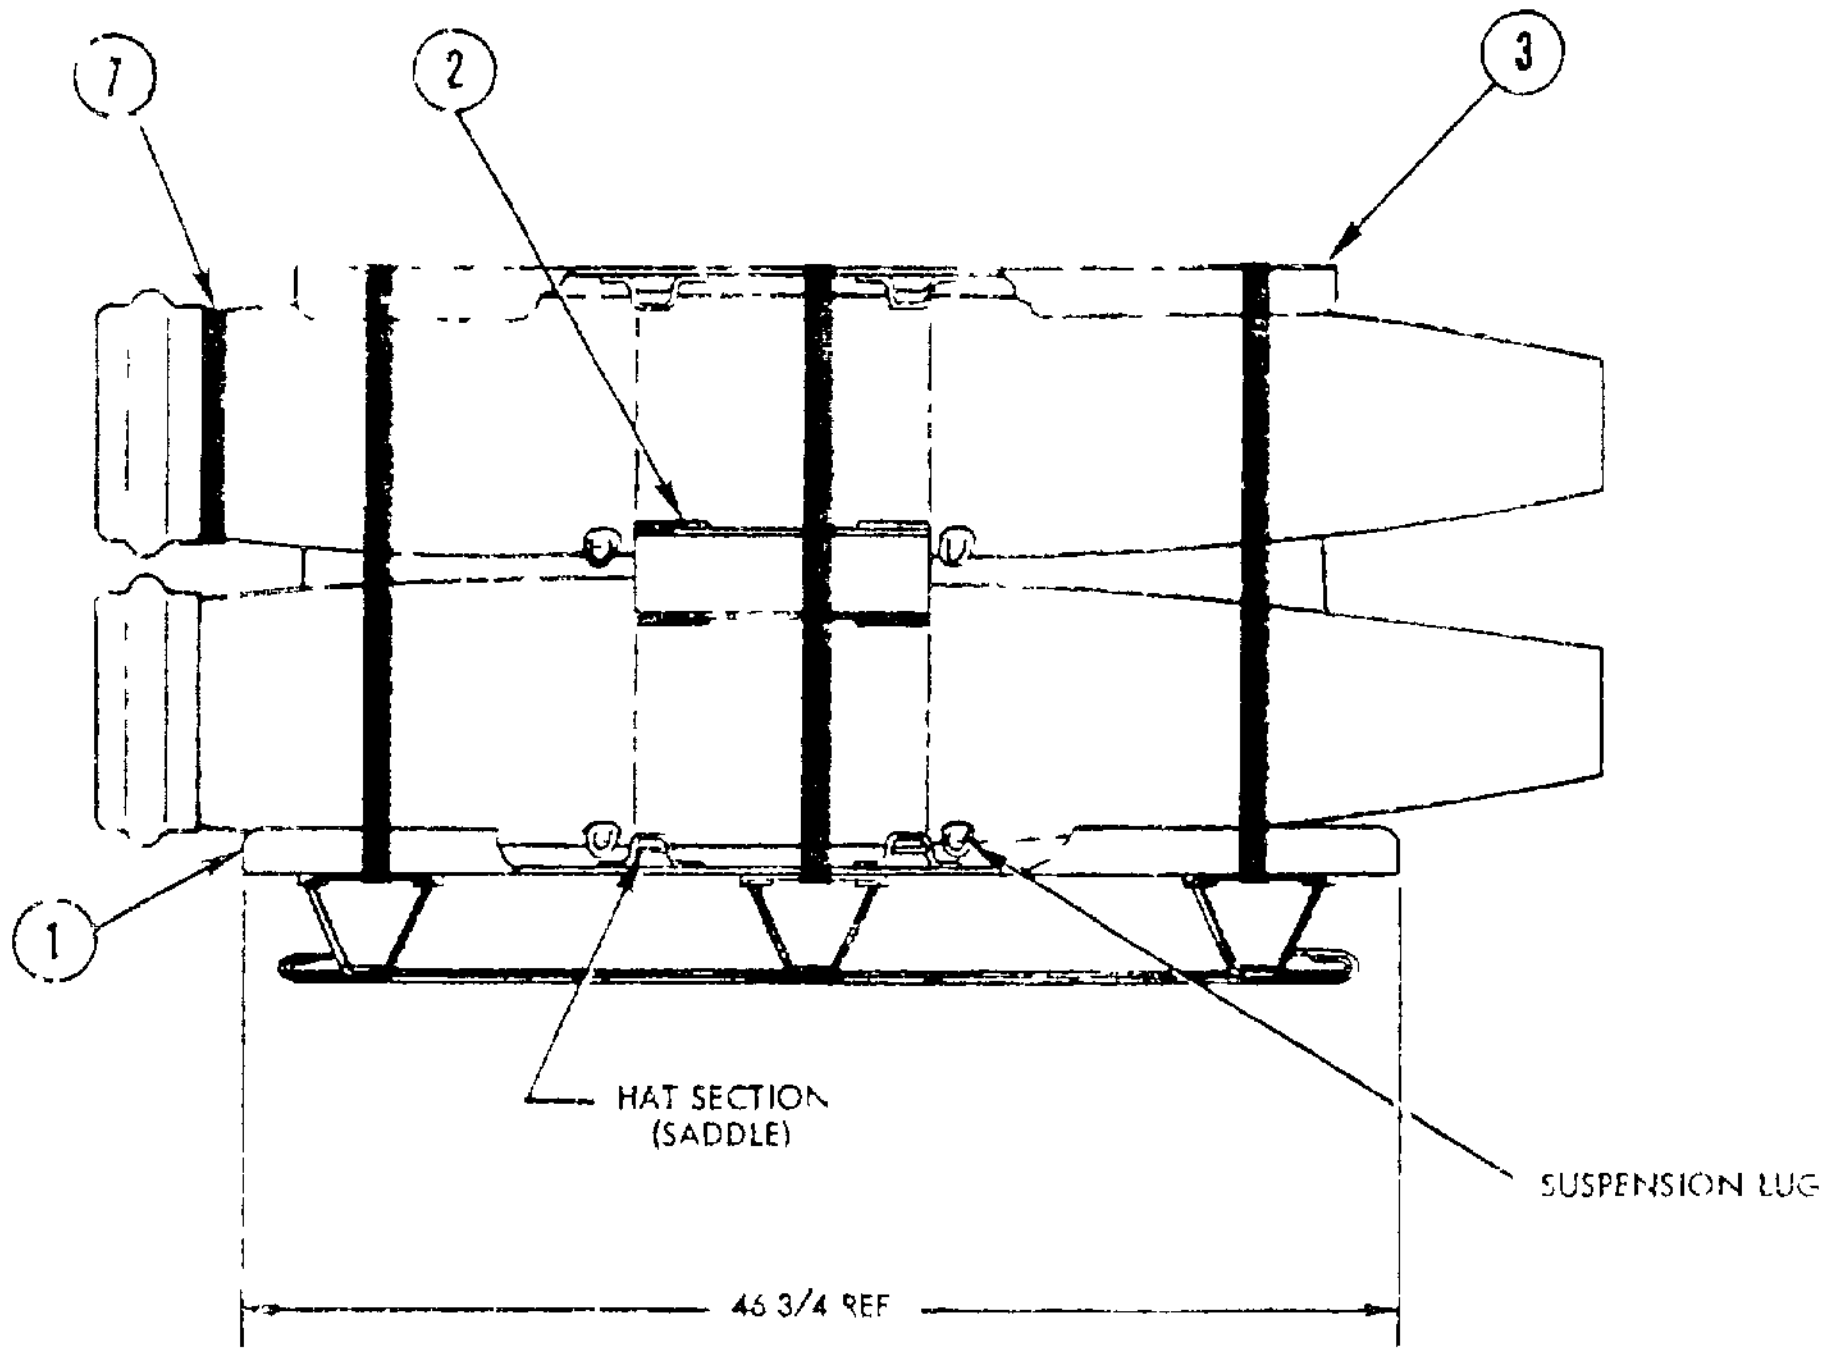

VIEW B-B

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING
(b) REMOVE THE TOP FRAME
(c) REMOVE THE TOP ROW OF BOMBS
(d) REMOVE THE INTERMEDIATE FRAME
(e) REMOVE THE BOTTOM ROW OF BOMBS
(f) REPOSITION THE INTERMEDIATE AND THE TOP
FRAMES ON THE BOTTOM FRAME

REVIEW ACTIVITY:
[illegible] AS

PREPARING ACTIVITY
NAVY-OS

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1323-205 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

FOLD

DEPARTMENT OF THE NAVY

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle (NWHC R Harris)
Colts Neck, NJ 07722

FOLD