MILITARY STANDARD

MIL-STD-1323-361A
(NAVY)

27 OCT 1992

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
MK 14 CANISTER PHST
TOMAHAWK

SUPERCEDING MIL-STD-13[illegible]-362
10 MAY [illegible]

UNIT LOAD DATA

GROSS WEIGHT OF UNIT LOAD 1210 LBS
CUBE 63.5 CU FT △

△ DO NOT USE FOR SHIPPING WEIGHT

UNIT LOAD DIMENSIONS

LENGTH	43
WIDTH	40
HEIGHT	84

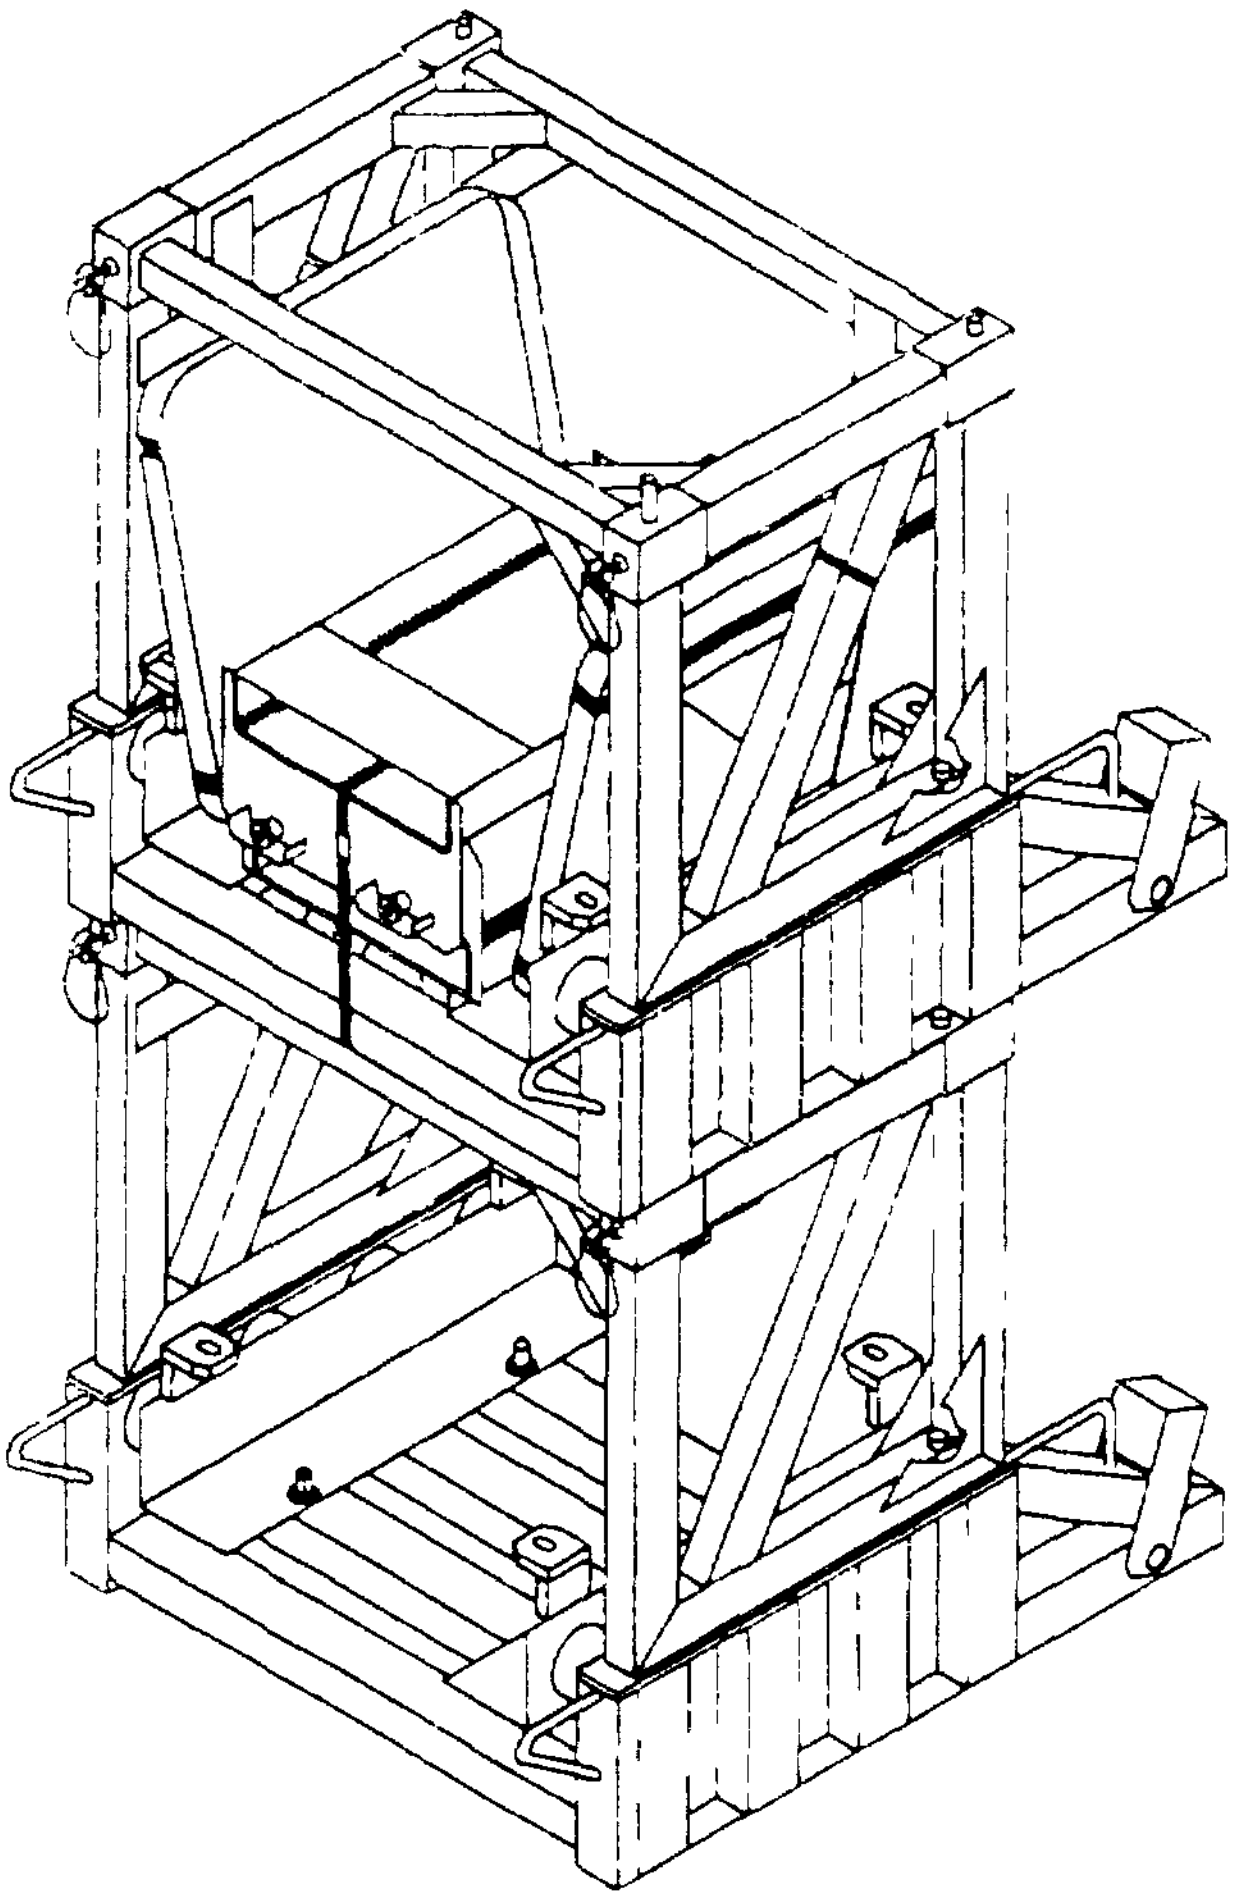

AMSC NO N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL HDBK 236 (NAVY)

REV LTR	REVISION DESCRIPTION	DATE	APPROVAL TDA	APPROVAL SYSCOM
A	ADDED SH 4 ALT UNITIZING			[illegible]

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE DIV NAVWPNSTA EARLE DATE

SIGNATURE NAVSEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR DATE

NAVWPNSTA EARLE NEW JERSEY PAGE [illegible] OF 4

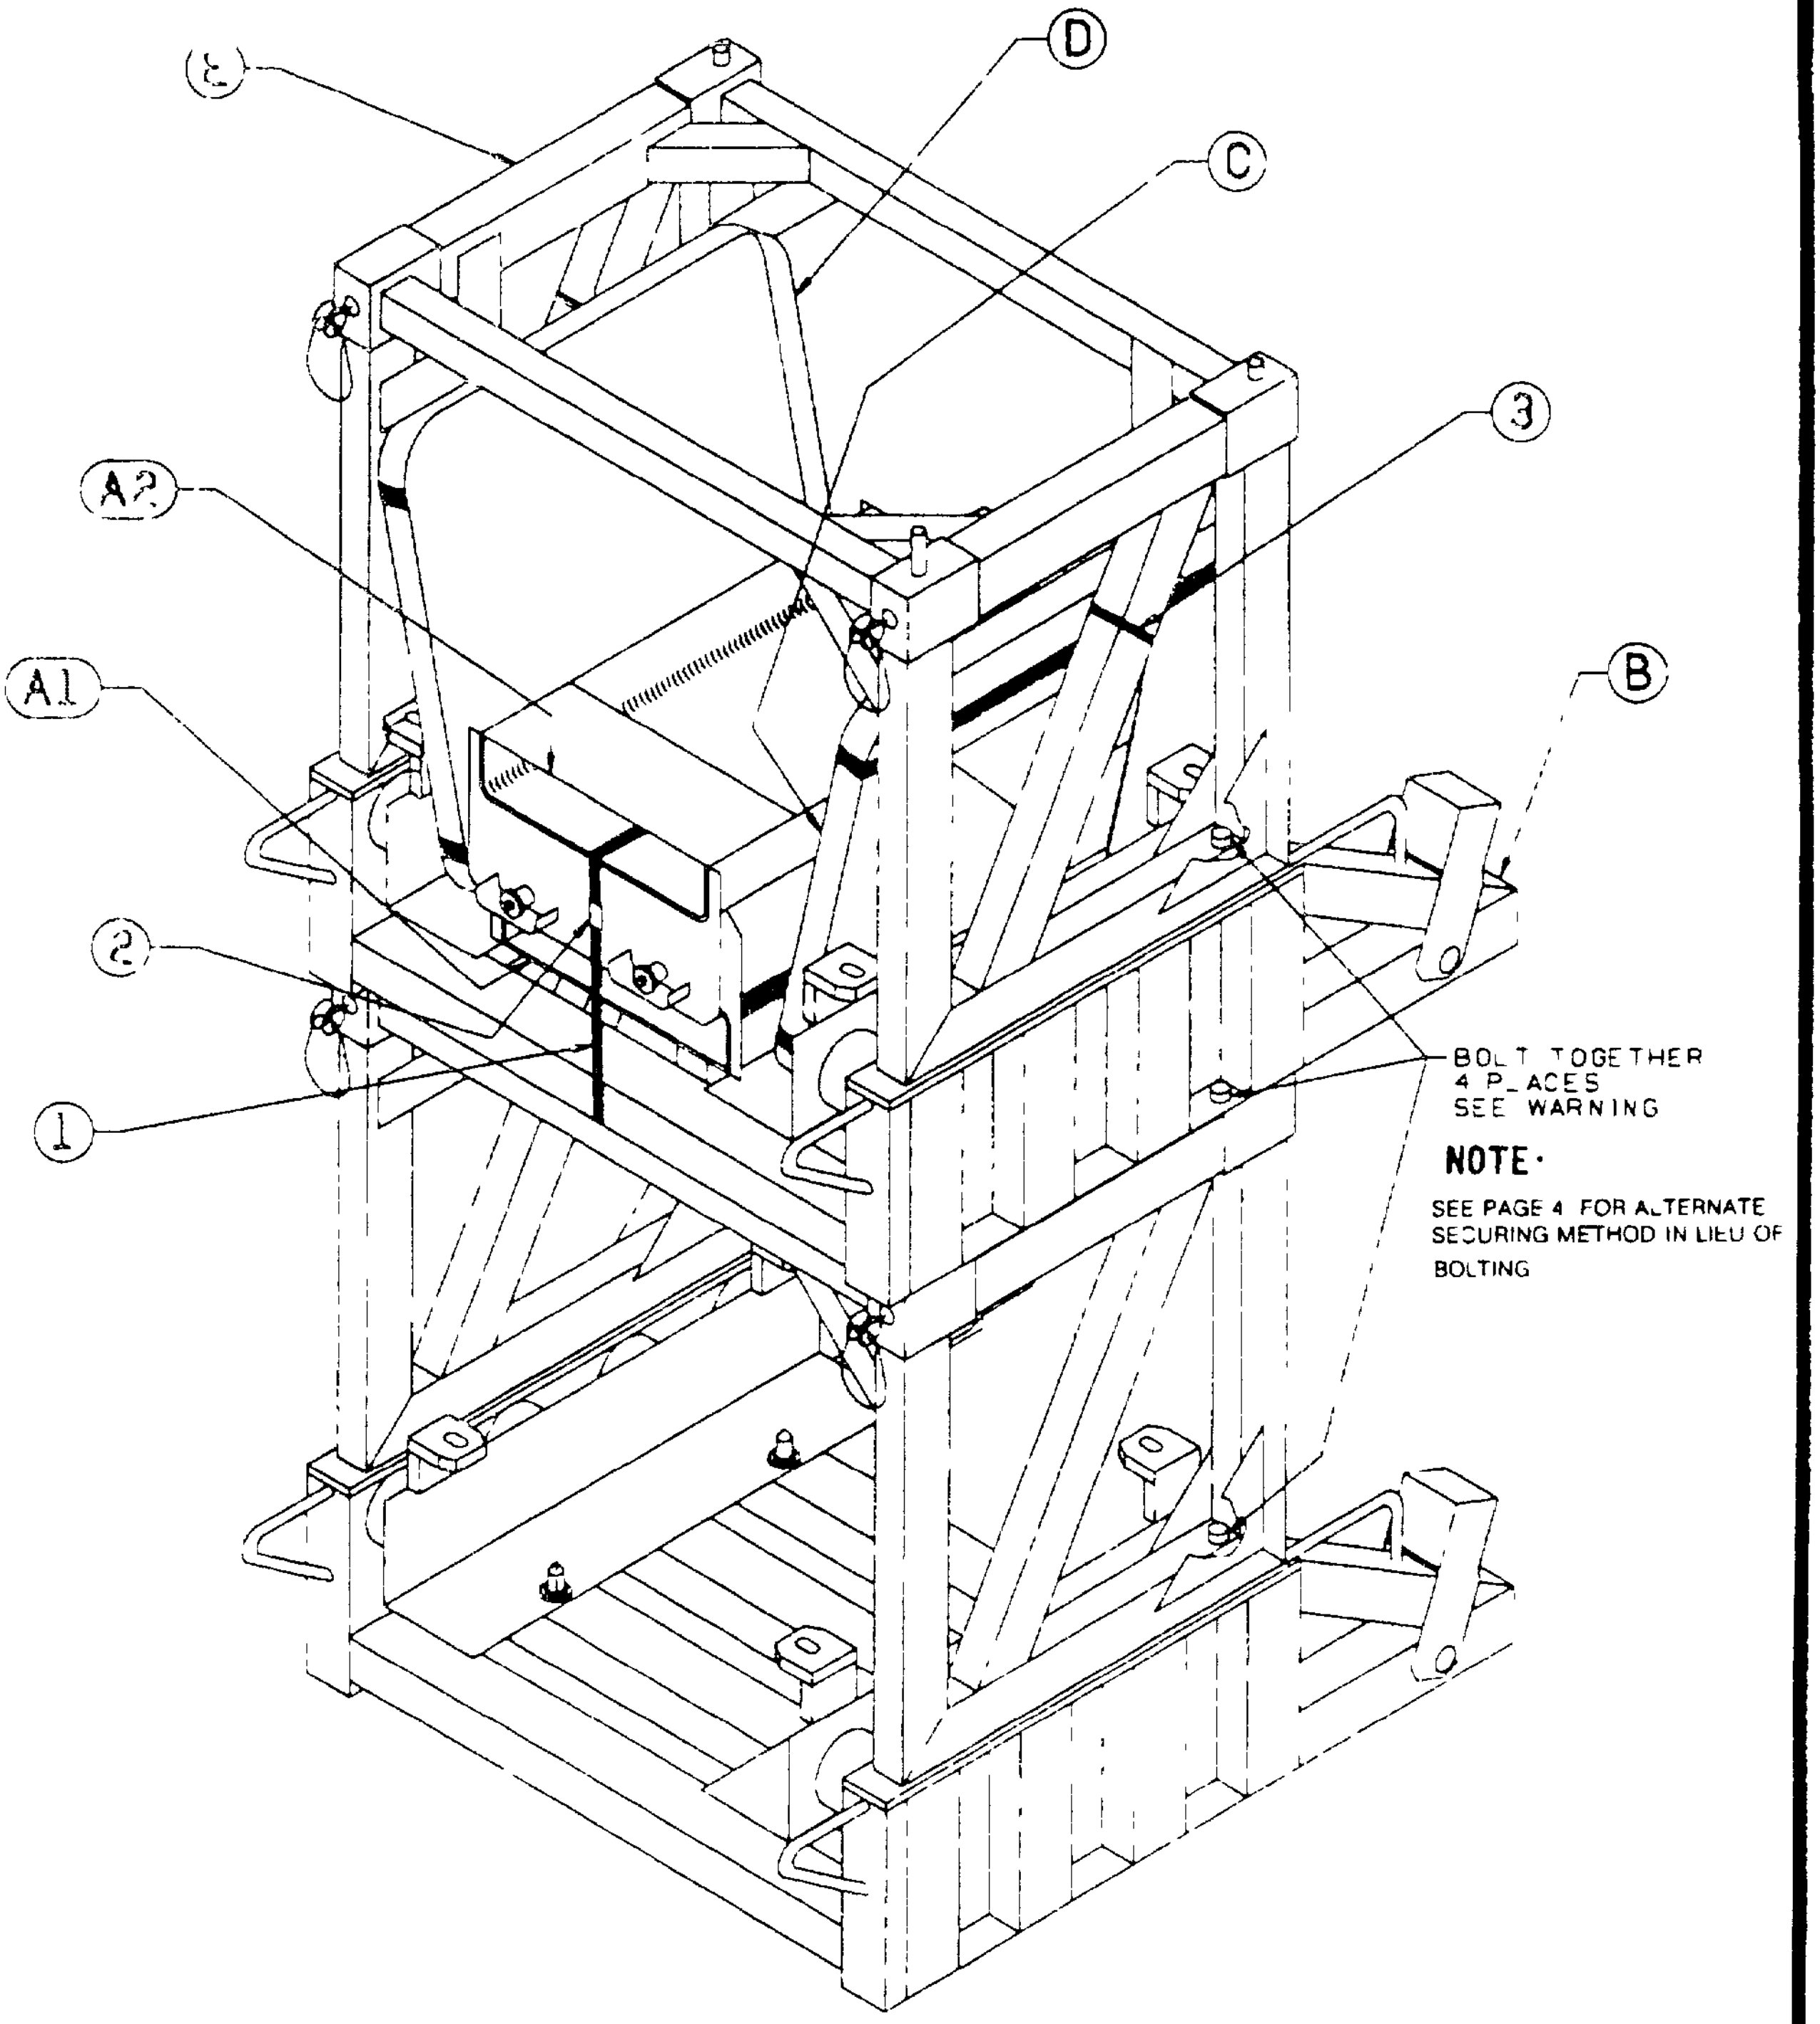

BOLT TOGETHER
4 PLACES
SEE WARNING

NOTE·

SEE PAGE 4 FOR ALTERNATE SECURING METHOD IN LIEU OF BOLTING

UNITIZING PROCEDURE

A UPPER PHST UNITIZING PROCEDURE

1 PLACE STACKING FRAME ITEM E ON SKID ITEM B BOLT STACKING FRAME AND SKID TOGETHER USING FOUR (4) BOLTS PROVIDED REPEAT FOR LOWER PHST

2 PLACE FORKLIFT ADAPTER ITEM A1 ON SKID CENTERING AS SHOWN INVERT FORKLIFT ADAPTER ITEM A2 AND PLACE ON FORKLIFT ADAPTER ITEM A1 AS SHOWN

3 SECURE BOTH FORKLIFT ADAPTERS TO SKID USING STRAP ITEM 1 THREADED UNDER SHOCK SKID AS SHOWN TENSION AND DOUBLE NOTCH WITH SEAL ITEM 2

4 TIGHTLY TENSION BOTH WEBBED TIE DOWN STRAPS OF AFT PROTECTIVE COVER ITEM C AND FWD PROTECTIVE COVER ITEM D POSITION AFT COVER (WEBBED TIE DOWNS POSITIONED HORIZONTALLY) BETWEEN OUTSIDE SURFACES OF SKID ALIGNMENT PINS AND INSIDE SURFACE OF SKID 6X6 ANGLE TILT TOP SURFACE OF COVER OUTWARD TOUCHING DIAGONAL BRACE OF STACKING FRAME AS SHOWN THREAD WIRE TIE ITEM 3 BEHIND WEBBED TIE DOWN OF COVER OUT AND AROUND DIAGONAL OF STACKING FRAME AND TENSION FIRMLY REPEAT PROCEDURE FOR FWD COVER ON OPPOSITE SIDE

B UPPER AND LOWER PHST UNITIZING PROCEDURE

1 PLACE UNITIZED UPPER PHST ON LOWER PHST STACKING FRAME AS SHOWN

2 BOLT UPPER PHST SKID TO LOWER PHST STACKING FRAME USING FOUR (4) BOLTS PROVIDED

NOTE

FOR ALTERNATE UNITIZING METHOD SEE PAGE 4

WARNING

UPPER PHST SKID MUST BE BOLTED TO LOWER PHST STACKING FRAME TO ALLOW OVERHEAD LIFTING FROM UPPER PHST LIFT RINGS

MARKING

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL STD 1323 (NAVY)

DEUNITIZING PROCEDURE

A REMOVE FOUR (4) BOLTS BETWEEN UPPER PHST SKID AND LOWER PHST STACKING FRAME

B REMOVE UNITIZED UPPER PHST FROM LOWER PHST

C CUT WIRE TIES, ITEMS 3 REMOVE AFT AND FWD PROTECTIVE COVERS

D CUT AND REMOVE STRAP, ITEM 1 REMOVE FORKLIFT ADAPTERS FROM UPPER PHST

NOTES

1 ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT MIL STD 1323 (NAVY)

2 DO NOT USE TYPE STRAPPING WITH POWER MACHINES

REQ'D	ITEM	NOMENCLATURE
2	E	FRAME CANISTER STACKING MK 5
1	D	COVER FWD PROTECTIVE MK 16
	C	COVER AFT PROTECTIVE MK 17
2	B	SKID SHOCK ISOLATION MK 27
2	A1 A2	ADAPTER CANISTER FORKLIFT MK 161

LIST OF PARTS

REQ'D	ITEM	DESCRIPTION	MAT'L	DIMENSIONS
2	3	STRAP TIE MS3367 2 9	NYLON	055 X 192 X 13 35
1	2	SEAL	STEEL	3/4 X 035
1	1	STRAP ADAPTER	STEEL	3/4 X 035 X 10 FT

LIST OF MATERIALS

ALTERNATE UNITIZING PROCEDURE

THIS METHOD IS TO BE USED ONLY WHEN THE UPPER AND [illegible] ARE SHIPPED VIA TRUCK OR RAIL AND NOT FOR UNDERWAY [illegible] MOVEMENT. THE STRAPPING METHOD SHOWN IS TO BE USED [illegible] THE HOLDING BOLTS SECURING THE PHS&T TOGETHER ARE LOST [illegible]

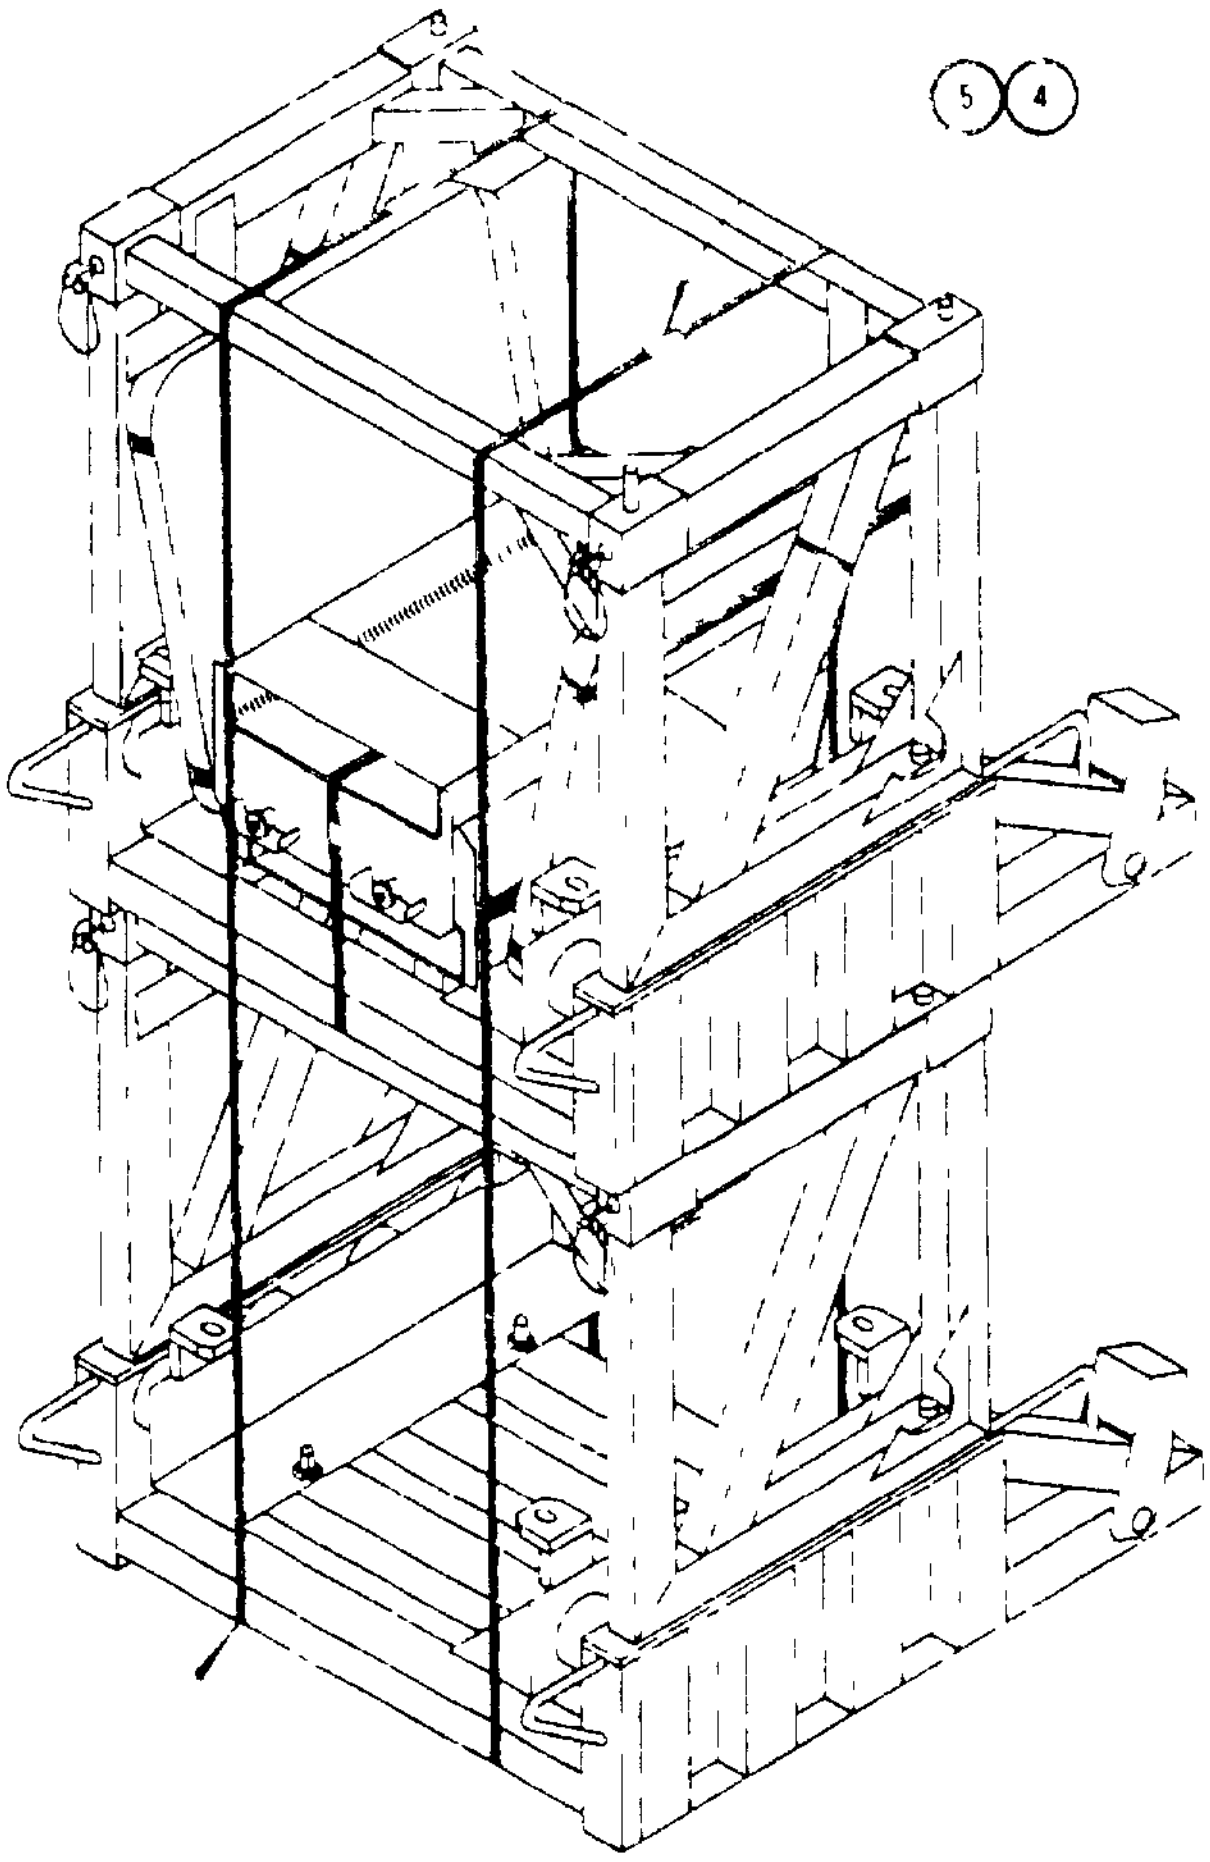

PLACE STRAPPING ITEM 4 UNDER AND OVER PHS&T IN APPROX POSITIONS SHOWN. TENSION AND DOUBLE NOTCH SEALS ITEM 5

DEUNITIZING PROCEDURE

a. CUT AND REMOVE STRAPPING HOLDING UPPER AND LOWER PHS&T TOGETHER

b. REPEAT PROCEDURES B C & D ON PAGE 2

REQ	ITEM	DESCRIPTION	MATL/DWG	DIMENSIONS
[illegible]	5	SEAL	STEEL	FOR 3/4 STRAP
	4	UNITIZING STRAP	STEEL	[illegible]

LIST OF MATERIALS

PREPARING ACTIVITY
NAVY OS
(PROJECT NO 8140 N1042)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-1323-361A, MK 14 CANISTER PHST TOMAHAWK

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1426
1 JAN 72

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-