
MIL-L-3661/6C
5 FEBRUARY 1987
SUPERSEDING
MIL-L-3661/6B
9 JUNE 1969


MILITARY SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR-LIGHTS, INDICATOR-LIGHT HOUSINGS
AND INDICATOR-LIGHT LENSES
DUSTTIGHT HOUSING, STYLE LH74

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the indicator-light housings described herein shall consist of this specification and the latest issue of MIL-L-3661.

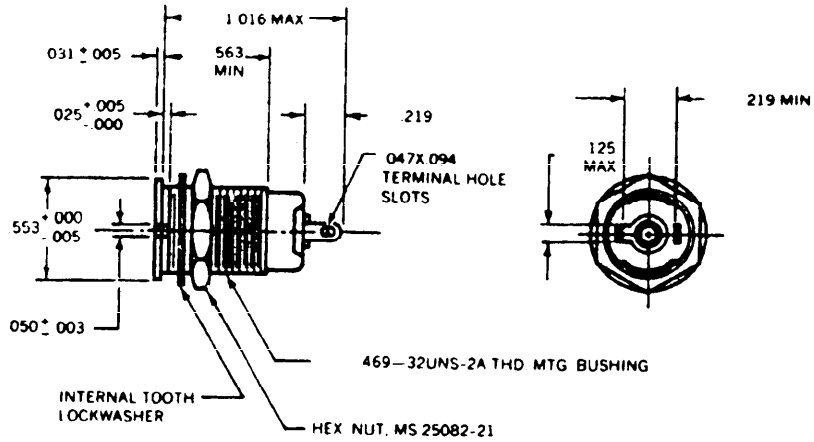



RECOMMENDED MOUNTING HOLE

inches	mm	inches	mm
.003	.08	7/32	5.56
.005	.13	.274	6.96
.025	.64	.278	7.06
.031	.79	.468	11.89
.047	1.19	15/32	11.91
.050	1.27	.472	11.99
.055	1.40	.553	14.05
.059	1.50	9/16	14.29
.094	2.39	1-1/64	25.80
1/8	3.18		

Ⓒ DENOTES CHANGES

"DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

AMSC N/A

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±.0312 inch.
2. Metric equivalents given for general information only are based upon 1 inch = 25.4mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: see figure.
2. Sand and dust: (dusttight).
3. Shank length of plug gage: 0.407 (figure 6 of MIL-L-3661).

QUALIFICATION INSPECTION:
Group submission:

TABLE I ©

Type designation	Test MIL-L-3661	Extent of approval
LH74/1	(12 sample units) All tests of Table V	All
LH74/2, LH74/6, LH47/5, LH74/7	(2 sample units) Group I of Table V Visual and mechanical examination only	

TABLE II ©

Type Designation	Internal Resistor	Mating Lense		Lamp Accommodation	
		No EMI Shield	EMI Shield		
LH74/1 3/	62K	LC13	LC28	Neon C7A (M15098/11-001) 1/	Bright
LH74/2 4/	27K	"	"	Neon C9A (M15098/11-002) 2/	Bright
LH74/5	22K	"	"	Neon C9A (M15098/11-002) 2/	Bright
LH74/6	33K	"	"	Neon C9A (M15098/11-002) 2/	Long Life
LH74/7	100K	"	"	Neon C7A (M15098/11-001) 1/	Long Life

1/Industry number: C7A(NE-2D) (102-125 AC/DC).
2/Industry number: C9A(NE-2J) (110-125AC).
3/LH74/3 replaced by LH74/1.
4/LH74/4 replaced by LH74/2.

Custodians:
Army — ME
Navy — EC
Air Force — 99

Review activities:
Army — AR, MI
Navy — AS
Air Force — 82
DLA — GS

User activities:
Army — ME
Navy — MC

Preparing activity:
Navy-EC
Agent:
DLA-GS
(Project 6210-0625)

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:50Z
Check the source to verify that this is the current version before use.