
FED. SUP CLASS
2320

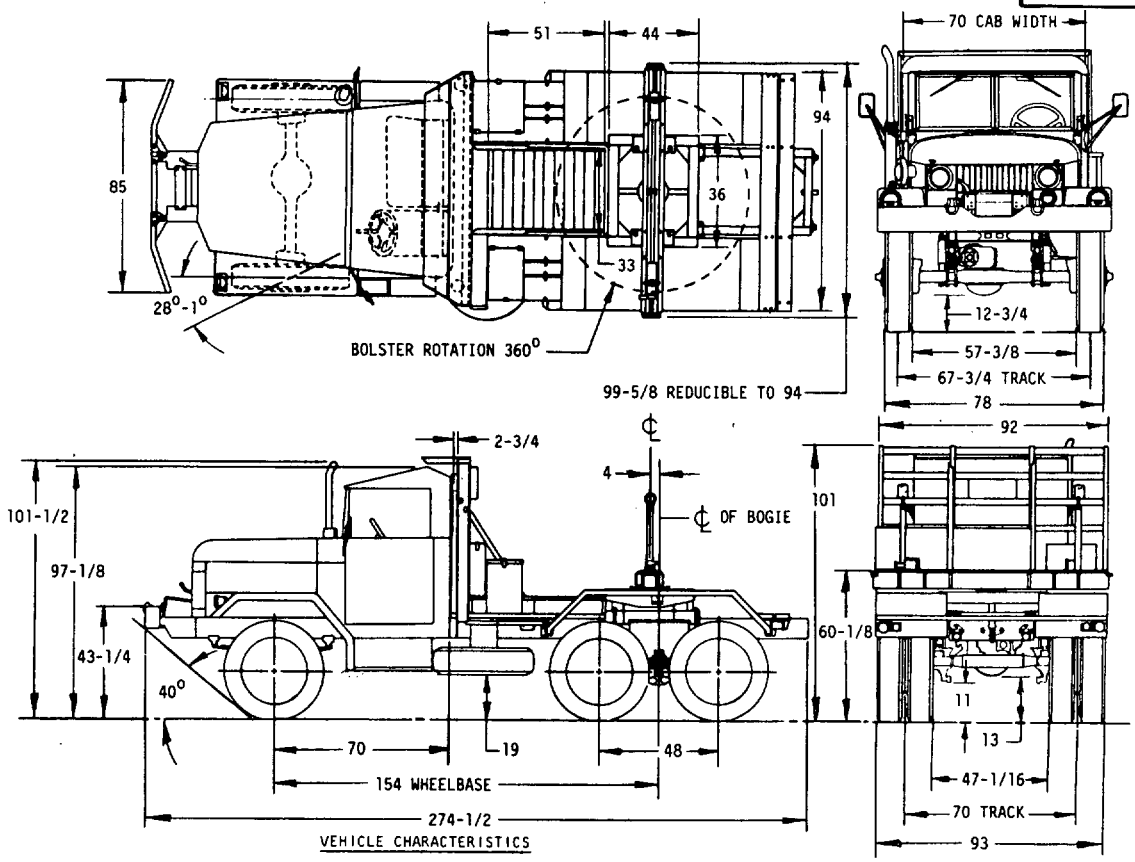

VEHICLE CHARACTERISTICS

CLASSIFICATION:

	W/W
BRIDGE CLASSIFICATION	
EMPTY	6
LOADED	8

CURB WEIGHT, FULLY EQUIPPED, LESS PAYLOAD AND CREW:

FRONT AXLE	7,000 LBS
REAR BOGIE	6,920 LBS
TOTAL	13,920 LBS

LOAD: (ON BOLSTER)

LOADED	5,000 LBS

GROSS WEIGHT, FULLY EQUIPPED, PLUS PAYLOAD LESS CREW:

FRONT AXLE	7,410 LBS
REAR BOGIE	16,510 LBS
TOTAL	23,920 LBS

(ADD 400 LBS FOR TWO MAN CREW W/EQUIPMENT)

BOLSTER TRAILER GTW:

LOADED	17,000 LBS

SHIPPING DIMENSIONS:

CU FT	1508
SQ FT	179

CENTER OF GRAVITY: CURB WT. LOADED (W/W)

ABOVE GROUND	38	47
REAR OF CENTERLINE FRONT AXLE	77	106

PERFORMANCE:

AT GROSS WEIGHT W/O TOWED LOAD	
MAXIMUM SPEED	56 MPH
MAXIMUM GRADE	60%
CRUISING RANGE (W/DIESEL FUEL)	300 MILES
AT GROSS WEIGHT W/TOWED LOAD	
MAXIMUM SPEED	56 MPH
MAXIMUM GRADE	36%
CRUISING RANGE	270 MILES

BOLSTER BODY: EQUIPPED WITH 5TH WHEEL ASSY, CONTAINING BOLSTER ASSY, CAB PROTECTOR, EQUIPMENT BOXES, LOAD BINDING HOOKS, CHAINS AND CHOCKS.

KIT PROVISIONS:

PERSONNEL HEATER (HOT WATER) (ABOVE-25°)	10937799
WINTERIZATION (ARTIC-65°)	11608963
HARD TOP CLOSURE	7085350
POWER PLANT HEATER (COOLANT)	10896394
PERSONNEL HEATER (FUEL BURNING)	11608964
ALCOHOL EVAPORATOR	10937856
SLAVE CABLE	10896518
THERMAL BARRIER	10896619
FORDING	10937874-1
"A" FRAME (W/WINCH VEHICLES)	8390117
ELECTRIC BRAKE	10937002
AIR BRAKE	10937003

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING
MS52186-1	8736768

APPROVED 3 MAY 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, BOLSTER 2-1/2 TON, 6x6, M751A2 W/W	MILITARY STANDARD MS52186(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.