MILITARY SPECIFICATION SHEET

MICROPHONE, M26542/11-01

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the microphone described herein shall consist of this specification and the latest issue of MIL-M-26542.


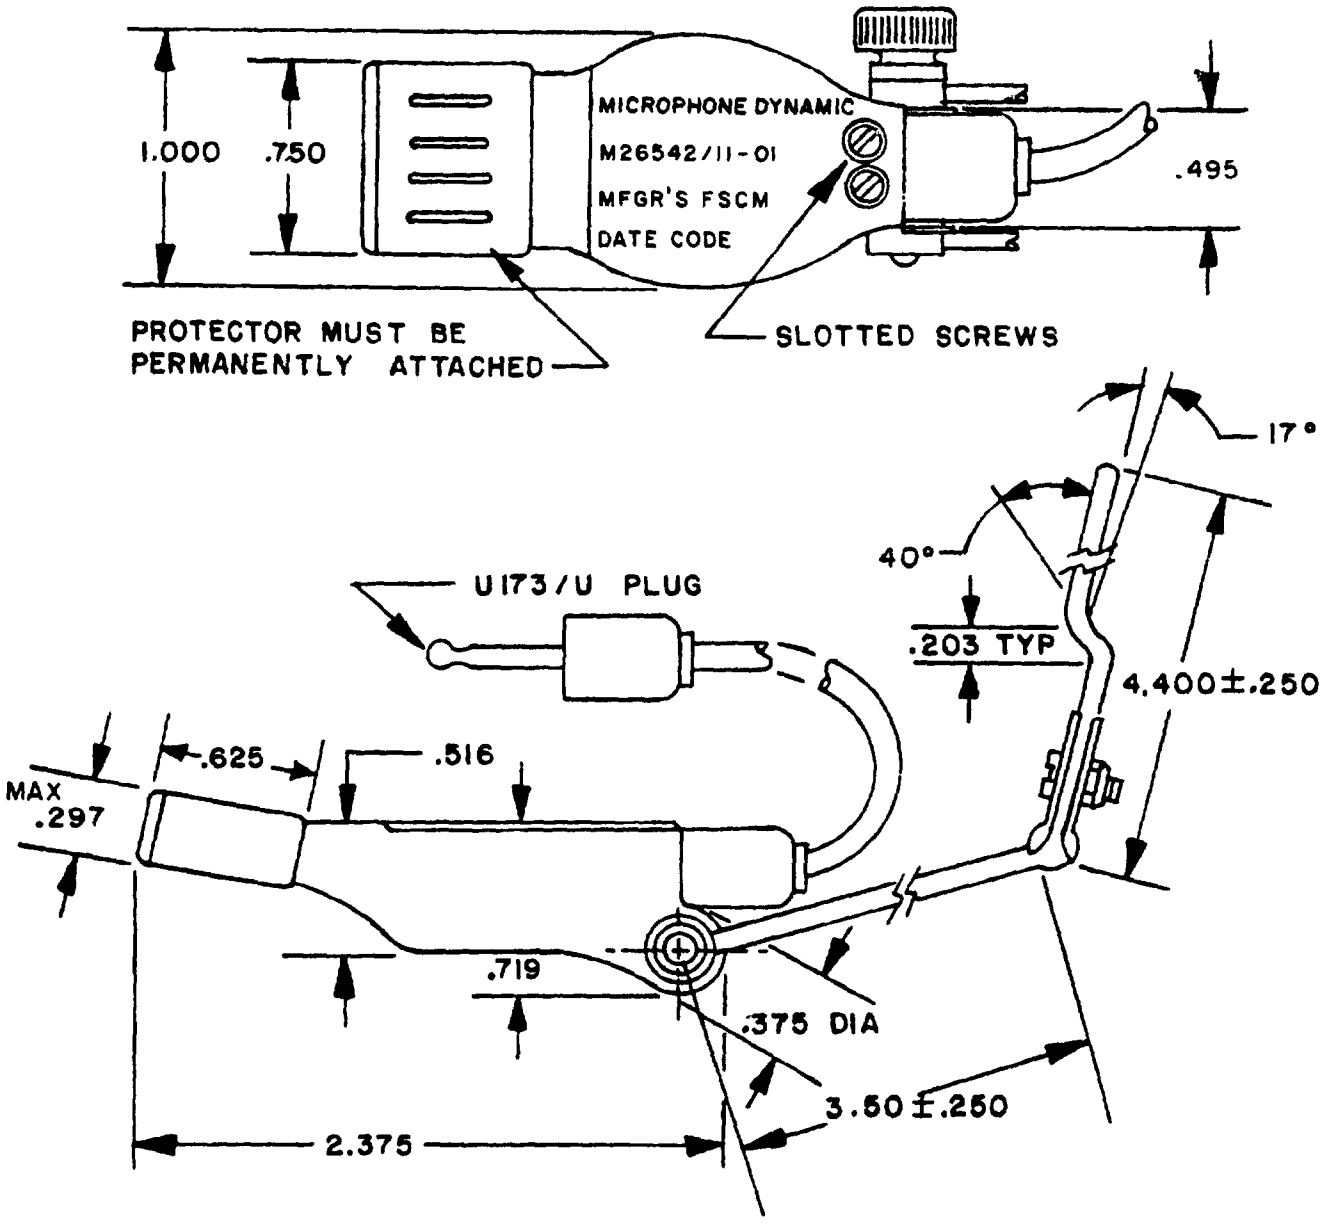


FIGURE 1. Microphone assembly.

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:56Z
Check the source to verify that this is the current version before use.

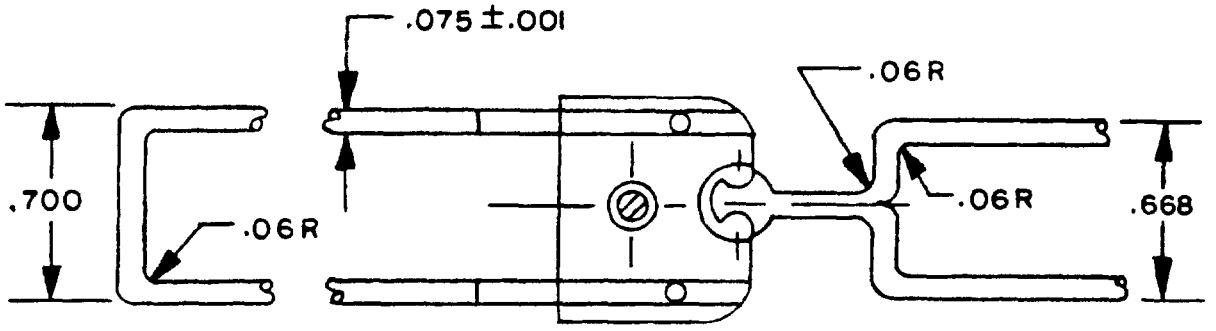

TOP VIEW OF BALL AND SOCKET JOINT

INCHES	MM	INCHES	MM
.001	0.03	.516	13.11
.015	0.38	.625	15.88
.06	1.5	.668	16.97
.075	1.91	.700	17.78
.203	5.16	.719	18.26
.250	6.35	.750	19.05
.297	7.54	1.000	25.40
.375	9.52	2.375	60.32
.495	12.57	3.500	88.90
		4.400	111.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).

FIGURE 1. Microphone assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:56Z
Check the source to verify that this is the current version before use.

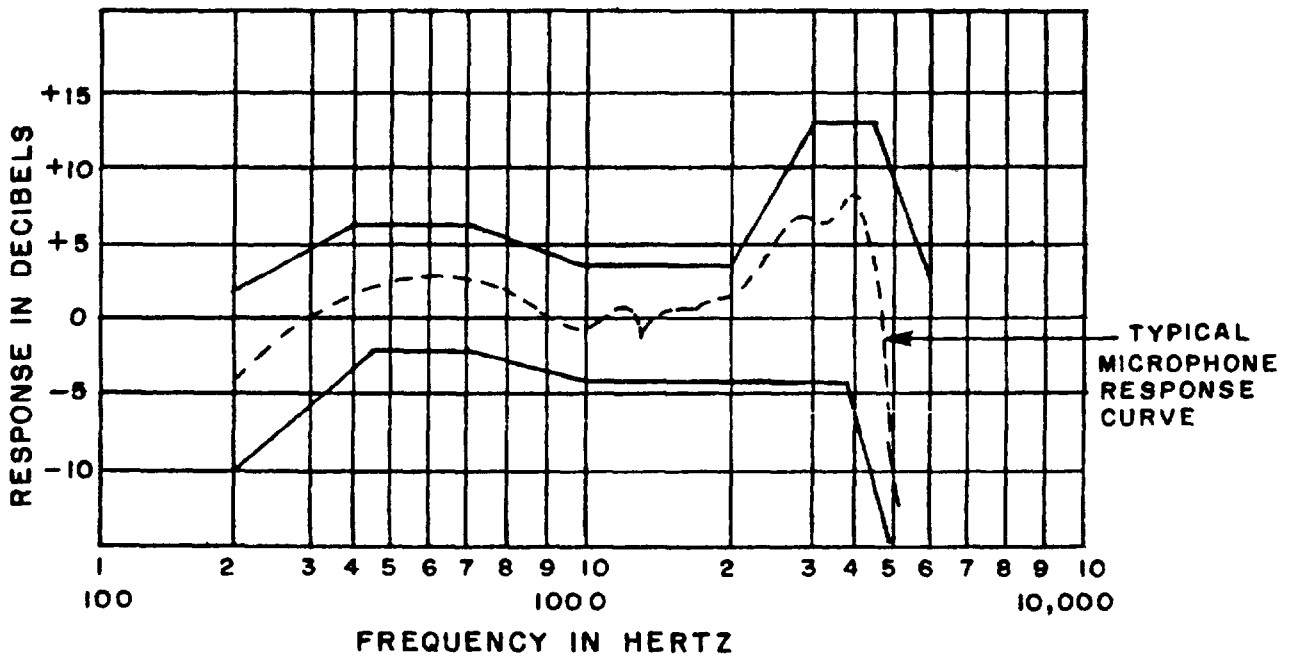


FIGURE 2. Frequency response at sea level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Color. Semigloss black, 27038 in accordance with FED-STD-595.

Component parts:

Microphone element: See figure 1.

Boom: See figure 1.

Cord assembly: M22442/36-3.

Plug assembly: U-173/U.

Weight: Not to exceed 45 grams including boom and cord assembly.

Performance

Sensitivity at ground level: 1.8 to 4.0 microvolts referred to 74 dB relative to 20 micropascals, with the microphone sound part 0.18 inch (4.7 mm) from and coaxial with the opening of the artificial voice.

Frequency response at ground level: See figure 2.

Impedance: 4-6 ohms.

Resistive load. 5 ohms.

Intended use: Microphone, dynamic M26542/11-01 is a noise-canceling dynamic microphone designed for use on a headband type headset at low altitudes. The microphone is intended for use as a part of intercommunication set AN/AIC-10 ( ) to provide communication under the noise conditions encountered in military aircraft.

The microphone assembly shall be tested in accordance with the tests listed in table I.

TABLE I. Parameter applicability.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group "A" tests	Group "B" tests	Group "C" tests
Group I						
Visual and mechanical inspection	3.1,3.4,3.5	4.7.1	X	X		
Sensitivity of ground level	3.5.1	4.7.2.2	X	X		
Sensitivity at altitude	3.5.2	4.7.2.3	X			
Frequency response at ground level	3.5.3	4.7.2.4	X	X		
Frequency response at altitude	3.5 4	4.7.2.5				
Impedance	3.5.5	4.7.3	X	X		
Noise cancellation characteristics	3.5.7.1	3.7.5.1	X			
Effect of external magnetic field	3.5.8	4.7.6	X			
Stray magnetic field	3.5.9	4.7.7	X			
Linearity	3.5.10	4.7.8	X			
Talk out	3.5.11	4.7.9	X	X		
Dielectric withstanding voltage	3.5.12	4.7.10	X			
Signal to noise	3.5.7	4.7.5	X		X	
Distortion	3.5.6	4.7.4	X		X	
Interchangeability	3.5.13	4.7.11	X		X	

- - -

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:56Z
Check the source to verify that this is the current version before use.

TABLE I. Parameter applicability - Continued.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group "A" tests	Group "B" tests	Group "C" tests
Group II						
Thermal shock	3.5.14	4.7.12	X			X
Humidity	3.5.15	4.7.13	X			X
Drop	3.5.16	4.7.14	X			X
Pressure equalization	3.5.17	4.7.15	X			X
Explosive decompression	3.5.18	4.7.16				
Salt fog	3.5.19	4.7.17	X			X
Group III						
Vibration	3.5.20	4.7.18	X			X
Bounce	3.5.21	4.7.19	X			X
Altitude	3.5.22	4.7.20				
Moisture barrier	3.5.23	4.7.21	X			X
Immersion	3.5.24	4.7.22	X			X
Group IV						
Fungus	3.5.25	4.7.23	NA			
Group V						
Gun blast	3.5.26	4.7.24	NA			

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities.
Navy - AS
Air Force - 99
DLA - ES

User activities:
Army - AR, AT, AV, ME
Navy - OS

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-0196-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:56Z
Check the source to verify that this is the current version before use.