GGG—F—626
OCTOBER 25, 1954
SUPERSEDING
Int. Fed. Spec. GGG—F—00626 (NAVY SHIPS)
30 December 1953

FEDERAL SPECIFICATION

FORK, STONE, HAND, D-HANDLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers stone forks with D-type handles.

1.1.1 *Federal Specification coverage.*—Federal Specifications do not cover all types of the commodity indicated by the titles of the specifications or which are commercially available, but are intended to cover the types ordinarily used by the Federal Government.

1.2 Classification.

1.2.1 *Sizes.*—The forks shall be of the following sizes, as specified (see 6.1):

Size 1.—8 tine.
Size 2.—10 tine.
Size 3.—12 tine.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The following specification and standard, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specification:
NN-H-81—Handles, Ash, for Tools.

Military Standard:
MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.

(Copies of Military standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.—Unless otherwise stated, the following publication, of the issue in effect on date of invitation for bids, forms a part of this specification:

Consolidated Classification Committee Publication:
Consolidated Freight Classification Rules.

(Application for copies of the Consolidated Freight Classification Rules should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Ill.)

2.3 Specifications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.—The material used in the manufacture of the forks shall be a high-grade open-hearth steel.

312304—54—No. 134

Source: https://assist.dla.mil — Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.2 Ferrule.—A tapered tubular-steel ferrule not less than 10 inches in length shall be provided. The ferrule shall have a minimum wall thickness of 0.042 inch. The longitudinal seam of the ferrule shall be closed by a continuous weld. The ferrule shall be secured to the handle by at least one nail or rivet.

3.3 Handles.—The forks shall be fitted with a D-type handle, 30 inches long, plus or minus ½ inch. Handle tops shall be of split wood, malleable iron, or a combination of wood and metal. The handle shall be of grade B white ash and shall be in accordance with Federal Specification NN–H–81.

3.4 Hardness.—The tines of the forks shall have a Rockwell C hardness of not less than 30 nor more than 35.

3.5 Dimensions.—The forks shall conform to the dimensions specified in table I.

TABLE I.—*Dimensions*

Size	Length of tine ±¼ inch	Width of fork at center ±¼ inch
	Inches	*Inches*
1	13½	10½
2	13½	9¾
3	13½	11½

3.6 Marking for identification.—Each stone fork shall be marked in a plain and permanent manner with the manufacturer's name or with a trade-mark of such known character that the source of manufacture may be readily determined.

3.7 Finish.—Exposed metal parts shall be completely covered with a durable coating of paint, enamel, lacquer, or varnish. Exposed wooden surfaces shall be completely coated with a clear, durable coating of varnish or lacquer. All coatings shall be completely dry. Wooden handles may be color stained provided that such coloring does not conceal the annual rings and does not discolor the user's hands.

3.8 Workmanship.—Workmanship shall be of the highest grade throughout and shall be free from all defects and imperfections that might affect the serviceability of the finished product.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.*—All forks of the same size, presented at one time, shall be considered a lot for purposes of acceptance, inspection, and test.

4.1.2 *Sampling for inspection.*—A random sample of forks shall be taken by the Government inspector in accordance with table II from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with lot acceptance based on the sampling inspection requirements of Military Standard MIL–STD–105.

TABLE II.—*Sampling for visual and dimensional inspection AQL (approx.) = 1.5 percent defective*

Number of forks in inspection lot	Number of forks in sample
40 and under	Inspection level III
41 to 300	Inspection level II
301 and over	Inspection level I

Note.—The Government inspector may institute tightened or reduced inspection in accordance with section 9 of Military Standard MIL–STD–105.

4.1.3 *Sampling for continuous production.*—Where there is continuous production for the Government and inspection lots include at least 200 items, sampling for Government inspection shall be conducted in accordance with Military Standard MIL–STD–105, at inspection level I and AQL = 1.5 percent defective. The type of sampling (single, double, or multiple) shall be determined by the Government inspector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

4.1.4 *Sampling for lot acceptance tests.*—A random sample of forks shall be taken by the Government inspector from each inspection lot in accordance with table III and subjected to the test specified in 4.3.

TABLE III.—*Sampling for lot acceptance tests*

Number of forks in inspection lot	Number of forks in sample	Number of items nonconforming on lot acceptance test	
		Acceptance number	Rejection number
15 and under .	3	0	1
16 to 40	5	0	1
41 to 110.....	7	0	1
111 to 300	10	0	1
301 to 500	15	1	2
501 to 800	25	2	3
801 and over ..	35	3	4

4.2 Visual and dimensional inspection.—Each of the sample forks selected in accordance with table II shall be visually and dimensionally inspected by the Government inspector to verify compliance with this specification. Any fork in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective forks in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.3 Lot acceptance test.—Each of the sample forks selected in accordance with table III shall be subjected to the tests specified in 4.4 to verify compliance with this specification. Any sample fork which does not conform to this specification shall be rejected, and if the number of nonconforming forks in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 Test procedure.

4.4.1 *Hardness.*—The hardness of alternate tines shall be measured at one point midway in the length of the tine to determine conformance with 3.4. Measurements shall be made by means of the Rockwell, Brinnell, or Vickers machine, and converted to the Rockwell scale.

4.4.2 *Handle strength.*—The tines shall be clamped as illustrated on figure 1, and the longitudinal axis of the handle shall be approximately 45 degrees to a horizontal plane. A measurement of the vertical distance "A" shall be taken. A weight of 150 pounds shall be attached to the handgrip and allowed to remain for not less than 120 nor more than 125 seconds, after which the weight shall be removed and distance "A" remeasured. The difference in distance "A" measurements is the amount of set or bend. Failure is considered to have occurred when the tool fractures, breaks, or when a permanent bend or set has exceeded 1 inch.

4.5 Rejected lots.—Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming forks. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with this specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Unless otherwise specified (see 6.1), commercial packages are acceptable.

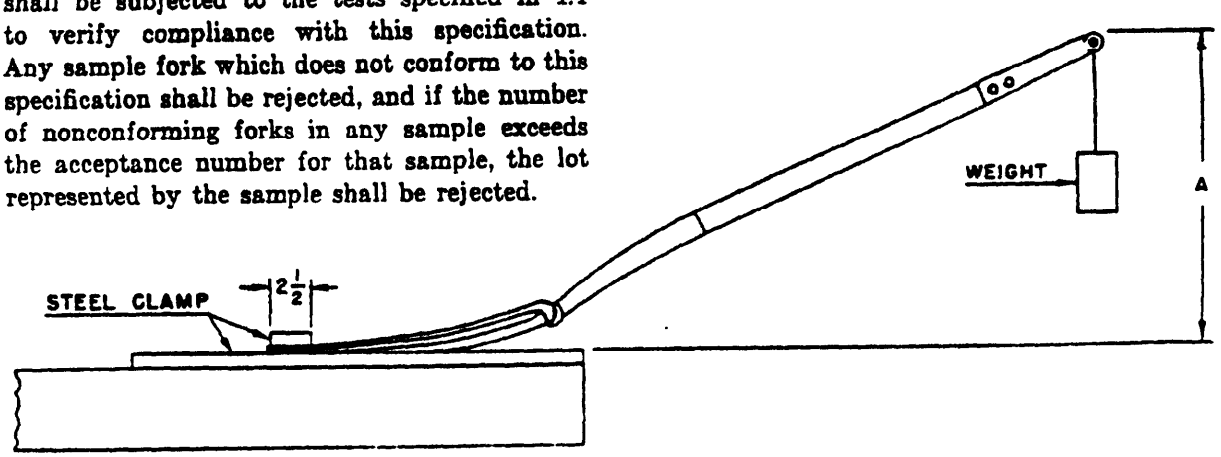


FIGURE 1.—**Handle Test.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

5.2 Packing.—Unless otherwise specified (see 6.1), the subject commodity shall be delivered in a substantial container, so constructed as to permit acceptance by common or other carrier for safe transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation to the point of delivery. The container shall conform to the Consolidated Freight Classification Rules in effect at the time of shipment and shall be capable of withstanding storage, rough handling, and reshipment without the necessity of repacking.

5.3 Marking.—Unless otherwise specified (see 6.1), shipping containers shall be marked with the name of the commodity, specification number, classification, and the quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, and the number of the contract or purchase order.

6. NOTES

6.1 Ordering data.—Procurement documents should specify the following, and purchasers should exercise any desired options offered herein (see 2.2, 5.1, 5.2, and 5.3):

(a) Title, number, and date of this specification.

(b) Size required. (See 1.2.)

(c) Whether preparation for domestic or overseas shipment is required; if domestic, the type required. (See sec. 5 and 7.2.2.)

6.2 Transportation description.—Transportation description applicable to this item is:

Forks, agricultural, hand, metal tined.
Carload weight 24,000 pounds, subject to Rule 34 Uniform Freight Classification.
Truckload weight 24,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specification, of the issue in effect on date of invitation for bids, and special requirements, forms a part of this specification for purchases made under this specification by the respective departments.

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specification.*

Military Specification:

MIL–P–15424—Packaging of Hand Tools for Domestic and Overseas Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

7.2.2 *Preparation for delivery for domestic or overseas shipment.*—Items shall be cleaned, preserved, unit protected, packaged, packed, and marked in accordance with Military Specification MIL–P–15424.

MILITARY INTEREST:

Army—E Q

Navy—Sh MC

Air Force.

U. S. GOVERNMENT PRINTING OFFICE: 1954

Copies of this specification may be purchased for 10 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.