INCH-POUND

MIL-DTL-83733/2E
31 January 2011
SUPERSEDING
MIL-C-83733/2D(USAF)
28 July 1986

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECEPTACLE, PIN CONTACT, MINIATURE, RECTANGULAR TYPE, RACK TO PANEL, STANDARD HOLE MOUNTING, ENVIRONMENT RESISTING, 200°C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83733.

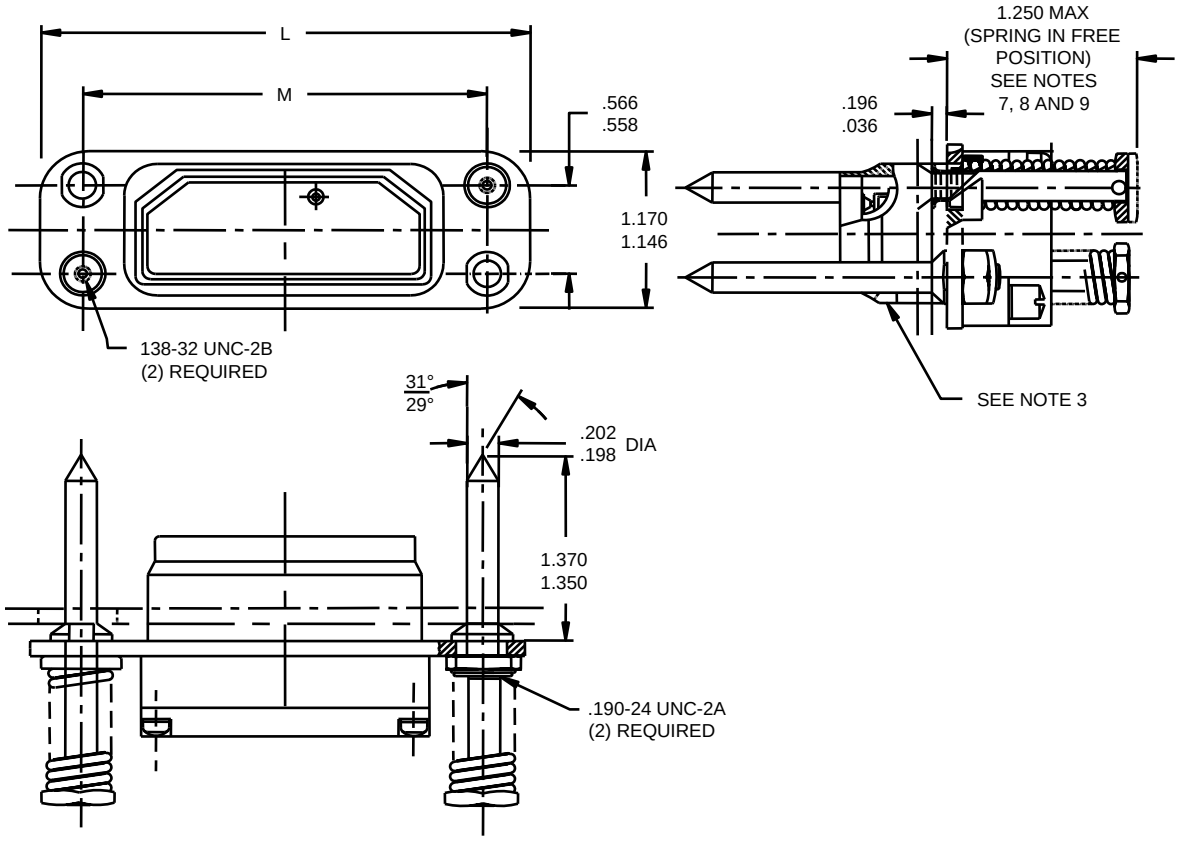


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:35Z
Check the source to verify that this is the current version before use.

Shell size	L	M
A	3.030 3.000	2.580 2.570
B	4.330 4.300	3.880 3.870

Inches	mm	Inches	mm	Inches	mm
.036	.91	.445	11.30	2.582	65.58
.138	3.51	.558	14.17	3.000	76.20
.190	4.83	.566	14.38	3.030	76.96
.196	4.98	1.146	29.11	3.870	98.30
.198	5.03	1.170	29.72	3.880	98.55
.202	5.13	1.250	31.75	4.300	109.22
.305	7.75	1.350	34.29	4.330	109.98
.315	8.00	1.370	34.80		
.430	10.92	2.574	65.38		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only and are based upon 1.00 inch equals 25.4 mm.
3. See MIL-DTL-83733 for interface and backend configuration requirements.
4. This receptacle mates with MIL-DTL-83733/3 receptacle.
5. For contacts see MIL-DTL-83733 and SAE AS39029/5, SAE AS39029/51 or SAE AS39029/57.
6. For insert arrangements see MIL-STD-1531 and MIL-STD-1532.
7. For spring mounting see MIL-DTL-83733/17.
8. Springs are pre-loaded to 25 pounds each in free position.
9. Spring forces will be 59 pounds minimum at 500 panel spacing and 88 pounds maximum at 390 panel spacing.
10. This configuration must not be used on the 185 contact layout.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:35Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-83733, this document references the following:

MIL-DTL-83733/3
MIL-DTL-83733/17
MIL-STD-1531
MIL-STD-1532
SAE AS39029/5
SAE AS39029/51
SAE AS39029/57

CONCLUDING MATERIAL

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA – CC

(Project 5935-2010-030)

Review activity:
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:35Z
Check the source to verify that this is the current version before use.