INCH POUND

A-A-59126/31B
7 January 2014
SUPERSEDING
A-A-59126/31A
22 April 2013

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD, TRIPLE TURRET (NONINSULATED, SWAGE MOUNTED) STYLE SE31

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE31 of MIL-T-55155/31 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

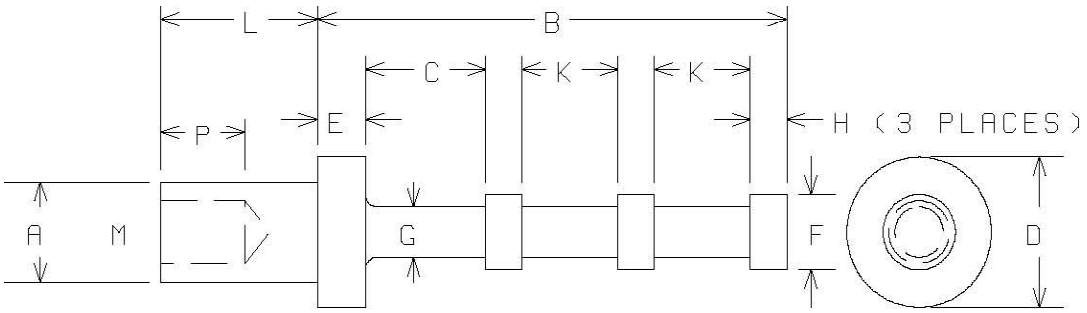


Figure 1. Drawing

Comments, suggestions, or questions on this document should be emailed to usarmy.APG.cerdec.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	Mounting board thickness (REF)	A □.002	B □.015	C □.010	D □.005	E □.005	F □.005	G □.010	H □.005	K □.005	L □.005	M □.003	P □.003
AA59126/31X-01	1/32	.090	.301	.093	.125	.023	.093	.047	.020	.062	.062	.064	.062
AA59126/31X-02		.112	.484	.156	.187	.047	.145	.065	.031	.093	.078	.076	.093
AA59126/31X-03	1/16	.090	.301	.093	.125	.023	.093	.047	.020	.062	.093	.064	.062
AA59126/31X-04		.112	.484	.156	.187	.047	.145	.065	.031	.093	.109	.076	.093
AA59126/31X-05	3/32	.090	.301	.093	.125	.023	.093	.047	.020	.062	.125	.064	.062
AA59126/31X-06		.112	.484	.156	.187	.047	.145	.065	.031	.093	.140	.076	.093
AA59126/31X-07	1/8	.090	.301	.093	.125	.023	.093	.047	.020	.062	.156	.064	.062
AA59126/31X-08		.112	.484	.156	.187	.047	.145	.065	.031	.093	.171	.076	.093
AA59126/31X-09	5/32	.112	.484	.156	.187	.047	.145	.065	.031	.093	.195	.076	.093
AA59126/31X-10	3/16	.090	.301	.093	.125	.023	.093	.047	.020	.062	.218	.064	.062
AA59126/31X-11		.112	.484	.156	.187	.047	.145	.065	.031	.093	.234	.076	.093
AA59126/31X-12	1/4	.112	.484	.156	.187	.047	.145	.065	.031	.093	.296	.076	.093

Type of mounting: swage.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Table I. Substitutability data.

Part number in A-A-59126/31	Part number in MIL-T-55155/31A
AA59126/31X-01	M55155/31-1
AA59126/31X-02	M55155/31-2
AA59126/31X-03	M55155/31-3
AA59126/31X-04	M55155/31-4
AA59126/31X-05	M55155/31-5
AA59126/31X-06	M55155/31-6
AA59126/31X-07	M55155/31-7
AA59126/31X-08	M55155/31-8
AA59126/31X-09	M55155/31-9
AA59126/31X-10	M55155/31-10
AA59126/31X-11	M55155/31-11
AA59126/31X-12	M55155/31-12

The complete part number shall include the symbol for insulation color (X denoted since non-insulated), and the symbol for material and finish IAW the requirements of CID A-A-59126.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Air Force - 85
DLA – GS

Preparing Activity:
Army - CR

Reviewer:
Air Force - 99

(Project No. 5940-2014-020)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.