
FED. SUP CLASS
2530

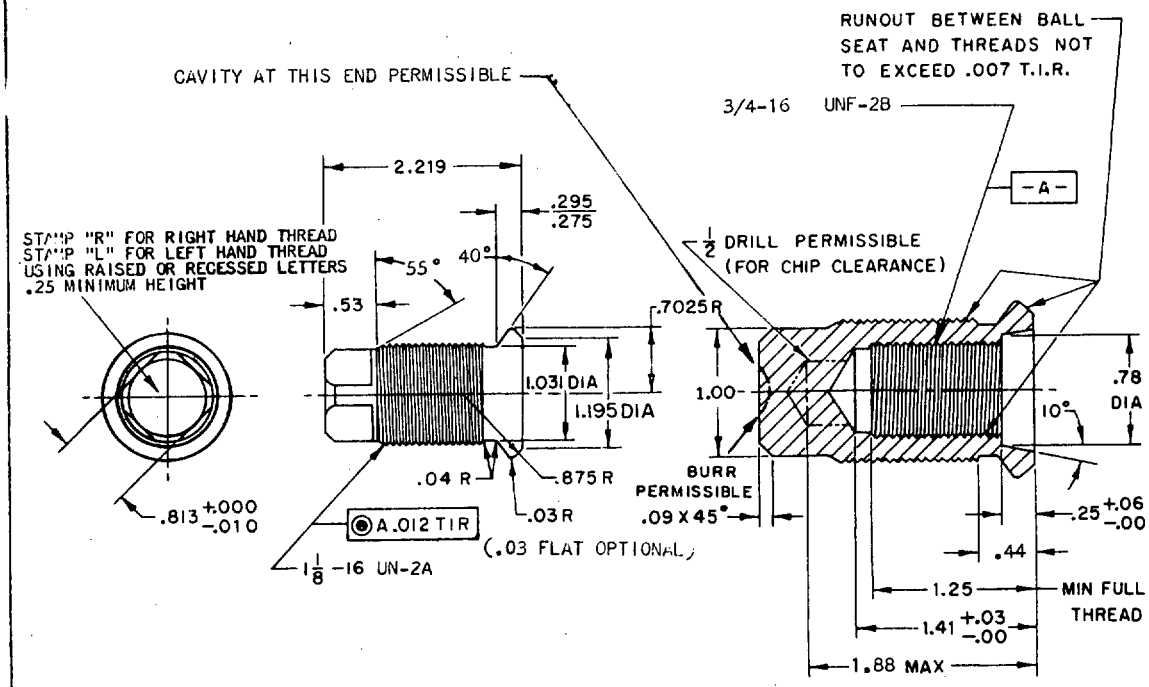

MS PART NO.	THREAD	FORMER PART NO.
MS53068-1	LEFT HAND	10896739-1
MS53068-2	RIGHT HAND	10896739-2

© REQUIREMENTS:

1. MATERIAL:

   A. ALLOY STEEL: STEEL ALLOY 4135, 4137, 4140, 5135, 5140, 8637, 8640, 8740, PER ASTM A322, A331, ASTM A545, A546, A547, A548, OR A549, OR MIL-S-46172. HARDEN AND TEMPER TO CORE HARDNESS OF BRINELL 223-277; RESTORE SURFACE CARBON, IF NECESSARY, TO PRODUCE A SURFACE HARDNESS OF 15N-78-84, OR EQUIVALENT.

   B. CARBON STEEL: SHALL CONFORM TO CHEMICAL COMPOSITION LIMITS SPECIFIED FOR GRADE 5 NUT IN SAE STANDARD J995, WITH THE EXCEPTION THAT MAXIMUM CARBON SHALL BE 0.35 PER CENT. CASE HARDEN 0.003 TO 0.008 DEEP. SURFACE HARDNESS ROCKWELL 15N-88-90 OR FILE HARD .55 PER SAE J864. 3/4 SIZE SHALL HAVE 45,000 LB MINIMUM PROOF LOAD: 1 1/8 SIZE SHALL HAVE 93,000 LB MINIMUM PROOF LOAD. PROOF LOAD STRESSES SHALL BE TESTED PER SAE STANDARD J995 OR ASTM A370.

2. PROTECTIVE FINISH: ZINC PLATE PER QQ-Z-325, TYPE II, CLASS 2, EXCEPT THREADS WHICH ARE NOT FULLY PLATED, OR CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2, HYDROGEN EMBRITTLEMENT RELIEF REQUIRED WITHIN ONE HOUR AFTER PLATING.

3. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.

4. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.010 ON DECIMALS, ±1° ON ANGULAR DIMENSIONS.

5. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

© NOTES:

1. DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER.
5. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

© DENOTES CHANGES

P.A. ARMY-AT Other Cust 99	TITLE NUT, CAP, DUAL WHEEL MOUNTING	MILITARY STANDARD MS53068
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2530-A256

REVIEW ACTIVITY: MI - CS
USER ACTIVITIES: ARMY-EL, ME, AR

APPROVED 24 FEB. 1964 REVISED (A) 10 MARCH 1971 (B) 15 NOV. 1971 © 19 October 1978

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.