


FED. SUP CLASS 5340

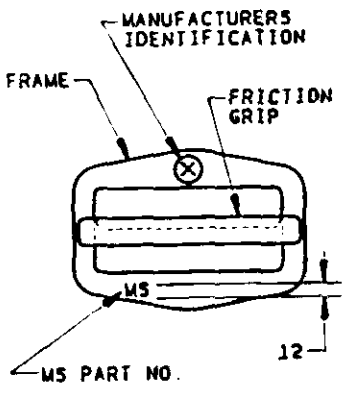

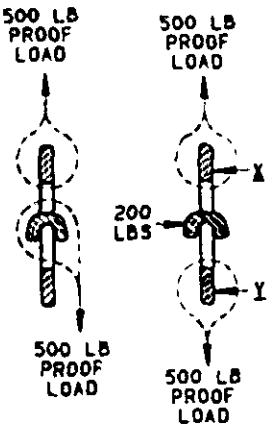


OPTIONAL METHOD OF PROOF LOAD. "X" AND "Y" ARE SUPPORTING POINTS FOR SIDE LOAD.

ADAPTER ASSEMBLY

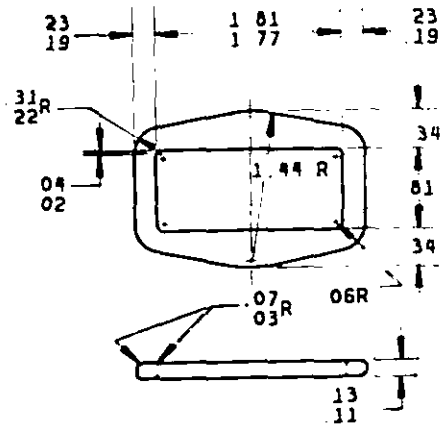

FRAME

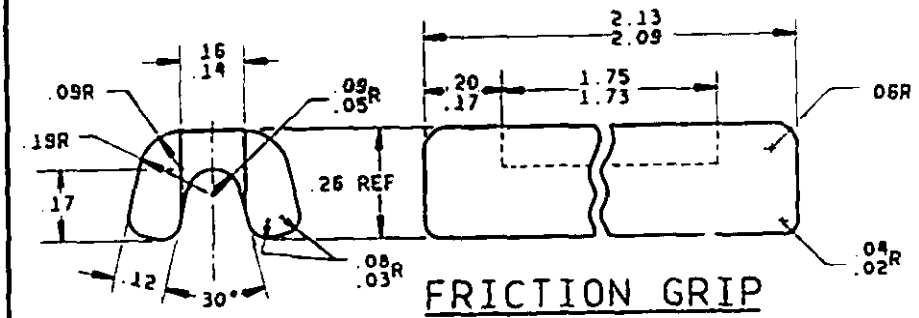

FRICTION GRIP

DASH NO.
-1
-2
-3

NOTES:

1. MATERIAL: GRIP- STEEL, MIL-S-5626, OR MIL-S-16729, OR MIL-S-6049. FRAME- STEEL, MIL-S-16728 OR MIL-S-16729.
2. HEAT TREATMENT: AFTER ASSEMBLY, 170,000 TO 190,000 LBS/SQ. IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
3. SURFACE ROUGHNESS SHALL BE 125 MAX. IN ACCORDANCE WITH ANSI B46.1.
4. ADAPTER SHALL BE SUBJECTED TO A 500 POUND PROOF LOAD AS INDICATED BY ARROWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
5. FINISH- AFTER ASSEMBLY AND HEAT TREATMENT:
   -1, CADMIUM PLATE, CLASS 1, TYPE I, QQ-P-416, } *
   -2, CADMIUM PLATE, CLASS 1, TYPE II, QQ-P-416, }
   -3, COATING, IMMERSION ZINC FLAKE/ CHROMATE DISPERSION PER MIL-C-87115, CLASS 3.
   *(AS AN ALTERNATE, THE COATING FOR THE -3 FINISH MAY BE USED FOR THE -1 & -2 FINISHES.)
6. DIMENSIONS IN INCHES. EXCEPT AS OTHERWISE SPECIFIED HEREIN, TOLERANCES ±.03, ANGLES ±2°.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
9. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 70101-1.

© REDRAWN, REVISED NOTES 1 & 5, ADDED NOTE 9, OPT. PROOF LOAD, & SHEET 2.

REVISED © 30 APRIL 1986

APPROVED

P.A. ARMY-GL; Other Cust: NAVY-AS, USAF-99	INTERNATIONAL INTEREST	TITLE: ADAPTER, REVERSIBLE, QUICK FIT, 500 LB;1-3/4 INCH	MILITARY STANDARD MS 70101
PROCUREMENT SPECIFICATION: MIL-H-7195	SUPERSEDES: QMC DWG 11-1-205, NPU DWG 598380		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5340-1647

USER ACTIVITIES:

REVIEWER ACTIVITIES: USAF-82


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all non-engineering and design applications and for reprinting use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

END ITEM EXAMINATION
DIMENSION - FUNCTION TEST

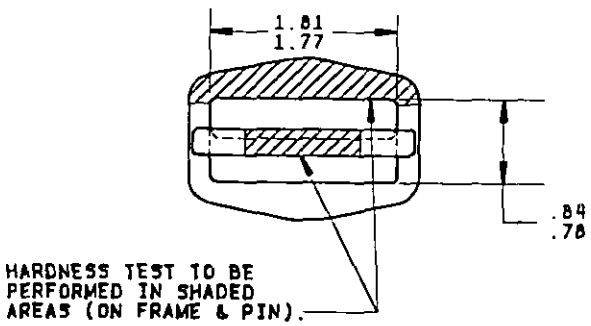

NOTES:

CRITICAL FUNCTIONAL TEST: GRIP BAR SHALL MOVE FREELY.

CRITICAL DIMENSIONS: AS SHOWN.

© THIS SHEET ADDED.

APPROVED 30 APRIL 1986 © REVISED

P. A. ARMY-GL Other Cust NAVY-AS USAF-99	INTERNATIONAL INTEREST	TITLE ADAPTER, REVERSIBLE, QUICK FIT, 500 LB;1-3/4 INCH	MILITARY STANDARD MS 70101
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: QMC DWG 11-1-205 NPU DWG 598380		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES: USAF-82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.