
FED SUP CLASS
1670

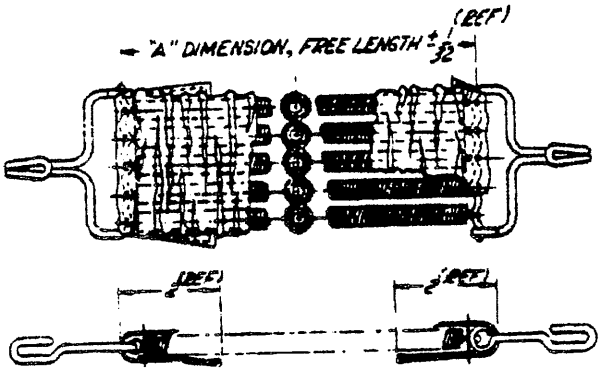

TYPICAL CONFIGURATION EXCEPT FOR -4

(8)	MS DASH NO	USAF PART NO	US NAVY PART NO	"A" DIMENSION	COLOR	SPR RATING/SPR (LBS PER INCH MIN)
	-1	46D3153-1	60A113D11-4	11 INCHES	BARE SR	.25 (REF)
	-2	46D3153-2	60A113D11-6	16-1/2 INCHES	BARE SR	.17 (REF)
	-2A	6304000-1	NONE	16-1/2 INCHES	OD-7	.17 (REF)
	-3	46D3153-3	60A113D11-5	12-1/2 INCHES	BARE SR	.22 (REF)
	-3A	6304000-2	NONE	12-1/2 INCHES	OD-7	.22 (REF)
	-4	46D3153-4	NONE	3-1/2 INCHES	BARE SR	.81 (REF)
	-5	NONE	60A113D11-1	5-1/4 INCHES	BARE SR	.54 (REF)
	-6	NONE	60A113D11-2	7-7/8 INCHES	BARE SR	.35 (REF)
	-7	NONE	60A113D11-3	9 INCHES	BARE SR	.31 (REF)
	-8	NONE	60A113D11-7	6-1/2 INCHES	BARE SR	.43 (REF)
	-9	SEE	NOTE	6-3/4 INCHES	BARE SR	.64 (REF)

MATERIALS:

1. SPRING & HOOK - STEEL, CORROSION RESISTING, COND "B", QQ-W-423
2. COVER - WEBBING, TEXTILE, NYLON, MULTIPLE TUBULAR, MIL-W-5666

(8) NOTE: FOR MANUFACTURING DETAILS, -1 THROUGH -8, SEE US NAVY DWG 60A113D11 AND USAF DWGS 46D3153 & 6304000. FOR MANUFACTURING DETAILS -9 SEE BOEING AIRPLANE CO. DRAWING 29-8674, PART NO. 29-8674-1.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

APPROVED 26 SEPT 66 REVISED (A) 25 AUG 1969 (B) 7 DEC 73

REVIEW: ARMY - AV, NAVY - AS, USAF - 11
USER: MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-GL Other Coor NAVY-AS USAF-82	TITLE BAND, SPRING, PARACHUTE PACK OPENING	MILITARY STANDARD MS 70105
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN 6515	SHEET 1 OF 1

DD FORM 672-1 (Obsolete)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.