
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WELD MOUNTING, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.

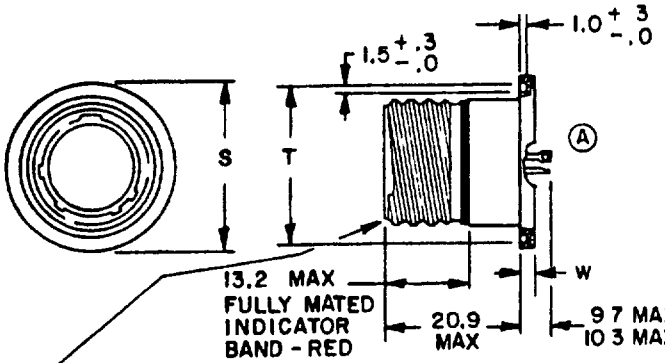

Shell size	Shell size code	S +.3 -.0	T +.0 -.3	W ±.2
9	A	24.7 (.96)	23.9 (.93)	3.2 (.12)
11	B	27.8 (1.08)	27.0 (1.05)	3.2 (.12)
13	C	31.0 (1.21)	30.2 (1.78)	3.2 (.12)
15	D	34.2 (1.33)	33.4 (1.30)	3.2 (.12)
17	E	36.4 (1.42)	35.6 (1.39)	3.2 (.12)
19	F	40.1 (1.56)	39.3 (1.53)	3.2 (.12)
21	G	43.7 (1.70)	42.9 (1.67)	3.2 (.12)
23	H	47.9 (1.87)	47.1 (1.84)	4.0 (.16)
25	J	50.1 (1.95)	49.3 (1.92)	4.0 (.16)

NOTE: Dimensions are in millimeters.

FIGURE 1. Receptacle, classes N and Y

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with: DOD-C-38999/26.

Eyelet contact termination available in size 16 and 20 only.

For insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 27 Y A 35 P N

- DOD No. prefix
- Specification sheet No.
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:
  - N is required for normal position

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3367-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.