THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

1. APPLICATION AND DESIGN SELECTION: THESE A.R.E. (ATTACHED RETENTION ELEMENT) NUT ELEMENTS SHALL BE SELECTED AND USED IN ACCORDANCE WITH MS33588.

2. MILITARY INSTALLATION AND TOOLS: NONE

3. GENERAL REQUIREMENTS:

3.1 ASSEMBLED NUT ELEMENTS SHALL MEET THE TEST REQUIREMENTS OF MIL-N-25027.

3.2 MATERIAL:

(A) 3.2.1 NUT ELEMENT: STEEL AISI 1050 (UNS G10500) PER AMS 5085 OR AISI 4130 (UNS G41300) PER AMS 6351.

3.3 HEAT TREAT:

(A) 3.3.1 NUT ELEMENT: HRc 49 MAX.

3.4 COATING:

3.4.1 NUT ELEMENT SHALL BE CADMIUM PLATED PER QQ-P-416, TYPE AND CLASS OPTIONAL PROVIDED THE ELEMENT MEETS THE SALT SPRAY REQUIREMENTS OF MIL-N-25027.

3.5 LUBRICANT:

(A) 3.5.1 NUT ELEMENT SHALL BE DRY FILM LUBRICATED PER MIL-L-46010, TYPE I.

3.6 SURFACE TEXTURE:

(A) 3.6.1 SURFACE TEXTURE IN ACCORDANCE WITH ANSI/ASME B46.1. UNLESS OTHERWISE SPECIFIED, THE SURFACE ROUGHNESS SHALL NOT EXCEED 125 MICRO INCHES.

3.7 NUT REPLACEABILITY:

3.7.1 THE NUT ELEMENT SHALL BE CAPABLE OF BEING SNAPPED INTO AND REMOVED FROM A.R.E. MS14200 AND MS14201 NUT ASSEMBLIES USING THE PROPER PROCEDURES AND TOOLING.

3.8 WORKMANSHIP:

3.8.1 BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

3.8.2 DIMENSIONS ARE IN INCHES.

3.8.3 TOLERANCES: DECIMALS ±.010, ANGLES ±.5° UNLESS OTHERWISE SPECIFIED.

(A) DENOTES CHANGE(S)

INCH-POUND

PREPARING ACTIVITY: DLA-IS CUSTODIANS: ARMY- AR NAVY- AS AIR FORCE- 11 DLA- REVIEW: MI, AV, SH, 82, 99 USER: PROJECT NUMBER: 5310-2009	MILITARY SPECIFICATION SHEET TITLE NUT ELEMENT, ATTACHED RETENTION ELEMENT (A.R.E.), 450°F, STEEL (AISI 1050 OR 4130), 125 KSI Ftu	SPECIFICATION SHEET NUMBER MS14214 30 SEPT 94 REV A SUPERSEDING MS14214 21 DEC 83 AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 1 of 3


DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

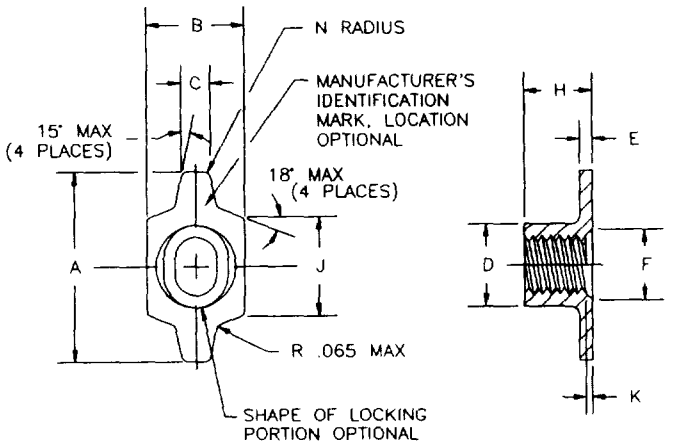

5. TABLE I

SIZE DASH NO. (a)	SIZE MIL-S-8879	A ± .010	B MAX.	C ± .010	D MAX.	E +.010 −.000	F MIN.	H MAX.	J ± .010	K REF.	N MAX.	AXIAL STRENGTH LBS. MIN.
04	.1120-40 UNJC-3B	.420	.245	.070	.165	.025	.116	.151	.224	.015	.018	750
06	.1380-32 UNJC-3B	.420	.245	.070	.195	.025	.142	.151	.224	.015	.018	1130
08	.1640-32 UNJC-3B	.525	.350	.110	.225	.032	.168	.182	.295	.018	.040	1720
3	.1900-32 UNJF-3B	.525	.350	.110	.250	.032	.194	.182	.295	.018	.040	2460
4	.2500-28 UNJF-3B	.620	.435	.125	.325	.040	.254	.240	.367	.020	.040	4580

(a) NUT ELEMENT DASH NO. IS THE SAME AS ASSEMBLY DASH NO.

PREPARING ACTIVITY: DLA-IS CUSTODIANS: ARMY- AR NAVY- AS AIR FORCE- 11 DLA- REVIEW: MI, AV, SH, 82, 99 USER: PROJECT NUMBER: 5310-2009	MILITARY SPECIFICATION SHEET TITLE NUT ELEMENT, ATTACHED RETENTION ELEMENT (A.R.E.), 450°F, STEEL (AISI 1050 OR 4130), 125 KSI Ftu	SPECIFICATION SHEET NUMBER MS14214 30 SEPT 94 REV A SUPERSEDING MS14214 21 DEC 83 AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

Form Approved
OMB No. 0704-0188

6. PART NUMBER EXAMPLE:

MS14214 - 08

- 08: SIZE DASH NUBER (.1640-32 UNJC-3B)
- MS14214: MILITARY SPECIFICATION SHEET NUMBER

7. ADMINISTRATIVE AND CONTRACTUAL PROVISIONS:

(A) 7.1 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THS DOCUMENT SHALL TAKE PRECEDENCE.

(A) 7.2 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

7.3 NUT ELEMENTS WITHOUT MANUFACTURER'S IDENTIFICATION MAY BE FURNISHED FROM MANUFACTURER'S STOCK UNTIL DECEMBER 31, 1985.

PREPARING ACTIVITY: DLA-IS CUSTODIANS: ARMY- AR NAVY- AS AIR FORCE- 11 DLA- REVIEW: MI, AV, SH, 82, 99 USER: PROJECT NUMBER: 5310-2009	MILITARY SPECIFICATION SHEET TITLE NUT ELEMENT, ATTACHED RETENTION ELEMENT (A.R.E.), 450°F, STEEL (AISI 1050 OR 4130), 125 KSI Ftu	SPECIFICATION SHEET NUMBER MS14214 30 SEPT 94 REV A SUPERSEDING MS14214 21 DEC 83 AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 3 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.