


FED SUP CLASS
5306

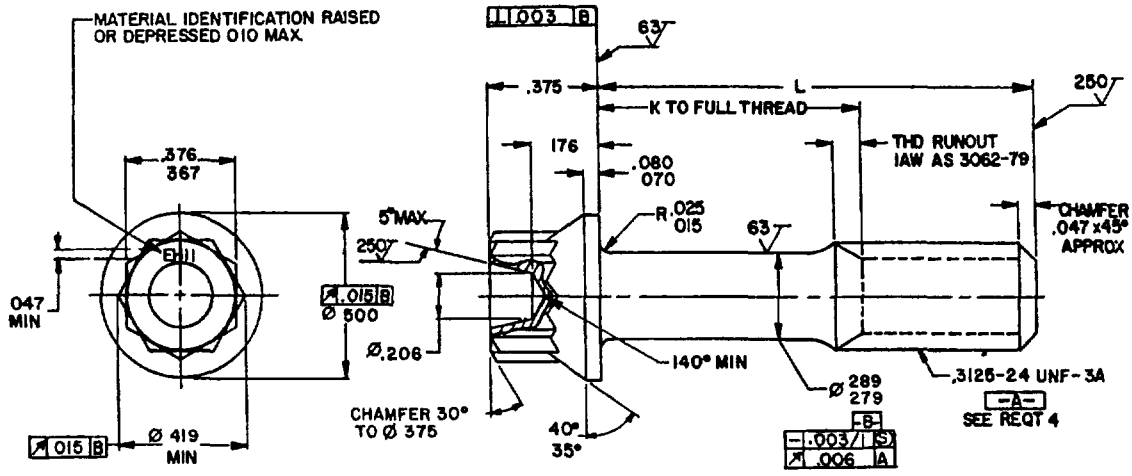



SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

INACTIVE FOR DESIGN AFTER 28 FEB 1984
FOR PARTS WITH MIL-S-8879 SCREW THREADS SEE MS9916

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K +.000 -.060	APPROX WEIGHT LBS/100
-05	562	1/	2.21
-06	.625	1/	2.28
-07	688	1/	2.39
-08	750	1/	2.51
-09	.812	1/	2.62
-10	.875	1/	2.73
-11	.938	1/	2.85
-12	1.000	.125	2.96
-13	1.062	188	3.07
-14	1.125	.250	3.19
-15	1.188	.312	3.30
-16	1.250	.375	3.41
-17	1.312	.438	3.52
-18	1.375	.500	3.64
-19	1.438	.562	3.75
-20	1.500	.625	3.87
-21	1.562	.688	3.98
-22	1.625	.750	4.10
-23	1.688	.812	4.22
-24	1.750	.875	4.33
-25	1.875	1.000	4.55
-26	2.000	1.125	4.77
-27	2.125	1.250	5.00
-28	2.250	1.375	5.23
-29	2.375	1.500	5 45
-30	2.500	1.625	5.67
-31	2 625	1.750	5.90
-32	2 750	1.875	6.13
-33	2 875	2.000	6 36
-34	3.000	2.125	6.58
-35	3.125	2.250	6.80
-36	3.250	2.375	7.03
-37	3.375	2.500	7.27
-38	3.500	2.625	7.50
-39	3.625	2.750	7.73
-40	3.750	2.875	7 95
-41	3.875	3.000	8.17
-42	4.000	3.125	8.40
-43	4.125	3.250	8.63
-44	4.250	3.375	8.86
-45	4.375	3.500	9.08
-46	4.500	3.625	9.30
-47	4.625	3.750	9.52
-48	4.750	3.875	9.74
-49	4.875	4.000	9.95
-50	5.000	4.125	10.17
-51	5 125	4.250	10.40
-52	5.250	4.375	10.63
-53	5.375	4.500	10.86
-54	5.500	4.625	11.10
-55	5.625	4.750	11.33
-56	5.750	4.875	11.56
-57	5.875	5.000	11.78
-58	6.000	5.125	12.00

1/ THREAD TO HEAD. MAXIMUM TWO INCOMPLETE THREADS

Ⓑ ENTIRE STANDARD REVISED

APPROVED 5 AUG 57 REVISED Ⓐ 28 FEB 84 Ⓑ 4 NOV 86

P A NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, 12 POINT HEAD, STEEL, 3125-24 UNF-3A	MILITARY STANDARD MS9148
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1146

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense for selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: STEEL IN ACCORDANCE WITH AMS 6322-80.
2. FINISH: CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80. DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. HARDNESS: 26-32HRC.
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
6. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS870.
7. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI B46.1.
8. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83.
9. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm$ .010, ANGULAR DIMENSIONS $\pm$ 5°.
10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9148-05

- 05 — DASH NUMBER
- MS9148 — BASIC MS NUMBER

MS9148-05 INDICATES: BOLT, MACHINE, 12 POINT HEAD, STEEL; .3125-24 UNF-3A; LENGTH .562.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 5 AUG 57 REVISED (A) 28 FEB 84 (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P A NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, 12 POINT HEAD, STEEL, .3125-24 UNF-3A	MILITARY STANDARD MS9148
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.