
MS9837

FED. SUP CLASS 5307

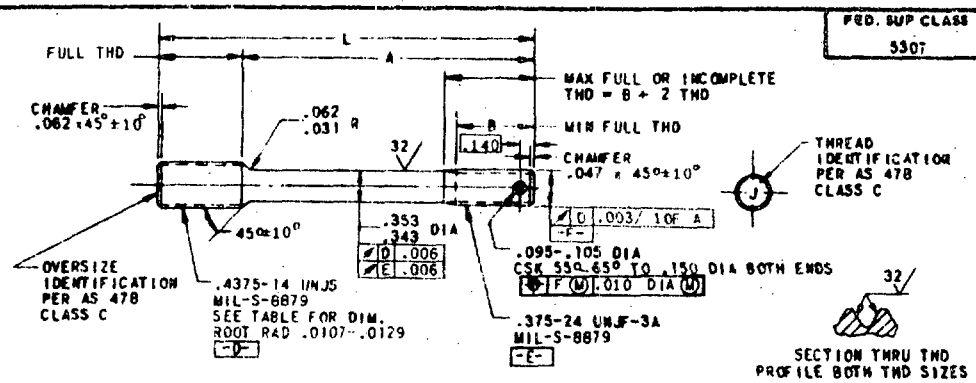

OVERSIZE IDENTIFICATION			STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)	STANDARD
MAJOR DIAMETER			.433-.438	.433-.438	.433-.438	.442-.447	.442-.447	APPROX WEIGHT LBS/100
PD BEFORE PLATING			.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087	
PD AFTER PLATING			.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097	
PD LEAD THREAD			.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031	
MINOR DIA			.3559-.3616	.3588-.3646	.3618-.3676	.3648-.3706	.3678-.3736	
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
1.562	.688	.562	MS9837-011	MS9837-012	MS9837-013	MS9837-014	MS9837-015	4.85
1.625	.750	.625	MS9837-016	MS9837-017	MS9837-018	MS9837-019	MS9837-020	5.02
1.688	.812	.688	MS9837-021	MS9837-022	MS9837-023	MS9837-024	MS9837-025	5.18
1.750	.875	.688	MS9837-026	MS9837-027	MS9837-028	MS9837-029	MS9837-030	5.35
1.812	.938	.688	MS9837-031	MS9837-032	MS9837-033	MS9837-034	MS9837-035	5.52
1.875	1.000	.688	MS9837-036	MS9837-037	MS9837-038	MS9837-039	MS9837-040	5.69
1.938	1.062	.688	MS9837-041	MS9837-042	MS9837-043	MS9837-044	MS9837-045	5.86
2.000	1.125	.688	MS9837-046	MS9837-047	MS9837-048	MS9837-049	MS9837-050	6.03
2.062	1.188	.688	MS9837-051	MS9837-052	MS9837-053	MS9837-054	MS9837-055	6.19
2.125	1.250	.688	MS9837-056	MS9837-057	MS9837-058	MS9837-059	MS9837-060	6.36
2.188	1.312	.688	MS9837-061	MS9837-062	MS9837-063	MS9837-064	MS9837-065	6.53
2.250	1.375	.688	MS9837-066	MS9837-067	MS9837-068	MS9837-069	MS9837-070	6.70
2.312	1.438	.688	MS9837-071	MS9837-072	MS9837-073	MS9837-074	MS9837-075	6.87
2.375	1.500	.688	MS9837-076	MS9837-077	MS9837-078	MS9837-079	MS9837-080	7.04
2.438	1.562	.688	MS9837-081	MS9837-082	MS9837-083	MS9837-084	MS9837-085	7.21
2.500	1.625	.688	MS9837-086	MS9837-087	MS9837-088	MS9837-089	MS9837-090	7.37
2.562	1.688	.688	MS9837-091	MS9837-092	MS9837-093	MS9837-094	MS9837-095	7.54
2.625	1.750	.688	MS9837-096	MS9837-097	MS9837-098	MS9837-099	MS9837-100	7.71
2.750	1.875	.688	MS9837-101	MS9837-102	MS9837-103	MS9837-104	MS9837-105	8.05
2.875	2.000	.688	MS9837-106	MS9837-107	MS9837-108	MS9837-109	MS9837-110	8.38
3.000	2.125	.688	MS9837-111	MS9837-112	MS9837-113	MS9837-114	MS9837-115	8.72
3.125	2.250	.688	MS9837-116	MS9837-117	MS9837-118	MS9837-119	MS9837-120	9.06
3.250	2.375	.688	MS9837-121	MS9837-122	MS9837-123	MS9837-124	MS9837-125	9.40
3.375	2.500	.688	MS9837-126	MS9837-127	MS9837-128	MS9837-129	MS9837-130	9.73
3.500	2.625	.688	MS9837-131	MS9837-132	MS9837-133	MS9837-134	MS9837-135	10.07
3.625	2.750	.688	MS9837-136	MS9837-137	MS9837-138	MS9837-139	MS9837-140	10.41
3.750	2.875	.688	MS9837-141	MS9837-142	MS9837-143	MS9837-144	MS9837-145	10.74
3.875	3.000	.688	MS9837-146	MS9837-147	MS9837-148	MS9837-149	MS9837-150	11.08
4.000	3.125	.688	MS9837-151	MS9837-152	MS9837-153	MS9837-154	MS9837-155	11.42
4.125	3.250	.688	MS9837-156	MS9837-157	MS9837-158	MS9837-159	MS9837-160	11.75
4.250	3.375	.688	MS9837-161	MS9837-162	MS9837-163	MS9837-164	MS9837-165	12.09
4.375	3.500	.688	MS9837-166	MS9837-167	MS9837-168	MS9837-169	MS9837-170	12.43
4.500	3.625	.688	MS9837-171	MS9837-172	MS9837-173	MS9837-174	MS9837-175	12.76
4.625	3.750	.688	MS9837-176	MS9837-177	MS9837-178	MS9837-179	MS9837-180	13.10
4.750	3.875	.688	MS9837-181	MS9837-182	MS9837-183	MS9837-184	MS9837-185	13.44
4.875	4.000	.688	MS9837-186	MS9837-187	MS9837-188	MS9837-189	MS9837-190	13.77
5.000	4.125	.688	MS9837-191	MS9837-192	MS9837-193	MS9837-194	MS9837-195	14.11

1. MATERIAL: STEEL, AMS 6320, AMS 6322 OR AMS 6327
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966.
6. MANUFACTURING SPECIFICATION: AMS 7456 EXCEPT THREAD FORM.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010.
10. MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION ON CONTAINER.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 27 Aug 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS	TITLE STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, STEEL .4375-14 UNJS x .375-24 UNJF	MILITARY STANDARD MS9837
PROCUREMENT SPECIFICATION AMS7456	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Dept. of the Air Force and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activities: Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.