AS400

METRIC
DOD-C-38999/20B
5 October 1984
SUPERSEDING
DOD-C-38999/20A
29 October 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WALL MOUNTING FLANGE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.

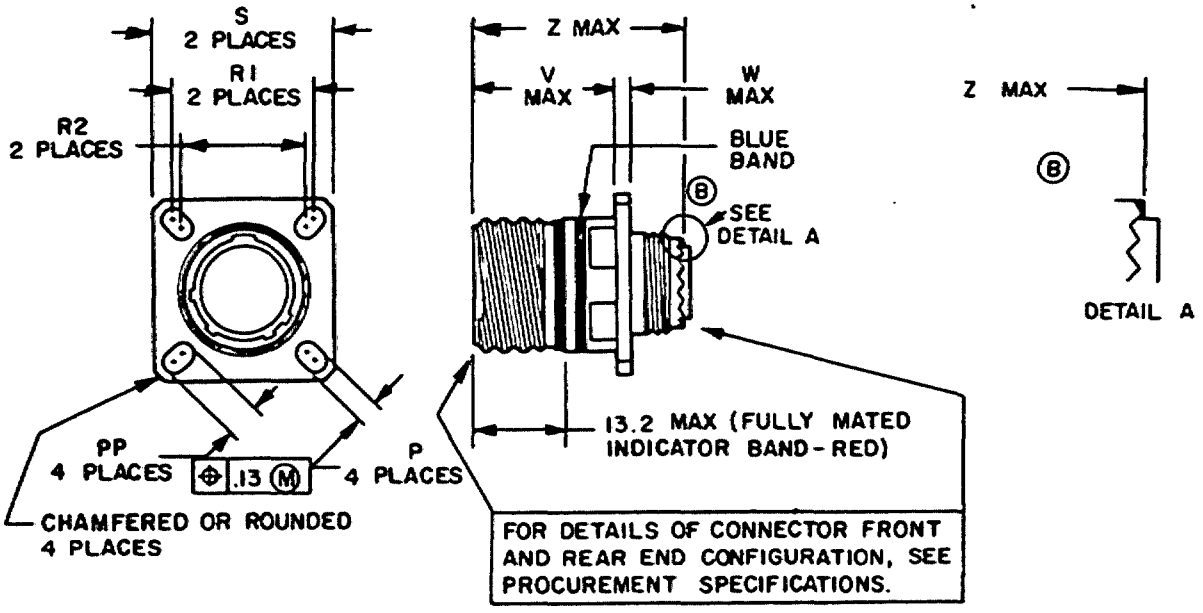


FIGURE 1. Receptacle, classes C, F, K, N and W.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	P DIA ±.20 Ⓑ	PP ±.20 Ⓑ	1/ R1	2/ R2	S ±.3	V MAX	W Ⓑ	Z MAX
9	A	3.25	5.49	18.26	15.09	23.8	20.9	2.5/2.1	31.5
11	B	"	4.93	20.62	18.26	26.2	"	"	"
13	C	"	4.93	23.01	20.62	28.6	"	"	"
15	D	"	4.39	24.61	23.01	31.0	"	"	"
17	E	"	4.93	26.97	24.61	33.3	"	"	"
19	F	"	4.93	29.36	26.97	36.5	20.9	2.5/2.1	"
21	G	3.25	4.93	31.75	29.36	39.7	20.1	3.2/2.1	"
23	H	3.91	6.15	34.93	31.75	42.9	20.1	3.2/2.1	"
25	J	3.91	6.15	38.10	34.93	46.0	20.1	3.2/2.1	31.5

1/ Front or rear panel mounting.
2/ Front panel mounting only.

Ⓑ NOTES:
1. Dimensions are in millimeters.

FIGURE 1. Receptacle, classes C, F, K, N and W - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with: DOD-C-38999/26.

For insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 20 W A 35 P N

- DOD No. prefix
- Specification sheet No.
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:

N is required for normal position

Ⓑ Classes N and F are not for Navy use and are inactive for Air Force new design use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3383-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984-505-038/A5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.