METRIC

MIL-DTL-38999/21B
11 June 2001
SUPERSEDING
DOD-C-38999/21A
15 June 1984

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

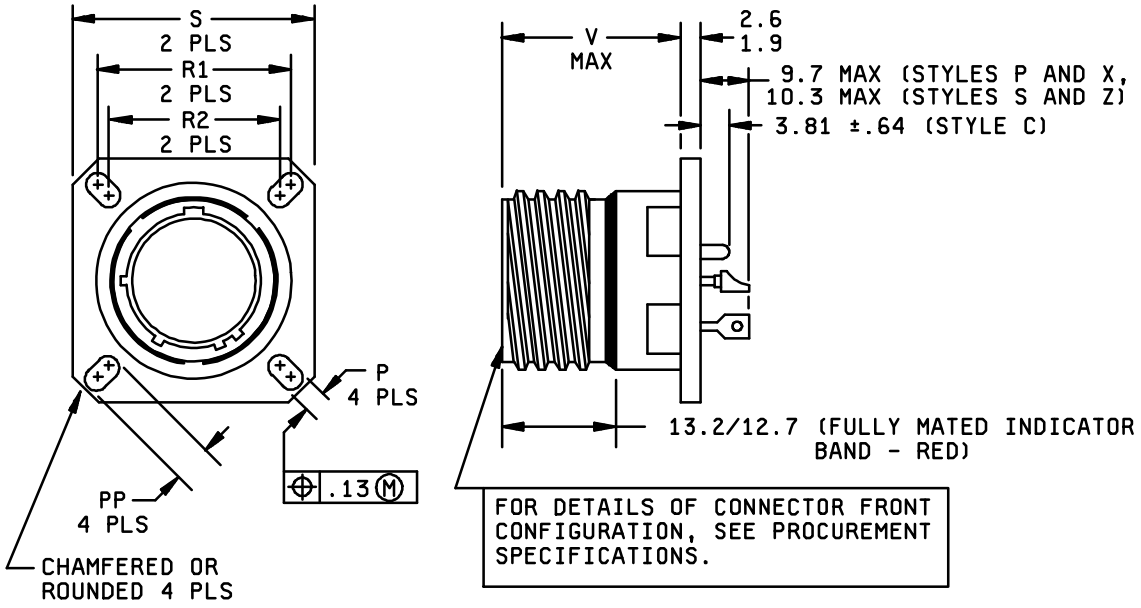

FIGURE 1. Receptacle, classes N and Y.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Connector dimensions

Shell size	Shell size code	P ± .20	PP ± .20	R1 (see note 3)	R2 (see note 4)	S ± .3	V max
9	A	3.25	5.49	18.26	15.09	23.8	21.4
11	B	3.25	4.93	20.62	18.26	26.2	21.4
13	C	3.25	4.93	23.01	20.62	28.6	21.4
15	D	3.25	4.39	24.61	23.01	31.0	21.4
17	E	3.25	4.93	26.97	24.61	33.3	21.4
19	F	3.25	4.93	29.36	26.97	36.5	21.4
21	G	3.25	4.93	31.75	29.36	39.7	21.4
23	H	3.91	6.15	34.93	31.75	42.9	21.4
25	J	3.91	6.15	38.10	34.93	46.0	21.4

NOTES:
1. Dimensions are in millimeters.
2. Polarizing position N is shown.
3. Front or rear panel mounting.
4. Front panel mounting only.

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/26.

Insert arrangements: See MIL-STD-1560.

Part or identifying Number (PIN) example:

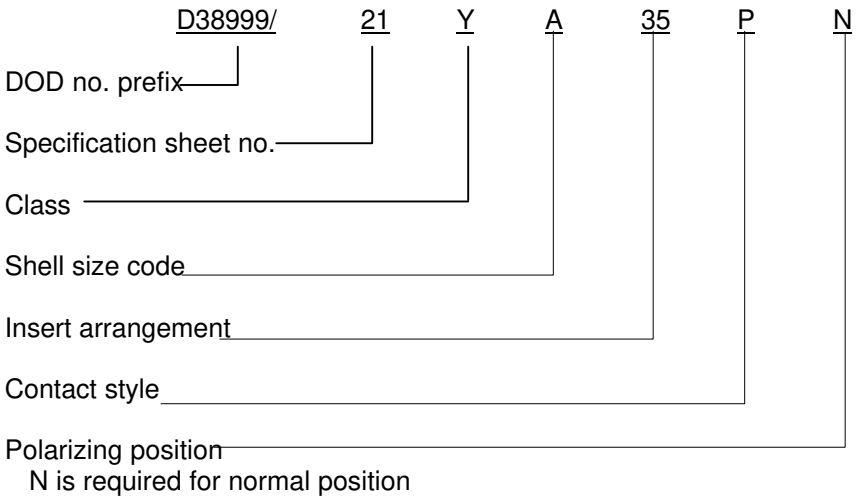

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA - IS

Preparing activity:
DLA - CC

(Project 5935-4301-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.