
FED. SUP CLASS
4730

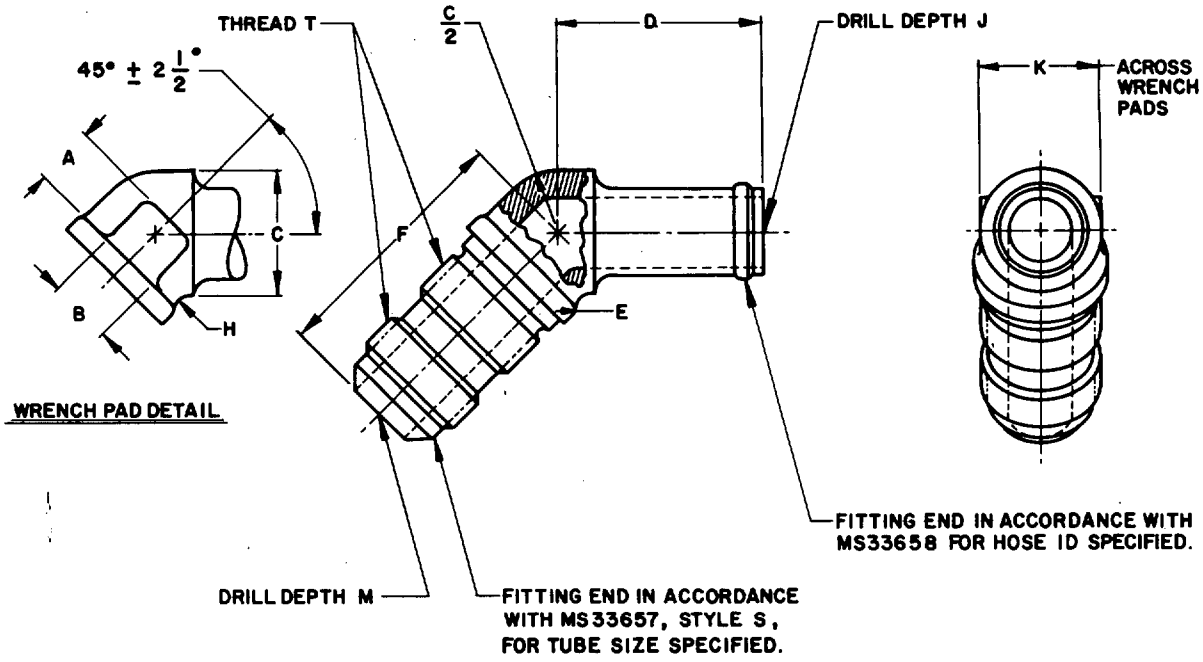

MATERIAL: COPPER ALLOY; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CRES, TYPE 304.
ADD K AFTER DASH NUMBER FOR CRES, TYPE 316.
ADD S AFTER DASH NUMBER FOR CRES, TYPE 347.
ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.

EXAMPLE OF PART NUMBERS:
AN839-8 - ELBOW, 1/2 TUBING, COPPER ALLOY.
AN839-8D - ELBOW, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN839-8J - ELBOW, 1/2 TUBING, CRES, TYPE 304.
AN839-8K - ELBOW, 1/2 TUBING, CRES, TYPE 316.
AN839-8S - ELBOW, 1/2 TUBING, CRES, TYPE 347.
AN839-8W - ELBOW, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

USE IN MANNER INDICATED ON MS21344 AND AND10065.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(7) ENTIRE STANDARD REVISED

APPROVED 24 JUL 44 REVISED (7) 30 AUG 82

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P. A. AIR FORCE - 82 Other Cust AT 99 (7)	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN839
		ELBOW, TUBE TO HOSE, 45°	
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 4730-F317

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.

DASH NO.	HOSE ID	TUBING OD	THREAD T (REF)	A APPROX	B APPROX	C DIA
4	1/4	1/4	7/16-20UNJF-3A	7/32	I/4	7/16
6	3/8	3/8	9/16-18UNJF-3A	9/32	3/8	9/16
8	1/2	1/2	3/4 -16UNJF-3A	11/32	7/16	3/4
10	5/8	5/8	7/8 -14UNJF-3A	7/16	1/2	7/8
12	3/4	3/4	1-1/16-12 UNJ-3A	1/2	9/16	1-1/16
16	1	1	1-5/16-12 UNJ-3A	9/16	11/16	1-5/16
20	1-1/4	1-1/4	1-5/8 -12 UNJ-3A	11/16	1	1-5/8
24	1-1/2	1-1/2	1-7/8- 12 UNJ-3A	3/4	1- 1/8	1-7/8

DASH NO.	D +3/64 -0	E RAD	F +3/64 -0	H RAD	J +3/64 -0	K	M +3/64 -0
4	1-11/16	1/16	1-27/64	1/16	1- 3/4	7/16	1-15/32
6	1-23/32		1- 9/16	3/32	1-51/64	9/16	1-39/64
8	1- 3/4	3/32	1-53/64		1-13/16	3/4	1-15/16
10	1-51/64		2- 3/64	1/8	1- 7/8	7/8	2-11/64
12	1-53/64		2- 9/32		1-61/64	1-1/16	2-27/64
16	1-57/64	1/8	2-25/64		2- 3/64	1-5/16	2-19/32
20	1-31/32		2-35/64	3/16	2-11/64	1-5/8	2-51/64
24	2- 1/32		2-43/64		2- 9/32	1-7/8	2-31/32

APPROVED 24 JULY 44 REVISED (7) FOR CHANGES SEE PAGES 1 & 2. 30AUG82

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

(7) ENTIRE STANDARD REVISED

P. A.	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN839
AIR FORCE- 82 Other Cust AF 99 7		ELBOW, TUBE TO HOSE, 45°	
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 4730-F317

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.