INCH-POUND

A-A-52025
February 4, 1991

COMMERCIAL ITEM DESCRIPTION

LEVELS, SURVEYING: ABNEY TYPE

The General Services Administration has authorized the use of this commercial item description in preference to Federal specification GG-L-260E.

This description covers two types of Abney surveying levels used for measuring land slope in degrees or percent of grade and for topographic surveying.

Salient characteristics.

Design: The Abney level shall consist of a sighting tube, an arc plate, an index arm, a bubble vial and two interchangeable graduated scale arcs. The Abney level shall have a nonslip mechanical or friction drive to adjust the index arm and bubble vial simultaneously, and a knurled knob locking mechanism to hold their position after adjustment. The Abney level shall have a flat bottom surface, which will support the level in an upright position, and a stud or ring for attachment of a neck strap. Each Abney level shall be supplied with a carrying case. The carrying case shall be a close fitting container with a belt loop. The opening for the belt loop shall accommodate a 2-inch web belt. The case closure flap shall have a fastener to keep the case closed. The carrying case shall have a provision to securely fasten a bubble vial adjusting tool inside the case.

Classification: The Abney surveying levels shall be of the following types.

Type I - With a glass reflector of transparent float, plate or sheet glass of select mirror quality.

Type II - With a metal reflector of polished chromium plating.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and other data which may improve this document should be sent by letter to: Commander, U.S. Army Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

Materials:

Metal. Metal parts shall be brass or aluminum, except that the interchangeable arcs shall be aluminum, corrosion-resistant steel, or nickel silver.

Glass. Glass used in the half lens shall be of optical quality, free of imperfections that distort or impair the field of view or focus.

Fabric. Fabric used in the case shall be leather, artificial leather, natural or plastic. The fabric shall not deposit any of its finish on the Abney level.

Finish: The Abney level shall be free of defects such as sharp edges, burrs, cracks, dents or other defects that could impair the serviceability of the Abney level. The eyepiece of the Abney level shall have rounded edges on any surface that will contact the user.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Quality assurance: The Abney levels shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Design not as specified.
2. Type not as specified.
3. Material not as specified.
4. Finish not as specified.
5. Packaging and marking not as specified.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the supplier's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Part or identifying number (PIN). The part or identifying number for Abney type surveying levels shall be as follows:

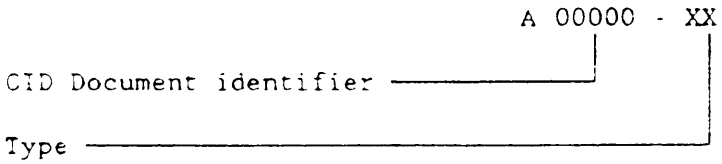

Notes.

1. Purchaser should specify type required.

2. When the commercial item description is used for acquisition, the commercial item certification must appear in the solicitation.

FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

MILITARY INTEREST:

Custodians
Army - ME
Navy - YD

Review activity
DLA - GS

User Activities
Army - CE
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA-FSS
USDA-AFS

Preparing activity:
Army - ME

Project 6675-0894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:04Z
Check the source to verify that this is the current version before use.