GG-T-1830A
December 10, 1973
SUPERSEDING
INT. FED. SPEC. GG-T-001830(GSA-FSS)
May 22, 1973

FEDERAL SPECIFICATION

TEMPLATES, DRAFTING, OFFICE LAYOUT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, Washington, DC 20406, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a transparent plastic office layout template for office furniture and building fixtures (see fig.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los, Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Methods of.

Military Standards:

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following publications of the issues in effect on dates of invitation for bids, form a part of this specification.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Agent, 1616 P Street, NW, Washington, D.C., 20036.)

FSC 6675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Material. Clear or greentinted, transparent, acrylic, vinyl plastic, or cellulose acetate butyrate shall be used in the manufacture of the office layout template.

3.2 The office layout template shall be thin, flat (in cross-section) and have a rectangular shape with rounded corners.

3.3 Dimensions.

Overall length - approximately 6 inches.
Overall width - approximately 3 3/8 inches.
Thickness - approximately 1/32 inch.
Rounded corners - approximate radius 3/16 inch

3.4 Graduations and markings. All graduations and markings shall be permanent, accurate, and colored to be clearly legible and visible against the background and shall be in accordance with figure 1. The graduations and markings shall pass the test in 4.5.

3.5 Cutouts. The cutouts for office furniture and building fixtures shall be in accordance with figure 1. The cutouts shall be either milled or die stamped.

3.6 Workmanship. The template shall be free from defects which affect appearance or impair serviceability. The template shall have no rough edges, burrs, or flashing and the working edges shall be straight.

3.7 Identification marking. The manufacturers name, trademark, or other identifying information shall be legibly marked on the template.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.2 Sampling. Samples for inspection shall be in accordance with MIL-STD-105.

4.3 Inspection. Samples selected in accordance with 4.2 shall be inspected for the following defects. Lot acceptance or rejection shall be based on acceptable quality level (AQL) per hundred units, as specified in table I, inspection level II.

TABLE I. Classification of defects

Defect	Classification	
	2.5	4.0
Material not as specified (3.1).	X	
Graduations or marking not as specified (3.4).	X	
Dimensions not as specified (3.3).		X
Cutouts not as specified (3.5).	X	
Identification not as specified (3.7)		X

Source: https://assist.dla.mil --.Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

4.4 Sampling. Sampling for test shall be in accordance with MIL-STD-105 with an AQL of 2.5 percent defective, inspection level II.

4.5 Test. A clean white cloth shall be moistened with water and rubbed under pressure, along the full length of one of the graduated surfaces of the template, keeping the same portion of the cloth in contact with the scale at all times. The graduations and markings shall be rubbed not less than ten times in each direction. Any adverse effect on the graduations or markings, or any traces of coloring on the cloth shall constitute failure of this test.

4.6 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing, and marking requirements comply with section 5 of this specification. Defects shall be scored in accordance with Table II. For examination of contents, the sample unit shall be one shipping container fully prepared for delivery selected just before the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be II and the AQL shall be 4.0 defects per hundred units.

TABLE II. Classification of preparation for delivery defects

Examine	Defect
Marking	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, Inadequate stapling, bulging, or distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. Each template shall be placed in an end opening bag or envelop. Six templates shall be packaged in a box conforming to PPP-B-566. The box shall be closed in accordance with the appendix to PPP-B-566.

5.1.1.1 Intermediate packaging. Unless otherwise specified (see 6.1), twelve packages of templates (72 templates) shall be intermediate packaged in a box conforming to PPP-B-566, style optional. The box shall be closed in accordance with the appendix to PPP-B-566. When specified (see 6.1), the box shall be waterproofed in accordance with MIL-P-116, method 1C-2.

5.1.2 Level C. The template shall be packaged to insure protection during shipment and safe delivery to destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A. Templates shall be packed in a box conforming to PPP-B-636, V3c. The box shall be closed, waterproofed, and banded in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Eight intermediate packages of templates (576 templates) shall be packed in a box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to PPP-B-636. When quantities less than specified are required (see 6.1), the templates shall be packed in a box conforming to that specified herein.

5.2.3 Level C. The templates packaged as specified in 5.1 shall be packed to comply with the National Motor Freight Classification rules or the Uniform Freight Classification rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, all marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.1).

5.3.1 Civil agencies. All marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. All marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

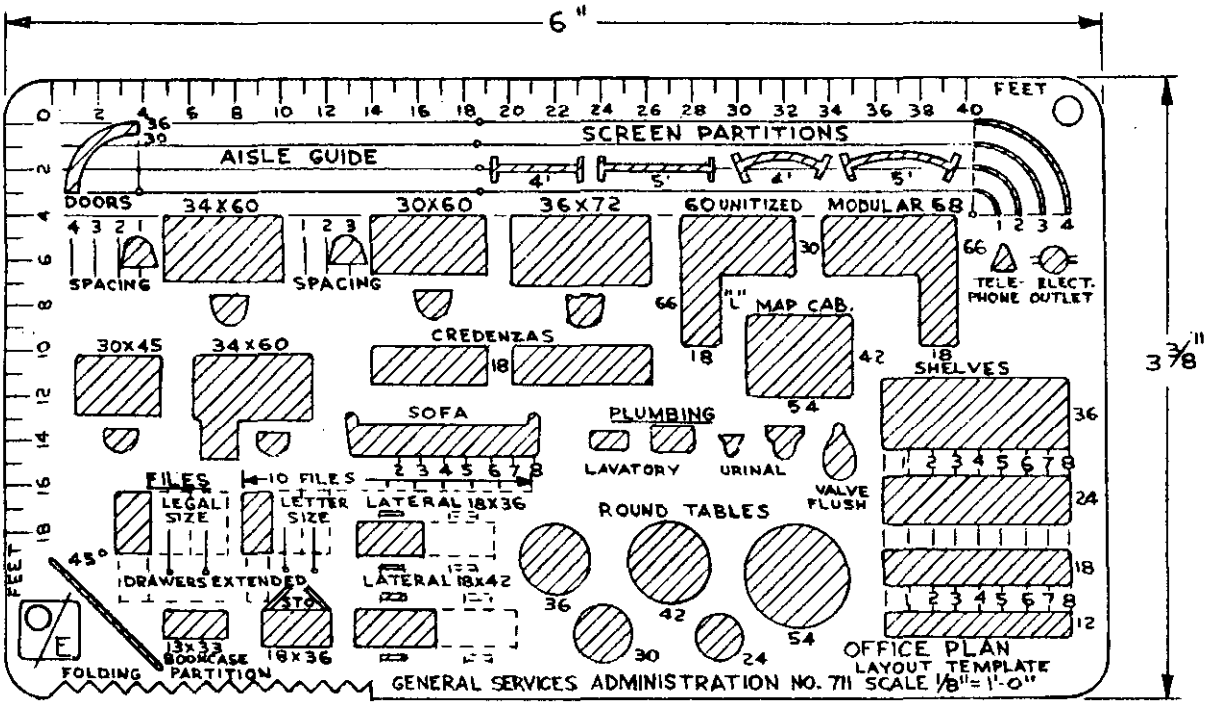


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Purchasers should select any desired options offered herein and procurement should specify the following:

(a) Title, symbol and date of this specification.
(b) Level of packaging and level of packing required (see 5.1 and 5.2).
(c) When quantities less than specified are required (see 5.2.2).
(d) When waterproofing of intermediate package is required (see 5.1.1.1).
(e) When inspection records are required (see 4.1).

Civil Agency Coordination Activities:

GSA - FSS, PBO

Preparing activity:

GSA - FSS

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974—603-108/484

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents See section 2 of this specification to obtain extra copies and other documents referenced herein Price 10 cents each

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.