
FSC 5310

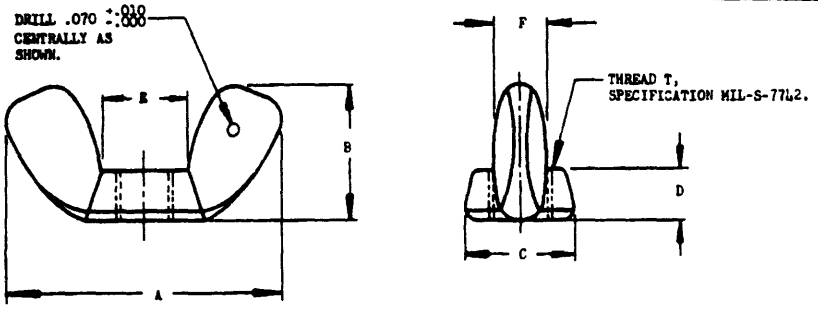

AN PART NUMBERS		(a) THREAD T	A		B		C		D		E		F	
ALLOY STEEL	BRASS		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
AN350-632	AN350B632	NO. 6-32 NC-2B	.670	.640	.360	.330	.328	.296	.140	.109	.210	.171	.109	.078
~~AN350-640~~ (b)	~~AN350B640~~	~~NO. 6-40 NF-2B~~												
AN350-832	AN350B832	NO. 8-32 NC-2B												
~~AN350-836~~ (b)	~~AN350B836~~	~~NO. 8-36 NF-2B~~												
AN350-1032	AN350B1032	NO.10-32 NF-2B	.656	.828	.452	.422	.425	.390	.173	.140	.265	.228	.140	.109
AN350-4	AN350B4	1/4-28 UNF-2B	1.082	1.042	.520	.480	.499	.453	.211	.171	.324	.265	.171	.140
AN350-5	AN350B5	5/16-24 UNF-2B	1.243	1.193	.635	.595	.575	.515	.242	.203	.387	.328	.203	.171
AN350-6	AN350B6	3/8-24 UNF-2B	1.436	1.376	.755	.695	.695	.640	.296	.261	.483	.421	.234	.203
AN350-7	AN350B7	7/16-20 UNF-2B	1.915	1.835	.941	.871	.921	.866	.390	.359	.642	.546	.312	.265
AN350-8	AN350B8	1/2-20 UNF-2B												

(a) CLASS 2 THREADS MAY BE SUBSTITUTED FOR CLASS 2B THREADS UNTIL EXISTING STOCKS OF NUTS WITH CLASS 2 THREADS ARE EXHAUSTED.

(b) SIZES NO. 6-40 AND 8-36 INACTIVE FOR DESIGN AFTER 12 AUGUST 1964.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

MATERIAL: STEEL, 50,000-PSI TENSILE STRENGTH, MINIMUM, COMMERCIAL GRADE.
BRASS, COMMERCIAL GRADE.

(5) FINISH: STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE I, CLASS 2.
BRASS, NONE.

COMMERCIAL PRODUCT. COLD FORMED, DROP FORGED NUTS PREFERRED.

NUTS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES.

INACTIVE FOR DESIGN AFTER 14 JANUARY 1966. USE MS35425 AND MS35426.

(5) **CANCELED IN PART AFTER 30 SEP 1970. ALL SIZES CANCELED EXCEPT, NO 6-40 AND NO 8-36. SEE INTERCHANGEABILITY TABLES ON MS35425 AND MS35426 FOR SUBSTITUTIVE PARTS.**

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN350
NONE	NUT, PLAIN, WING	

SUPERSEDES FORMER AIR FORCE AND NAVY STANDARD [illegible]

APPROVED 25 Nov 42 REVISED (1) 12 Aug 44 (2) 19 Jan 55 (3) 14 Jan 66 (4) 15 MAR 66 (5) 30 Sep 70

USER SYMBOLS:
REVIEWER SYMBOLS: NAVY - AS ARMY - MC USAF - 82 DSA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.