
USER ACTIVITIES
NAVY-SA

REVIEWER ACTIVITIES
ARMY-MI
DLA-IS

FED. SUP CLASS
5315

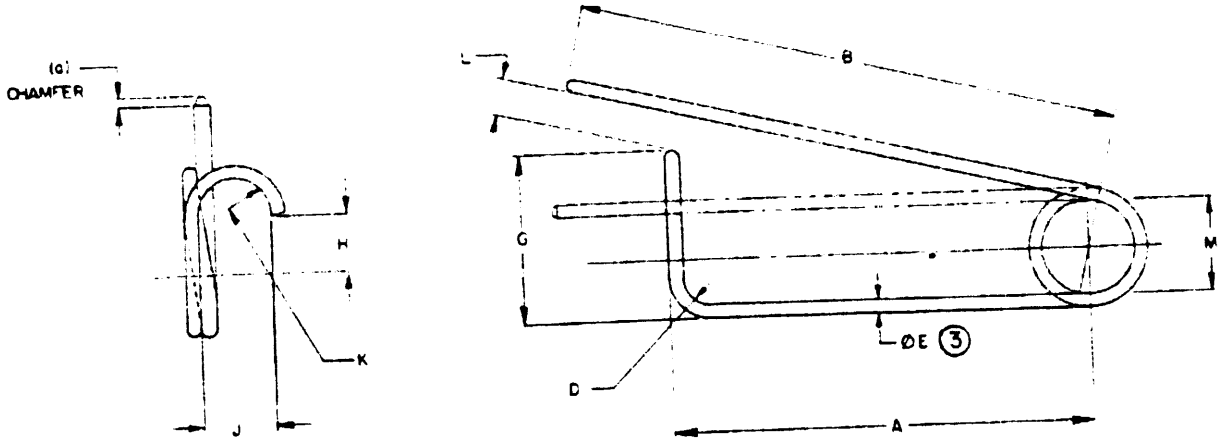

AN PART NUMBER	A	B	D RAD	ØE (3)	G	H	J	K RAD	L	M
AN416-1	1-1/16	1-3/8	3/32	.051	29/64	3/64	1/8	3/64	.125	.156
AN416-2	3/4	15/16	1/16	.041	1/4	1/32	3/32	1/32	.125	.156
(3) AN416-3	2.15	2.65	.080	.080	1/2	5/32	11/64	.080	.320	.250

(a) CHAMFER TO REMOVE BURRS AND SHARP EDGES.

MATERIAL: STEEL, SPECIFICATION QQ-W-470.

(3) FINISH: CADMIUM PLATE, SPECIFICATION QQ-P-416 TYPE II, CLASS 2.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/32, DECIMALS ±.(1).

(3) DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

"Review/User Information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 16 MAR 49 REVISED (1) 21 JAN 54 (2) 4 JAN 85 (3) 1 MAY 1987

(3) DENOTES CHANGES

P.A. AIR FORCE-82 Other Cust ARMY-AV AIR FORCE-99 PROCUREMENT SPECIFICATION NONE	AIR FORCE-NAVY AERONAUTICAL STANDARD (3) PIN, RETAINING, SAFETY	AN416 SHEET OF

SUPERSEDES USAF STANDARD 416
PROJECT NO. 5315-0420

AMSC N/A

DISC Form 1999
APR 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.