NOTICE—When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

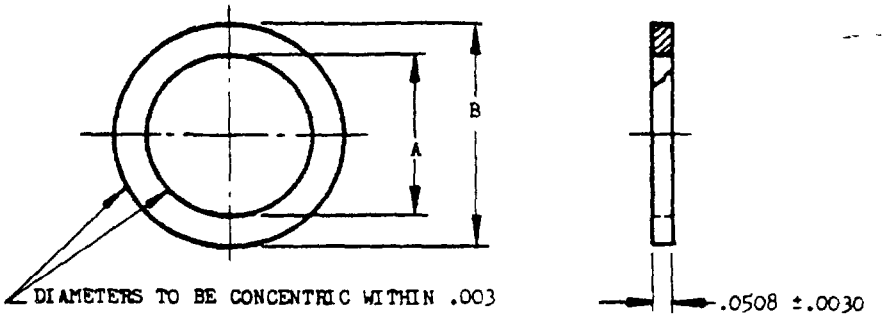

DASH NUMBER		TUBING OD	A +.010 -.(XX) DIA	B +.(XX) -.010 DIA
ALUMINUM	COPPER			
4A	4C	1/4	.443	.683
5A	5C	5/16	.505	.745
6A	6C	3/8	.568	.808
8A	8C	1/2	.755	.995
10A	10C	5/8	.880	1 120
12A	12C	3/4	1.068	1.370
16A	16C	1	1.318	1.620
20A	20C	1-1/4	1.630	1.870
24A	24C	1-1/2	1.880	2.120
28A	28C	1-3/4	2.255	2.495
32A	32C	2	2.505	2.745

(8) MATERIAL: ALUMINUM, SPECIFICATION QQ-A-250/1, TEMPER H14.
COPPER, SPECIFICATION QQ-C-576 CONDITION COLD ROLLED, SOFT ANNEALED.

FINISH: COPPER, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

COLOR COPPER, YELLOW

HEAT TREATMENT: COPPER GASKETS SHALL BE ANNEALED AFTER FABRICATION AND PRIOR TO PLATING.

SURFACES SHALL BE SMOOTH, FLAT AND FREE FROM NICKS AND SCRATCHES.

EXAMPLES OF PART NUMBERS: AN901-4A * ALUMINUM GASKET FOR 1/4 OD TUBING.
AN901-4C * COPPER GASKET FOR 1/4 OD TUBING.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES.

APPROVED 3 Feb 41 REVISED (1) 7 Jul 41 (2) 25 Jul 49 (3) 8 Sep 50 (4) 27 Mar 51 (5) 20 Mar 52 (6) 1 Jun 54 (7) 24 Oct 66 (8) 11 Jun 69

NOTE—This drawing was approved by joint action of the Air Force and Navy Departments as an aeronautical standard for use by all departments of both services. Changes in this drawing may be made only by joint action of the Air Force-Navy Aeronautical Standards Group or by the adoption of a revision. Suggested revisions are invited and should be forwarded to the Air Force-Navy Aeronautical Standards Group, Attn: ANSG, Wright-Patterson AFB, Ohio 45433. Revisions will be indicated by a number in parentheses after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN901
NONE	GASKET - METAL TUBE CONNECTION SEAL	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.