INCH-POUND

A-A-54965
15 July 1994

COMMERCIAL ITEM DESCRIPTION

TUBE, INHALER, (CONDUCTIVE RUBBER)

The General Services Administration has authorized the use of this Commercial Item Description.

This Commercial Item Description covers conductive rubber inhaler tubes suitable for using gas with a anesthesia apparatus.

Salient characteristics:

Style and design. The inhaler tubes shall be fabricated of rubber and formed by a molded or dipped process. The tubes shall be corrugated to prevent kinking and shall be sufficiently flexible to permit tube to be folded back upon itself without collapsing the airway. Tube shall have a permanent rubber insert (end fitting) in both ends and shall be in accordance with Figure 1. Tube inserts shall be attached to tube ends in a manner to eliminate any possibility of leakage between the inserts and the tube. The entire tube assembly shall be conductive.

Material. The tube shall be fabricated of natural or synthetic rubber or a combination of the two.

Electrical Conductivity. The maximum resistance value over a 3 foot section of the tubing shall be 1.0 megohm when tested with a direct voltage of 500 volts.

Accelerated aging test. After being subjected to a temperature of $158 \pm 2^{\circ}F$ for 7 days in an air oven, tubing shall not become tacky, brittle or decrease in tensile strength by more than 25 percent.

Identification marking. The tubing shall be permanently and legibly marked with the manufactures name or registered trademark and the date of manufacture (month and year).

AMSC N/A FSC 6515

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:40Z
Check the source to verify that this is the current version before use.

Fire and casualty hazards. The subject item shall comply with the fire and casualty hazards provisions of the applicable standards for operation in hazardous locations, Class 1, Group C and as prescribed by the National Fire Protection Association, NFPA No. 56, and be an approved type for the purpose intended, as determined by a nationally recognized testing agency, adequately equipped and competent to perform such services, as shall be evidenced by the attachment of its seal, stamp or label to the article, or issuance of a certificate. The stamp, label, seal or certificate of the Underwriters' Laboratories, Inc., or other testing laboratory approved by the contracting agency shall be considered acceptable evidence of such approval; however, in addition to the aforementioned, the contracting agency reserves the right to require the contractor to submit a laboratory test report which shall include test results and methods used to determine conformance.

Workmanship. Tubing shall be free from defects which detract from the appearance or impair the servicability of the item. Shall be free from cracks, blisters, weak areas, blisters, flash, rough areas, embedded particles, and foreign matter.

Unit. Each (EA). One inhaler tube, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after the delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:40Z
Check the source to verify that this is the current version before use.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Examination. Examination shall be conducted to determine compliance with specification requirements.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as specified herein. Unit of product for examination purposes shall be one inhaler tube as specified. Sampling shall be inspection level II with an Acceptable Quality Level (AQL) of 1.0.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified. Unit of product for test purposes shall be one inhaler tube. Sampling shall be inspection level S-2 with an AQL of 1.0.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:40Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:40Z
Check the source to verify that this is the current version before use.

NOTE: The following National Stock Numbers and their respective Item Identifications is covered by this document:

NATIONAL STOCK NUMBER	ITEM IDENTIFICATION
6515-00-302-1500	TUBE, INHALER, Conductive Rubber, 7/8 inch inside diameter by 32 inches long

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

Preparing Activity:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:


VA-OSS
USPHS
FDA-MPQAS

Project No. 6515-5706
Location: tony/rubber/dawne


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:40Z
Check the source to verify that this is the current version before use.

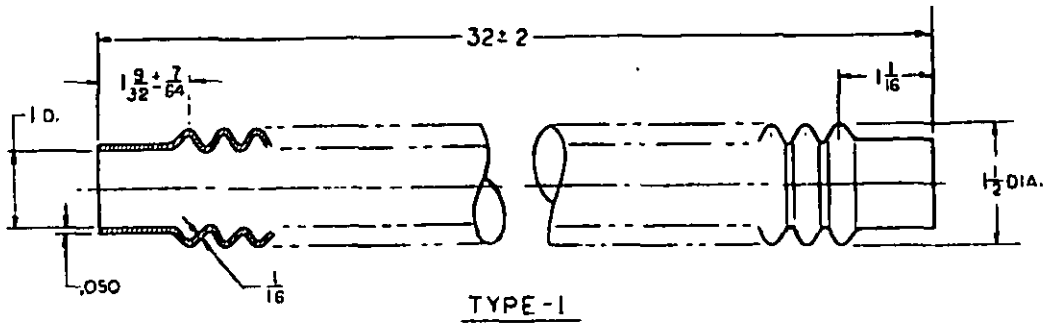


TYPE-1

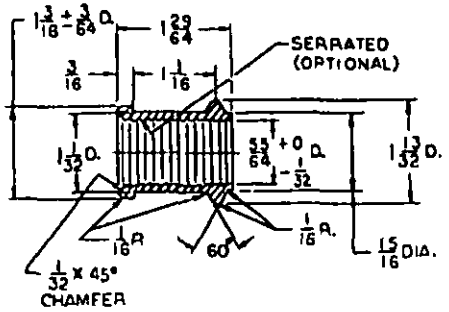

TUBE END INSERT (2 REQ'D)

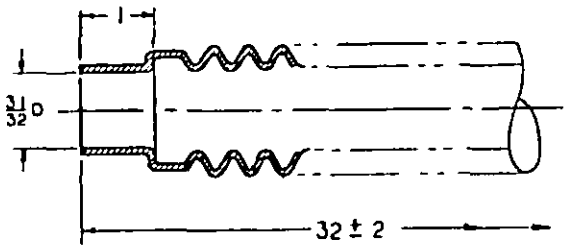


TYPE-2

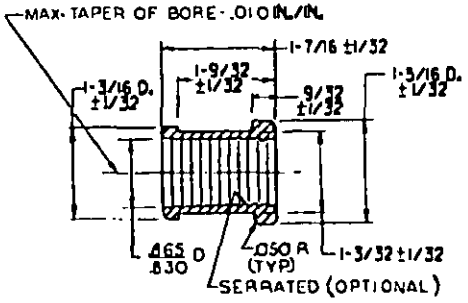


TUBE END INSERT (2-REQ'D)

GENERAL NOTES:

1. TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.
2. TUBE END INSERTS ARE FITTED TO ENDS OF TUBE.

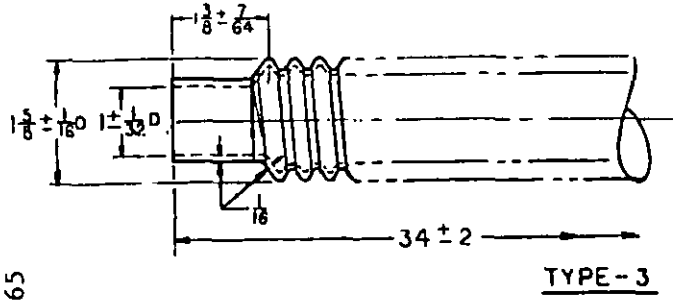

TYPE-3

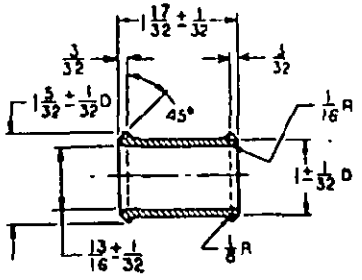

TUBE END INSERT (2-REQ'D.)

NSN 6515-00-302-1500

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.		
TOLERANCES ON:		
FRACTIONS	DECIMALS	ANGLES
±1/64	±.005	±2°

NOTE:

TUBE FOR USE WITH NSN'S: 6515-00-301-0400, 0430, AND 6515-00-782-3924.

A-A- 54965

FIGURE 1 TUBE, INHALER, CONDUCTIVE, RUBBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-54965	2. DOCUMENT DATE (YYMMDD) 940715

3. DOCUMENT TITLE
TUBE, INHALER, (CONDUCTIVE RUBBER)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial) [illegible]	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-MSE	b. TELEPHONE (Include Area Code) (1) Commercial (215)7372870	(2) AUTOVON 444-2870
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:40Z
Check the source to verify that this is the currentversion before use.